



ROBERT STĘPIEŃ
HURTOWNIA CZĘŚCI ELEKTRONICZNYCH
podzespoly-elektroniczne.pl

Triak BTA06-600TW;ST;6A;600V;5mA; TO220AB;przewlekany THT;RoHS



Dane techniczne:

Nazwa: BTA06-600TW

Typ: Triak

Prąd przewodzenia: 6A

Napięcie wsteczne: 600V

Prąd bramki: 5mA

Obudowa: TO220AB

Montaż: THT

Producent: ST

www.podzespoly-elektroniczne.pl

Robert Stępień Hurtownia Części Elektronicznych; Adres: ul. Wolumen 2, pawilon 71; 01-912 Warszawa; tel.: 601 296 402 /
sklep@podzespoly-elektroniczne.pl



6A TRIACS

BTA06-600TW


GENERAL DESCRIPTION

Available either in through-hole or surface-mount packages, the BTA06 - 600TW triac series is suitable for general purpose AC switching. They can be used as an ON/OFF function in applications such as static relays, heating regulation, induction motor starting circuits... or for phase control operation in light dimmers, motor speed controllers, ...

The snubberless versions (BTA...W series) are specially recommended for use on inductive loads, thanks to their high commutation performances. By using an internal ceramic pad, the BTA series provides voltage insulated tab (rated at 2500V RMS) complying with UL standards.

ABSOLUTE MAXIMUM RATINGS (Ta = 25 °C)

PARAMETER	Symbol	Value	Unit
Repetitive peak off-state voltages	V_{DRM}	600	V
peak off-state reverse voltages	V_{RRM}	600	V
RMS on-state current	I_{T}	6.0	A
Non-repetitive peak on-state current	I_{TSM}	63	A
Max. Operating Junction Temperature	T_{j}	110	°C
Storage Temperature	T_{stg}	-45~150	°C

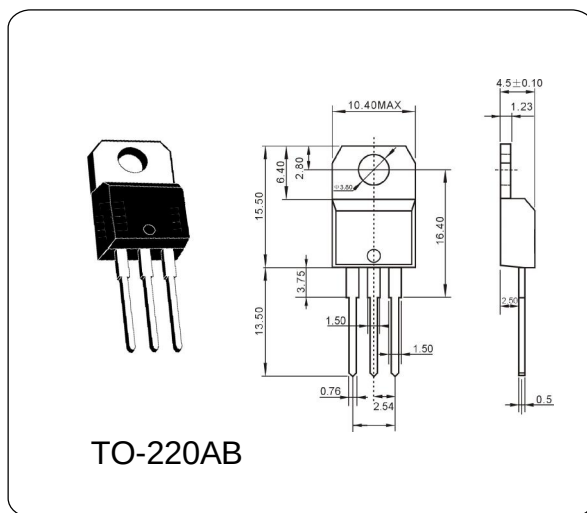

ELECTRICAL CHARACTERISTICS (Ta = 25 °C)

PARAMETER		Symbol	Test Conditions	Min.	Max	Unit
Repetitive peak off-state voltages		V_{DRM}	$I_{\text{D}}=0.1\text{mA}$	600	—	V
Repetitive peak off-state current		I_{DRM}	$V_{\text{DRM}}=520\text{V}$	—	10	uA
On-state voltage		V_{TM}	$I_{\text{T}}=5.5\text{A}$	—	1.55	V
Holding current		I_{H}	$I_{\text{T}}=0.5\text{A}, I_{\text{GT}}=20\text{mA}$	—	10.0	mA
Gate trigger Current	T2+G+	I_{GT}	$V_{\text{AK}}=12\text{V}, R_{\text{L}}=30\Omega$	—	5.0	mA
	T2+G-			—	5.0	
	T2-G-			—	5.0	
	T2-G+			—	10.0	
Gate trigger Voltage	T2+G+	V_{GT}	$V_{\text{D}}=12\text{V}, R_{\text{L}}=30\Omega$	—	1.3	V
	T2+G-			—	1.3	
	T2-G-			—	1.3	
	T2-G+			—	1.3	