



# Krokodylek 27.187.1 czerwony 10A;60V 41.5mm;wtykany(gn.ban.2mm) odp. MA1



## Dane techniczne:

Nazwa: Krokodylek 27.187.1

Kolor izolacji: czerwony

Długość całkowita: 41,5mm

Montaż przewodu: wtykany (gniazdo bananowe 2mm)

Prąd znamionowy: 10A

Napięcie znamionowe: 60V

Materiał styku: mosiądz niklowany

Materiał izolacji: poliamid

Zakres zaciskania: 8,5mm


Producent: Amass

Certyfikaty: RoHS

27.187.\*




**Material**  
 Insulator: PA  
 Body: Brass  
 Surface: Nickel plated  
**Rated voltage/current**  
 30Vac-60Vdc/Max.10A

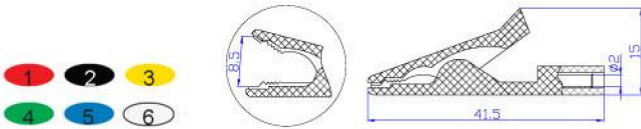

27.259.\*




**Material**  
 Insulator: ABS  
 Body: Steel  
 Surface: Nickel plated  
**Rated voltage/current**  
 30Vac-60Vdc/Max.19A

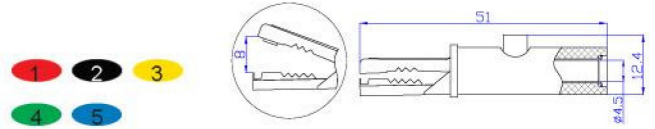

27.258.\*




**Material**  
 Insulator: PA  
 Body: Brass  
 Surface: Nickel plated  
**Rated voltage/current**  
 CATII 300V/Max.15A

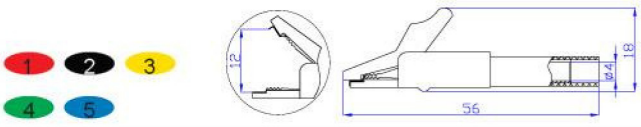

27.320.\*




**Material**  
 Insulator: ABS  
 Body: Brass  
 Surface: Gold plated

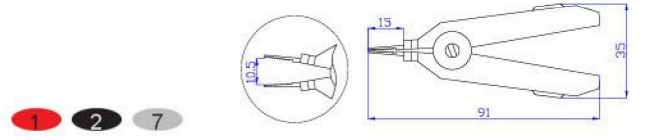

27.262.\*




**Material**  
 Insulator: PA  
 Body: Brass  
 Surface: Nickel plated  
**Rated voltage/current**  
 CATIII 1000V/Max.32A

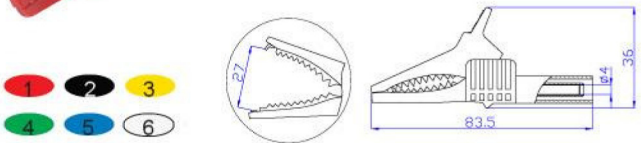

27.330.\*




**Material**  
 Insulator: PVC  
 Body: Brass  
 Surface: Nickel plated

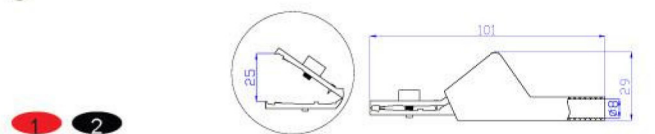

27.263.\*



**Material**  
 Insulator: PA  
 Body: Brass  
 Surface: Nickel plated  
**Rated voltage/current**  
 CATIII 1000V/Max.32A

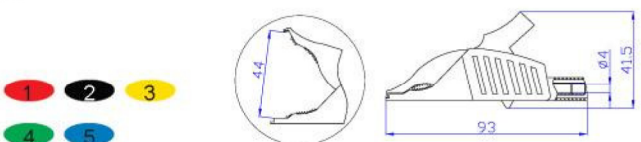

27.710/711/712.\*



**Material**  
 Insulator: PVC  
 Body: Steel  
 Surface: Nickel plated

