# 74HC365; 74HCT365

Hex buffer/line driver; 3-state
Rev. 5 — 12 February 2021

**Product data sheet** 

### 1. General description

The 74HC365; 74HCT365 is a hex buffer/line driver with 3-state outputs controlled by the output enable inputs ( $\overline{\text{OEn}}$ ). A HIGH on  $\overline{\text{OEn}}$  causes the outputs to assume a high impedance OFF-state. Inputs include clamp diodes. This enables the use of current limiting resistors to interface inputs to voltages in excess of  $V_{CC}$ .

#### 2. Features and benefits

- Wide supply voltage range from 2.0 V to 6.0 V
- · CMOS low power dissipation
- · High noise immunity
- · Latch-up performance exceeds 100 mA per JESD 78 Class II Level B
- · Complies with JEDEC standards:
  - JESD8C (2.7 V to 3.6 V)
  - JESD7A (2.0 V to 6.0 V)
- Non-inverting outputs
- Input levels:
  - For 74HC365: CMOS level
  - For 74HCT365: TTL level
- · ESD protection:
- HBM JESD22-A114F exceeds 2000 V
  - MM JESD22-A115-A exceeds 200 V
- Multiple package options
- Specified from -40 °C to +85 °C and from -40 °C to +125 °C


### 3. Ordering information

#### **Table 1. Ordering information**

| Type number             | Package           |         |   |          |
|-------------------------|-------------------|---------|---|----------|
|                         | Temperature range | Name    | Description   | Version  |
| 74HC365D                | -40 °C to +125 °C | SO16    | plastic small outline package; 16 leads; body width 3.9 mm                | SOT109-1 |
| 74HCT365D               |                   |         |   |          |
| 74HCT365DB              | -40 °C to +125 °C | SSOP16  | plastic shrink small outline package; 16 leads;<br>body width 5.3 mm      | SOT338-1 |
| 74HC365PW<br>74HCT365PW | -40 °C to +125 °C | TSSOP16 | plastic thin shrink small outline package; 16 leads;<br>body width 4.4 mm | SOT403-1 |




## 4. Functional diagram

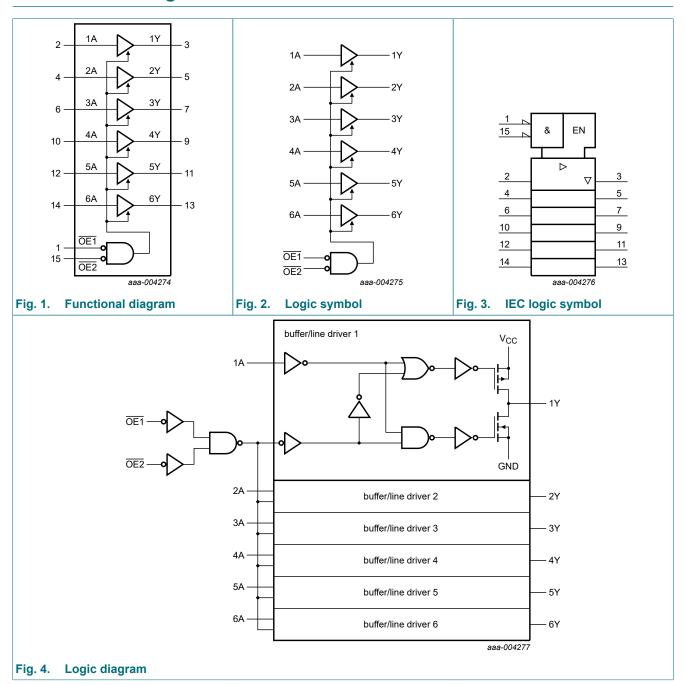

### 5. Pinning information

### 5.1. Pinning

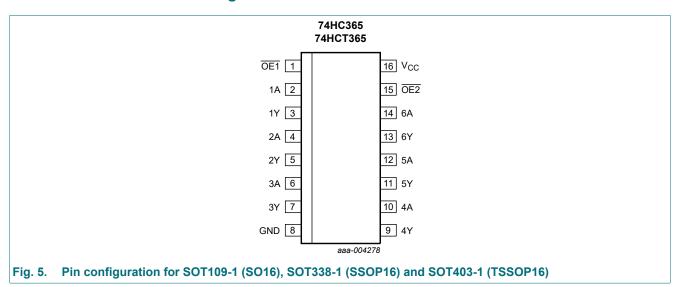

### 5.2. Pin description

Table 2. Pin description

| Symbol          | Pin | Description                        |
|-----------------|-----|------------------------------------|
| OE1             | 1   | output enable input 1 (active LOW) |
| 1A              | 2   | data input 1                       |
| 1Y              | 3   | data output 1                      |
| 2A              | 4   | data input 2                       |
| 2Y              | 5   | data output 2                      |
| 3A              | 6   | data input 3                       |
| 3Y              | 7   | data output 3                      |
| GND             | 8   | ground (0 V)                       |
| 4Y              | 9   | data output 4                      |
| 4A              | 10  | data input 4                       |
| 5Y              | 11  | data output 5                      |
| 5A              | 12  | data input 5                       |
| 6Y              | 13  | data output 6                      |
| 6A              | 14  | data input 6                       |
| OE2             | 15  | output enable input 2 (active LOW) |
| V <sub>CC</sub> | 16  | supply voltage                     |

### 6. Functional description

#### **Table 3. Function table**

 $H = HIGH \text{ voltage level}; L = LOW \text{ voltage level}; X = don't care; Z = high-impedance OFF-state.}$ 

| Control |     | Input | Output |
|---------|-----|-------|--------|
| OE1     | OE2 | nA    | nY     |
| L       | L   | L     | L      |
| L       | L   | Н     | Н      |
| X       | Н   | X     | Z      |
| Н       | X   | X     | Z      |

### 7. Limiting values

#### **Table 4. Limiting values**

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

| Symbol           | Parameter               | Conditions  | Min  | Max  | Unit |
|------------------|-------------------------|---|------|------|------|
| V <sub>CC</sub>  | supply voltage          |   | -0.5 | +7   | V    |
| I <sub>IK</sub>  | input clamping current  | $V_I < -0.5 \text{ V or } V_I > V_{CC} + 0.5 \text{ V}$ [1] | -    | ±20  | mA   |
| I <sub>OK</sub>  | output clamping current | $V_O < -0.5 \text{ V or } V_O > V_{CC} + 0.5 \text{ V}$ [1] | -    | ±20  | mA   |
| Io               | output current          | $V_O = -0.5 \text{ V to } (V_{CC} + 0.5 \text{ V})$         | -    | ±35  | mA   |
| I <sub>CC</sub>  | supply current          |   | -    | 70   | mA   |
| I <sub>GND</sub> | ground current          |   | -70  | -    | mA   |
| T <sub>stg</sub> | storage temperature     |   | -65  | +150 | °C   |
| P <sub>tot</sub> | total power dissipation | [2]   | -    | 500  | mW   |

<sup>[1]</sup> The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

For SOT338-1 (SSOP16) package: Ptot derates linearly with 8.5 mW/K above 91 °C.

For SOT403-1 (TSSOP16) package: Ptot derates linearly with 8.5 mW/K above 91 °C.

### 8. Recommended operating conditions

#### Table 5. Recommended operating conditions

Voltages are referenced to GND (ground = 0 V)

| Symbol           | Parameter                           | Conditions              |     | 74HC365 | 5               | 7   | 74HCT365 |                 |      |
|------------------|-------------------------------------|-------------------------|-----|---------|-----------------|-----|----------|-----------------|------|
|                  |                                     |                         | Min | Тур     | Max             | Min | Тур      | Max             |      |
| V <sub>CC</sub>  | supply voltage                      |                         | 2.0 | 5.0     | 6.0             | 4.5 | 5.0      | 5.5             | V    |
| VI               | input voltage                       |                         | 0   | -       | V <sub>CC</sub> | 0   | -        | V <sub>CC</sub> | V    |
| Vo               | output voltage                      |                         | 0   | -       | V <sub>CC</sub> | 0   | -        | V <sub>CC</sub> | V    |
| T <sub>amb</sub> | ambient temperature                 |                         | -40 | +25     | +125            | -40 | +25      | +125            | °C   |
| Δt/ΔV            | input transition rise and fall rate | V <sub>CC</sub> = 2.0 V | -   | -       | 625             | -   | -        | -               | ns/V |
|                  |                                     | V <sub>CC</sub> = 4.5 V | -   | 1.67    | 139             | -   | 1.67     | 139             | ns/V |
|                  |                                     | V <sub>CC</sub> = 6.0 V | -   | -       | 83              | -   | -        | -               | ns/V |

<sup>[2]</sup> For SOT109-1 (SO16) package: Ptot derates linearly with 12.4 mW/K above 110 °C.

### 9. Static characteristics

#### Table 6. Static characteristics 74HC365

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol                | Parameter                 | Conditions   | Min  | Тур  | Max  | Unit |
|-----------------------|---------------------------|--|------|------|------|------|
| T <sub>amb</sub> = 2  | 5 °C                      |  |      |      |      |      |
| V <sub>IH</sub>       | HIGH-level input voltage  | V <sub>CC</sub> = 2.0 V  | 1.5  | 1.2  | -    | V    |
|                       |                           | V <sub>CC</sub> = 4.5 V  | 3.15 | 2.4  | -    | V    |
|                       |                           | V <sub>CC</sub> = 6.0 V  | 4.2  | 3.2  | -    | V    |
| V <sub>IL</sub>       | LOW-level input voltage   | V <sub>CC</sub> = 2.0 V  | -    | 0.8  | 0.5  | V    |
|                       |                           | V <sub>CC</sub> = 4.5 V  | -    | 2.1  | 1.35 | V    |
|                       |                           | V <sub>CC</sub> = 6.0 V  | -    | 2.8  | 1.8  | V    |
| V <sub>OH</sub>       | HIGH-level output voltage | $V_I = V_{IH}$ or $V_{IL}$   | -    | -    | -    |      |
|                       |                           | I <sub>O</sub> = -20 μA; V <sub>CC</sub> = 2.0 V                             | 1.9  | 2.0  | -    | V    |
|                       |                           | I <sub>O</sub> = -20 μA; V <sub>CC</sub> = 4.5 V                             | 4.4  | 4.5  | -    | V    |
|                       |                           | I <sub>O</sub> = -20 μA; V <sub>CC</sub> = 6.0 V                             | 5.9  | 6.0  | -    | V    |
|                       |                           | I <sub>O</sub> = -6.0 mA; V <sub>CC</sub> = 4.5 V                            | 3.98 | 4.32 | -    | V    |
|                       |                           | I <sub>O</sub> = -7.8 mA; V <sub>CC</sub> = 6.0 V                            | 5.48 | 5.81 | -    | V    |
| V <sub>OL</sub>       | LOW-level output voltage  | $V_I = V_{IH}$ or $V_{IL}$   |      |      |      |      |
|                       |                           | I <sub>O</sub> = 20 μA; V <sub>CC</sub> = 2.0 V                              | -    | 0    | 0.1  | V    |
|                       |                           | I <sub>O</sub> = 20 μA; V <sub>CC</sub> = 4.5 V                              | -    | 0    | 0.1  | V    |
|                       |                           | I <sub>O</sub> = 20 μA; V <sub>CC</sub> = 6.0 V                              | -    | 0    | 0.1  | V    |
|                       |                           | I <sub>O</sub> = 6.0 mA; V <sub>CC</sub> = 4.5 V                             | -    | 0.15 | 0.26 | V    |
|                       |                           | I <sub>O</sub> = 7.8 mA; V <sub>CC</sub> = 6.0 V                             | -    | 0.16 | 0.26 | V    |
| l <sub>l</sub>        | input leakage current     | $V_I = V_{CC}$ or GND; $V_{CC} = 6.0 \text{ V}$                              | -    | -    | ±0.1 | μΑ   |
| l <sub>OZ</sub>       | OFF-state output current  | $V_I = V_{IH}$ or $V_{IL}$ ; $V_O = V_{CC}$ or GND; $V_{CC} = 6.0 \text{ V}$ | -    | -    | ±0.5 | μΑ   |
| I <sub>CC</sub>       | supply current            | $V_{I} = V_{CC}$ or GND; $I_{O} = 0$ A; $V_{CC} = 6.0 \text{ V}$             | -    | -    | 8.0  | μΑ   |
| Cı                    | input capacitance         |  | -    | 3.5  | -    | pF   |
| T <sub>amb</sub> = -4 | 40 °C to +85 °C           |  |      |      |      |      |
| V <sub>IH</sub>       | HIGH-level input voltage  | V <sub>CC</sub> = 2.0 V  | 1.5  | -    | -    | V    |
|                       |                           | V <sub>CC</sub> = 4.5 V  | 3.15 | -    | -    | V    |
|                       |                           | V <sub>CC</sub> = 6.0 V  | 4.2  | -    | -    | V    |
| V <sub>IL</sub>       | LOW-level input voltage   | V <sub>CC</sub> = 2.0 V  | -    | -    | 0.5  | V    |
|                       |                           | V <sub>CC</sub> = 4.5 V  | -    | -    | 1.35 | V    |
|                       |                           | V <sub>CC</sub> = 6.0 V  | -    | -    | 1.8  | V    |
| V <sub>OH</sub>       | HIGH-level output voltage | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>                          |      |      |      |      |
|                       |                           | I <sub>O</sub> = -20 μA; V <sub>CC</sub> = 2.0 V                             | 1.9  | -    | -    | V    |
|                       |                           | I <sub>O</sub> = -20 μA; V <sub>CC</sub> = 4.5 V                             | 4.4  | -    | -    | V    |
|                       |                           | I <sub>O</sub> = -20 μA; V <sub>CC</sub> = 6.0 V                             | 5.9  | -    | -    | V    |
|                       |                           | I <sub>O</sub> = -6.0 mA; V <sub>CC</sub> = 4.5 V                            | 3.84 | -    | -    | V    |
|                       |                           | $I_{\rm O}$ = -7.8 mA; $V_{\rm CC}$ = 6.0 V                                  | 5.34 | -    | -    | V    |

| $V_{CC} = 6.0 \text{ V}$ $V_{IL} \qquad \text{LOW-level input voltage} \qquad V_{CC} = 2.0 \text{ V}$ $V_{CC} = 4.5 \text{ V}$ $V_{CC} = 6.0 \text{ V}$ $V_{CC} = 6.0 \text{ V}$ $V_{OH} \qquad \text{HIGH-level output voltage} \qquad V_{I} = V_{IH} \text{ or } V_{IL}$  |      | Тур | Max   | Unit |
|---|------|-----|-------|------|
| $I_{O} = 20 \ \mu A; \ V_{CC} = 4.5 \ V$ $I_{O} = 20 \ \mu A; \ V_{CC} = 6.0 \ V$ $I_{O} = 6.0 \ mA; \ V_{CC} = 6.0 \ V$ $I_{O} = 7.8 \ mA; \ V_{CC} = 6.0 \ V$ $I_{O} = 7.8 \ mA; \ V_{CC} = 6.0 \ V$ $I_{OZ} \qquad \text{OFF-state output current} \qquad V_{I} = V_{IH} \ \text{or } V_{IL}; \ V_{O} = V_{CC} \ \text{or GND}; \ V_{CC} = 6.0 \ V$ $I_{CC} \qquad \text{supply current} \qquad V_{I} = V_{CC} \ \text{or GND}; \ I_{O} = 0 \ A; \ V_{CC} = 6.0 \ V$ $T_{amb} = -40 \ ^{\circ}C \ \text{to } +125 \ ^{\circ}C$ $V_{IH} \qquad HIGH-level input voltage \qquad V_{CC} = 2.0 \ V$ $V_{CC} = 4.5 \ V$ $V_{CC} = 6.0 \ V$ $V_{IL} \qquad LOW-level input voltage \qquad V_{CC} = 2.0 \ V$ $V_{CC} = 4.5 \ V$ $V_{CC} = 6.0 \ V$   |      |     |       |      |
| $I_{O} = 20 \ \mu A; \ V_{CC} = 6.0 \ V$ $I_{O} = 6.0 \ mA; \ V_{CC} = 4.5 \ V$ $I_{O} = 7.8 \ mA; \ V_{CC} = 6.0 \ V$ $I_{O} = 7.8 \ mA; \ V_{CC} = 6.0 \ V$ $I_{OZ} = 0.0 \ V = V_{CC} \ or \ GND; \ V_{CC} = 6.0 \ V$ $I_{CC} = 0.0 \ V = V_{CC} \ or \ GND; \ V_{CC} = 6.0 \ V$ $I_{CC} = 0.0 \ V = V_{CC} \ or \ GND; \ I_{O} = 0 \ A; \ V_{CC} = 6.0 \ V$ $I_{CC} = 0.0 \ V = V_{CC} \ or \ GND; \ I_{O} = 0 \ A; \ V_{CC} = 6.0 \ V$ $V_{CC} = 0.0 \ V = 0.0 \ V$ $V_{CC} = 0.0 \ V = 0.0 \ V$ $V_{CC} = 0.0 \ V = 0.0 \ V$ $V_{CC} = 0.0 \ V = 0.0 \ V$ $V_{CC} = 0.0 \ V = 0.0 \ V$ $V_{CC} = 0.0 \ V = 0.0 \ V$ $V_{CC} = 0.0 \ V = 0.0 \ V$ $V_{CC} = 0.0 \ V = 0.0 \ V$ $V_{CC} = 0.0 \ V = 0.0 \ V$ $V_{CC} = 0.0 \ V = 0.0 \ V$ $V_{CC} = 0.0 \ V = 0.0 \ V$ $V_{CC} = 0.0 \ V = 0.0 \ V$ $V_{CC} = 0.0 \ V = 0.0 \ V$ $V_{CC} = 0.0 \ V = 0.0 \ V$ $V_{CC} = 0.0 \ V$  | -    | -   | 0.1   | V    |
| $I_{O} = 6.0 \text{ mA; } V_{CC} = 4.5 \text{ V}$ $I_{O} = 7.8 \text{ mA; } V_{CC} = 6.0 \text{ V}$ $I_{I} \text{ input leakage current} \qquad V_{I} = V_{CC} \text{ or GND; } V_{CC} = 6.0 \text{ V}$ $I_{OZ} \text{ OFF-state output current} \qquad V_{I} = V_{IH} \text{ or } V_{IL}; V_{O} = V_{CC} \text{ or GND; } V_{CC} = 6.0 \text{ V}$ $I_{CC} \text{ supply current} \qquad V_{I} = V_{CC} \text{ or GND; } I_{O} = 0 \text{ A; } V_{CC} = 6.0 \text{ V}$ $T_{amb} = -40 \text{ °C to +125 °C}$ $V_{IH} \text{ HIGH-level input voltage} \qquad V_{CC} = 2.0 \text{ V}$ $V_{CC} = 4.5 \text{ V}$ $V_{CC} = 6.0 \text{ V}$ $V_{IL} \text{ LOW-level input voltage} \qquad V_{CC} = 2.0 \text{ V}$ $V_{CC} = 4.5 \text{ V}$ $V_{CC} = 4.5 \text{ V}$ $V_{CC} = 6.0 \text{ V}$   | -    | -   | 0.1   | V    |
| $I_{O} = 7.8 \text{ mA; } V_{CC} = 6.0 \text{ V}$ $I_{I} \qquad \text{input leakage current} \qquad V_{I} = V_{CC} \text{ or GND; } V_{CC} = 6.0 \text{ V}$ $I_{OZ} \qquad \text{OFF-state output current} \qquad V_{I} = V_{IH} \text{ or } V_{IL}; V_{O} = V_{CC} \text{ or GND; } V_{CC} = 6.0 \text{ V}$ $I_{CC} \qquad \text{supply current} \qquad V_{I} = V_{CC} \text{ or GND; } I_{O} = 0 \text{ A; } V_{CC} = 6.0 \text{ V}$ $T_{amb} = -40 \text{ °C to } +125 \text{ °C}$ $V_{IH} \qquad HIGH-level \text{ input voltage} \qquad V_{CC} = 2.0 \text{ V}$ $V_{CC} = 4.5 \text{ V}$ $V_{CC} = 6.0 \text{ V}$ $V_{IL} \qquad LOW-level \text{ input voltage} \qquad V_{CC} = 2.0 \text{ V}$ $V_{CC} = 4.5 \text{ V}$ $V_{CC} = 4.5 \text{ V}$ $V_{CC} = 6.0 \text{ V}$ $V_{CC} = 6.0 \text{ V}$ $V_{CC} = 6.0 \text{ V}$ $V_{CC} = 1.5 \text{ V}$  | -    | -   | 0.1   | V    |
| $ \begin{array}{ c c c c c } \hline I_{l} & \text{input leakage current} & V_{l} = V_{CC} \text{ or GND; } V_{CC} = 6.0 \text{ V} \\ \hline I_{OZ} & \text{OFF-state output current} & V_{l} = V_{IH} \text{ or } V_{IL}; V_{O} = V_{CC} \text{ or GND; } V_{CC} = 6.0 \text{ V} \\ \hline I_{CC} & \text{supply current} & V_{l} = V_{CC} \text{ or GND; } I_{O} = 0 \text{ A; } V_{CC} = 6.0 \text{ V} \\ \hline \hline T_{amb} = -40 \text{ °C to } +125 \text{ °C} \\ \hline V_{IH} & HIGH-level \text{ input voltage} & V_{CC} = 2.0 \text{ V} \\ \hline V_{CC} = 4.5 \text{ V} \\ \hline V_{CC} = 6.0 \text{ V} \\ \hline V_{CC} = 6.0 \text{ V} \\ \hline V_{CC} = 4.5 \text{ V} \\ \hline V_{CC} = 6.0 \text{ V} \\ \hline \end{array} $   | -    | -   | 0.33  | V    |
| $\begin{split} &I_{OZ} & \text{OFF-state output current} & V_I = V_{IH} \text{ or } V_{IL}; \ V_O = V_{CC} \text{ or GND}; \ V_{CC} = 6.0 \ V \\ &I_{CC} & \text{supply current} & V_I = V_{CC} \text{ or GND}; \ I_O = 0 \ A; \ V_{CC} = 6.0 \ V \\ & & & & & & & \\ &V_{IH} & & & & & & \\ & & & & & & & \\ & & & & & & \\ & & & & & & \\ &V_{IC} = 2.0 \ V \\ & & & & & & & \\ & & & & & & \\ & & & & & & \\ &V_{CC} = 4.5 \ V \\ & & & & & & \\ & & & & & \\ &V_{CC} = 2.0 \ V \\ & & & & & & \\ &V_{CC} = 2.0 \ V \\ & & & & & & \\ &V_{CC} = 4.5 \ V \\ & & & & & & \\ &V_{CC} = 6.0 \ V \\ & & & & & & \\ &V_{OC} = 6.0 \ V \\ & & & & & \\ &V_{OH} & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & \\ & & & & & & & \\ & & & & & & & \\ & & & & & & & & \\ & & & & & & & & \\ & & & & & & & & & & \\ & & & & & & & & & & & & & $  | -    | -   | 0.33  | V    |
| $\begin{array}{c ccccccccccccccccccccccccccccccccccc$   | -    | -   | ±1.0  | μΑ   |
| $ \begin{array}{c c} \textbf{T}_{amb} = \textbf{-40 °C to +125 °C} \\ \hline \\ V_{IH} & HIGH-level input voltage & V_{CC} = 2.0 \text{ V} \\ \hline \\ V_{CC} = 4.5 \text{ V} \\ \hline \\ V_{CC} = 6.0 \text{ V} \\ \hline \\ V_{IL} & LOW-level input voltage & V_{CC} = 2.0 \text{ V} \\ \hline \\ \hline \\ V_{CC} = 4.5 \text{ V} \\ \hline \\ \hline \\ V_{CC} = 4.5 \text{ V} \\ \hline \\ \hline \\ V_{CC} = 6.0 \text{ V} \\ \hline \\ \hline \\ V_{CC} = 6.0 \text{ V} \\ \hline \\ \hline \\ V_{CC} = 6.0 \text{ V} \\ \hline \\ \hline \\ V_{CC} = 6.0 \text{ V} \\ \hline \\ \hline \\ V_{CC} = 1.5 \text{ V} \\ \hline \\ \hline \\ \hline \\ V_{CC} = 1.5 \text{ V} \\ \hline \\ \hline \\ \hline \\ V_{CC} = 1.5 \text{ V} \\ \hline \\ \hline \\ V_{CC} = 1.5 \text{ V} \\ \hline \\ \hline \\ V_{CC} = 1.5 \text{ V} \\ \hline \\ \hline \\ V_{CC} = 1.5 \text{ V} \\ \hline \\ \hline \\ V_{CC} = 1.5 \text{ V} \\ \hline \\ \hline \\ V_{CC} = 1.5 \text{ V} \\ \hline \\ \hline \\ V_{CC} = 1.5 \text{ V} \\ \hline \\ \hline \\ V_{CC} = 1.5 \text{ V} \\ \hline \\ \hline \\ V_{CC} = 1.5 \text{ V} \\ \hline \\ \hline \\ V_{CC} = 1.5 \text{ V} \\$ | -    | -   | ±5.0  | μΑ   |
| $V_{IH}  \begin{array}{c} \text{HIGH-level input voltage} \\ \hline V_{CC} = 2.0 \text{ V} \\ \hline V_{CC} = 4.5 \text{ V} \\ \hline V_{CC} = 6.0 \text{ V} \\ \hline \end{array}$ $V_{IL}  \begin{array}{c} \text{LOW-level input voltage} \\ \hline V_{CC} = 2.0 \text{ V} \\ \hline V_{CC} = 2.0 \text{ V} \\ \hline \hline V_{CC} = 4.5 \text{ V} \\ \hline V_{CC} = 4.5 \text{ V} \\ \hline \hline V_{CC} = 6.0 \text{ V} \\ \hline \end{array}$ $V_{OH}  \begin{array}{c} \text{HIGH-level output voltage} \\ \hline \end{array}  \begin{array}{c} V_{I} = V_{IH} \text{ or } V_{IL} \\ \hline \end{array}$  | -    | -   | 80    | μΑ   |
| $V_{CC} = 4.5 \text{ V}$ $V_{CC} = 6.0 \text{ V}$ $V_{IL}$ $V_{IL}$ $V_{IL}$ $V_{CC} = 2.0 \text{ V}$ $V_{CC} = 4.5 \text{ V}$ $V_{CC} = 4.5 \text{ V}$ $V_{CC} = 6.0 \text{ V}$ $V_{CC} = 6.0 \text{ V}$ $V_{CH}$  |      |     | •     |      |
| $V_{IL} \begin{tabular}{lll} \hline V_{CC} &= 6.0 \ V \\ \hline V_{IL} \begin{tabular}{lll} \hline V_{CC} &= 6.0 \ V \\ \hline V_{CC} &= 2.0 \ V \\ \hline V_{CC} &= 4.5 \ V \\ \hline V_{CC} &= 6.0 \ V \\ \hline \hline V_{CH} \begin{tabular}{lll} \hline V_{CC} &= 0.0 \ V \\ \hline V_{CC} &= 0.0 \ V_{CC} \\ \hline V_{CC} &= 0.0 \ V_{$  | 1.5  | -   | -     | V    |
| $V_{IL} \qquad \text{LOW-level input voltage} \qquad \begin{array}{c} V_{CC} = 2.0 \text{ V} \\ \hline V_{CC} = 4.5 \text{ V} \\ \hline V_{CC} = 6.0 \text{ V} \\ \end{array}$ $V_{OH} \qquad \text{HIGH-level output voltage} \qquad \begin{array}{c} V_{I} = V_{IH} \text{ or } V_{IL} \\ \hline \end{array}$   | 3.15 | -   | -     | V    |
| $V_{CC} = 4.5 \text{ V}$ $V_{CC} = 6.0 \text{ V}$ $V_{OH}$ HIGH-level output voltage $V_{I} = V_{IH} \text{ or } V_{IL}$  | 4.2  | -   | -     | V    |
| $V_{CC} = 6.0 \text{ V}$ $V_{OH}$ HIGH-level output voltage $V_{I} = V_{IH} \text{ or } V_{IL}$   |      | -   | 0.5   | V    |
| V <sub>OH</sub> HIGH-level output voltage V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>   | -    | -   | 1.35  | V    |
|   | -    | -   | 1.8   | V    |
|   |      |     |       |      |
| $I_{O} = -20 \mu A; V_{CC} = 2.0 V$   | 1.9  | -   | -     | V    |
| $I_{O} = -20 \ \mu A; \ V_{CC} = 4.5 \ V$   | 4.4  | -   | -     | V    |
| $I_{O} = -20 \ \mu A; \ V_{CC} = 6.0 \ V$   | 5.9  | -   | -     | V    |
| $I_{O} = -6.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$   | 3.7  | -   | -     | V    |
| $I_{O} = -7.8 \text{ mA}; V_{CC} = 6.0 \text{ V}$   | 5.2  | -   | -     | V    |
| $V_{OL}$ LOW-level output voltage $V_I = V_{IH}$ or $V_{IL}$  |      |     |       |      |
| $I_{O} = 20 \mu A; V_{CC} = 2.0 V$  | -    | -   | 0.1   | V    |
| $I_{O} = 20 \mu A; V_{CC} = 4.5 V$  | -    | -   | 0.1   | V    |
| $I_{O} = 20 \mu A; V_{CC} = 6.0 \text{ V}$  | -    | -   | 0.1   | V    |
| $I_{O} = 6.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$  | -    | -   | 0.4   | V    |
| $I_{O} = 7.8 \text{ mA}; V_{CC} = 6.0 \text{ V}$  | -    | -   | 0.4   | V    |
| $I_I$ input leakage current $V_I = V_{CC}$ or GND; $V_{CC} = 6.0 \text{ V}$   | -    | -   | ±1.0  | μΑ   |
| $I_{OZ}$ OFF-state output current $V_I = V_{IH}$ or $V_{IL}$ ; $V_O = V_{CC}$ or GND; $V_{CC} = 6.0 \text{ V}$  | -    | -   | ±10.0 | μΑ   |
| $I_{CC}$ supply current $V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 6.0$ V  | -    | -   | 160   | μΑ   |

Table 7. Static characteristics 74HCT365

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol                | Parameter                 | Conditions   | Min  | Тур  | Max  | Unit |
|-----------------------|---------------------------|--|------|------|------|------|
| T <sub>amb</sub> = 2  | 5 °C                      |  |      |      |      |      |
| V <sub>IH</sub>       | HIGH-level input voltage  | V <sub>CC</sub> = 4.5 V to 5.5 V   | 2.0  | 1.6  | -    | V    |
| V <sub>IL</sub>       | LOW-level input voltage   | V <sub>CC</sub> = 4.5 V to 5.5 V   | -    | 1.2  | 0.8  | V    |
| V <sub>OH</sub>       | HIGH-level output         | $V_I = V_{IH}$ or $V_{IL}$ ; $V_{CC} = 4.5 \text{ V}$                        |      |      |      |      |
|                       | voltage                   | I <sub>O</sub> = -20 μA  | 4.4  | 4.5  | -    | V    |
|                       |                           | I <sub>O</sub> = -6.0 mA   | 3.98 | 4.32 | -    | V    |
| V <sub>OL</sub>       | LOW-level output          | $V_I = V_{IH}$ or $V_{IL}$ ; $V_{CC} = 4.5 \text{ V}$                        |      |      |      |      |
|                       | voltage                   | I <sub>O</sub> = 20 μA   | -    | 0    | 0.1  | V    |
|                       |                           | I <sub>O</sub> = 6.0 mA  | -    | 0.16 | 0.26 | V    |
| I <sub>I</sub>        | input leakage current     | $V_I = V_{CC}$ or GND; $V_{CC} = 5.5 \text{ V}$                              | -    | -    | ±0.1 | μΑ   |
| l <sub>OZ</sub>       | OFF-state output current  | $V_I = V_{IH}$ or $V_{IL}$ ; $V_O = V_{CC}$ or GND; $V_{CC} = 5.5 \text{ V}$ | -    | -    | ±0.5 | μΑ   |
| I <sub>CC</sub>       | supply current            | $V_{I} = V_{CC}$ or GND; $I_{O} = 0$ A; $V_{CC} = 5.5$ V                     | -    | -    | 8.0  | μΑ   |
| ΔI <sub>CC</sub>      | additional supply current | $V_I = V_{CC}$ - 2.1 V; other inputs at $V_{CC}$ or GND; $I_O = 0$ A         |      |      |      |      |
|                       |                           | pins nA  | -    | 100  | 360  | μΑ   |
|                       |                           | pin <del>OE1</del>   | -    | 100  | 360  | μΑ   |
|                       |                           | pin OE2  | -    | 90   | 324  | μΑ   |
| Cı                    | input capacitance         |  | -    | 3.5  | -    | pF   |
| T <sub>amb</sub> = -4 | 40 °C to +85 °C           |  |      | •    |      | •    |
| V <sub>IH</sub>       | HIGH-level input voltage  | V <sub>CC</sub> = 4.5 V to 5.5 V   | 2.0  | -    | -    | V    |
| V <sub>IL</sub>       | LOW-level input voltage   | V <sub>CC</sub> = 4.5 V to 5.5 V   | -    | -    | 8.0  | V    |
| V <sub>OH</sub>       | HIGH-level output         | $V_I = V_{IH}$ or $V_{IL}$ ; $V_{CC} = 4.5 \text{ V}$                        |      |      |      |      |
|                       | voltage                   | I <sub>O</sub> = -20 μA  | 4.4  | -    | -    | V    |
|                       |                           | I <sub>O</sub> = -6.0 mA   | 3.84 | -    | -    | V    |
| V <sub>OL</sub>       | LOW-level output          | $V_I = V_{IH}$ or $V_{IL}$ ; $V_{CC} = 4.5 \text{ V}$                        |      |      |      |      |
|                       | voltage                   | Ι <sub>Ο</sub> = 20 μΑ   | -    | -    | 0.1  | V    |
|                       |                           | I <sub>O</sub> = 6.0 mA  | -    | -    | 0.33 | V    |
| I <sub>I</sub>        | input leakage current     | $V_I = V_{CC}$ or GND; $V_{CC} = 5.5 \text{ V}$                              | -    | -    | ±1.0 | μΑ   |
| l <sub>OZ</sub>       | OFF-state output current  | $V_I = V_{IH}$ or $V_{IL}$ ; $V_O = V_{CC}$ or GND; $V_{CC} = 5.5 \text{ V}$ |      |      | ±5.0 | μΑ   |
| I <sub>CC</sub>       | supply current            | $V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 5.5$ V                         | -    | -    | 80   | μΑ   |
| ΔI <sub>CC</sub>      | additional supply current | $V_I = V_{CC}$ - 2.1 V; other inputs at $V_{CC}$ or GND; $I_O = 0$ A         |      |      |      |      |
|                       |                           | pins nA  | -    | -    | 450  | μΑ   |
|                       |                           | pin OE1  | -    | -    | 450  | μΑ   |
|                       |                           | pin OE2  | -    | -    | 405  | μA   |

| Symbol                | Parameter                 | Conditions  | Min | Тур | Max   | Unit |
|-----------------------|---------------------------|---|-----|-----|-------|------|
| T <sub>amb</sub> = -4 | 10 °C to +125 °C          |   |     | '   | '     |      |
| V <sub>IH</sub>       | HIGH-level input voltage  | V <sub>CC</sub> = 4.5 V to 5.5 V  | 2.0 | -   | -     | V    |
| V <sub>IL</sub>       | LOW-level input voltage   | V <sub>CC</sub> = 4.5 V to 5.5 V  | -   | -   | 0.8   | V    |
| V <sub>OH</sub>       | HIGH-level output         | $V_I = V_{IH}$ or $V_{IL}$ ; $V_{CC} = 4.5 \text{ V}$                                 |     |     |       |      |
|                       | voltage                   | I <sub>O</sub> = -20 μA   | 4.4 | -   | -     | V    |
|                       |                           | I <sub>O</sub> = -6.0 mA  | 3.7 | -   | -     | V    |
|                       | LOW-level output          | $V_I = V_{IH}$ or $V_{IL}$ ; $V_{CC} = 4.5 \text{ V}$                                 |     |     |       |      |
|                       | voltage                   | I <sub>O</sub> = 20 μA  | -   | -   | 0.1   | V    |
|                       |                           | I <sub>O</sub> = 6.0 mA   | -   | -   | 0.4   | V    |
| I <sub>I</sub>        | input leakage current     | $V_I = V_{CC}$ or GND; $V_{CC} = 5.5 \text{ V}$                                       | -   | -   | ±1.0  | μΑ   |
| I <sub>OZ</sub>       | OFF-state output current  | $V_I = V_{IH}$ or $V_{IL}$ ; $V_O = V_{CC}$ or GND; $V_{CC} = 5.5 \text{ V}$          | -   | -   | ±10.0 | μA   |
| I <sub>CC</sub>       | supply current            | $V_{I} = V_{CC}$ or GND; $I_{O} = 0$ A; $V_{CC} = 5.5$ V                              | -   | -   | 160   | μΑ   |
| $\Delta I_{CC}$       | additional supply current | $V_I = V_{CC} - 2.1 \text{ V}$ ; other inputs at $V_{CC}$ or GND; $I_O = 0 \text{ A}$ |     |     |       |      |
|                       |                           | pins nA   | -   | -   | 490   | μA   |
|                       |                           | pin OE1   | -   | -   | 490   | μΑ   |
|                       |                           | pin <del>OE2</del>  | -   | -   | 441   | μA   |

## 10. Dynamic characteristics

#### Table 8. Dynamic characteristics 74HC365

Voltages are referenced to GND (ground = 0 V);  $C_L$  = 50 pF unless otherwise specified; see test circuit Fig. 8.

| Symbol               | Parameter                     | Conditions                                    |                         | Min | Тур | Max | Unit |    |
|----------------------|-------------------------------|---|-------------------------|-----|-----|-----|------|----|
| T <sub>amb</sub> = 2 | 5 °C                          | ,   |                         |     |     |     |      |    |
| t <sub>pd</sub>      | propagation delay             | nA to nY; see Fig. 6                          | [1]                     |     |     |     |      |    |
|                      |                               | V <sub>CC</sub> = 2.0 V                       |                         | -   | 30  | 95  | ns   |    |
|                      |                               | V <sub>CC</sub> = 4.5 V                       |                         | -   | 11  | 19  | ns   |    |
|                      |                               | V <sub>CC</sub> = 5 V; C <sub>L</sub> = 15 pF |                         | -   | 9   | -   | ns   |    |
|                      |                               | V <sub>CC</sub> = 6.0 V                       |                         | -   | 9   | 16  | ns   |    |
| en                   | enable time                   | OEn to nY; see Fig. 7                         | [2]                     |     |     |     |      |    |
|                      |                               |   | V <sub>CC</sub> = 2.0 V |     | -   | 47  | 150  | ns |
|                      |                               | V <sub>CC</sub> = 4.5 V                       |                         | -   | 17  | 30  | ns   |    |
|                      |                               | V <sub>CC</sub> = 6.0 V                       |                         | -   | 14  | 26  | ns   |    |
| dis                  | disable time                  | OEn to nY; see Fig. 7                         | [3]                     |     |     |     |      |    |
|                      |                               | V <sub>CC</sub> = 2.0 V                       |                         | -   | 61  | 150 | ns   |    |
|                      |                               | V <sub>CC</sub> = 4.5 V                       |                         | -   | 22  | 30  | ns   |    |
|                      |                               | V <sub>CC</sub> = 6.0 V                       |                         | -   | 18  | 26  | ns   |    |
| t                    | transition time               | see Fig. 6                                    | [4]                     |     |     |     |      |    |
|                      |                               | V <sub>CC</sub> = 2.0 V                       |                         | -   | 14  | 60  | ns   |    |
|                      |                               | V <sub>CC</sub> = 4.5 V                       |                         | -   | 5   | 12  | ns   |    |
|                      |                               | V <sub>CC</sub> = 6.0 V                       |                         | -   | 4   | 10  | ns   |    |
| C <sub>PD</sub>      | power dissipation capacitance | per buffer; $V_I$ = GND to $V_{CC}$           | [5]                     | -   | 40  | -   | pF   |    |

| Symbol                | Parameter         | Conditions              |     | Min | Тур | Max | Unit |
|-----------------------|-------------------|-------------------------|-----|-----|-----|-----|------|
| T <sub>amb</sub> = -4 | 40 °C to +85 °C   |                         |     |     |     | ı   | '    |
| t <sub>pd</sub>       | propagation delay | nA to nY; see Fig. 6    | [1] |     |     |     |      |
|                       |                   | V <sub>CC</sub> = 2.0 V |     | -   | -   | 120 | ns   |
|                       |                   | V <sub>CC</sub> = 4.5 V |     | -   | -   | 24  | ns   |
|                       |                   | V <sub>CC</sub> = 6.0 V |     | -   | -   | 20  | ns   |
| t <sub>en</sub>       | enable time       | OEn to nY; see Fig. 7   | [2] |     |     |     |      |
|                       |                   | V <sub>CC</sub> = 2.0 V |     | -   | -   | 190 | ns   |
|                       |                   | V <sub>CC</sub> = 4.5 V |     | -   | -   | 38  | ns   |
|                       |                   | V <sub>CC</sub> = 6.0 V |     | -   | -   | 33  | ns   |
| t <sub>dis</sub>      | disable time      | OEn to nY; see Fig. 7   | [3] |     |     |     |      |
|                       |                   | V <sub>CC</sub> = 2.0 V |     | -   | -   | 190 | ns   |
|                       |                   | V <sub>CC</sub> = 4.5 V |     | -   | -   | 38  | ns   |
|                       |                   | V <sub>CC</sub> = 6.0 V |     | -   | -   | 33  | ns   |
| t <sub>t</sub>        | transition time   | see <u>Fig. 6</u>       | [4] |     |     |     |      |
|                       |                   | V <sub>CC</sub> = 2.0 V |     | -   | -   | 75  | ns   |
|                       |                   | V <sub>CC</sub> = 4.5 V |     | -   | -   | 15  | ns   |
|                       |                   | V <sub>CC</sub> = 6.0 V |     | -   | -   | 13  | ns   |
| T <sub>amb</sub> = -4 | 40 °C to +125 °C  |                         |     |     |     |     |      |
| t <sub>pd</sub>       | propagation delay | nA to nY; see Fig. 6    | [1] |     |     |     |      |
|                       |                   | V <sub>CC</sub> = 2.0 V |     | -   | -   | 145 | ns   |
|                       |                   | V <sub>CC</sub> = 4.5 V |     | -   | -   | 29  | ns   |
|                       |                   | V <sub>CC</sub> = 6.0 V |     | -   | -   | 25  | ns   |
| t <sub>en</sub>       | enable time       | OEn to nY; see Fig. 7   | [2] |     |     |     |      |
|                       |                   | V <sub>CC</sub> = 2.0 V |     | -   | -   | 225 | ns   |
|                       |                   | V <sub>CC</sub> = 4.5 V |     | -   | -   | 45  | ns   |
|                       |                   | V <sub>CC</sub> = 6.0 V |     | -   | -   | 38  | ns   |
| t <sub>dis</sub>      | disable time      | OEn to nY; see Fig. 7   | [3] |     |     |     |      |
|                       |                   | V <sub>CC</sub> = 2.0 V |     | -   | -   | 225 | ns   |
|                       |                   | V <sub>CC</sub> = 4.5 V |     | -   | -   | 45  | ns   |
|                       |                   | V <sub>CC</sub> = 6.0 V |     | -   | -   | 38  | ns   |
| t <sub>t</sub>        | transition time   | see Fig. 6              | [4] |     |     |     |      |
|                       |                   | V <sub>CC</sub> = 2.0 V |     | -   | -   | 90  | ns   |
|                       |                   | V <sub>CC</sub> = 4.5 V |     | -   | -   | 18  | ns   |
|                       |                   | V <sub>CC</sub> = 6.0 V |     | -   | -   | 15  | ns   |
|                       | 1                 |                         |     |     |     |     |      |

- $t_{\text{pd}}$  is the same as  $t_{\text{PHL}}$  and  $t_{\text{PLH}}$ .
- $\dot{t}_{en}$  is the same as  $t_{PZH}$  and  $t_{PZL}$ .
- [3]  $t_{dis}$  is the same as  $t_{PHZ}$  and  $t_{PLZ}$ .
- t<sub>dis</sub> is the same as t<sub>THL</sub> and t<sub>TLH</sub>.
   C<sub>PD</sub> is used to determine the dynamic power dissipation (P<sub>D</sub> in μW).
   P<sub>D</sub> = C<sub>PD</sub> x V<sub>CC</sub><sup>2</sup> x f<sub>i</sub> x N + Σ(C<sub>L</sub> x V<sub>CC</sub><sup>2</sup> x f<sub>o</sub>) where:

 $f_i$  = input frequency in MHz;

f<sub>o</sub> = output frequency in MHz;

C<sub>L</sub> = output load capacitance in pF;

V<sub>CC</sub> = supply voltage in V;

N = number of inputs switching;

 $\Sigma(C_L \times V_{CC}^2 \times f_0) = \text{sum of outputs.}$ 

#### Table 9. Dynamic characteristics 74HCT365

Voltages are referenced to GND (ground = 0 V);  $C_L$  = 50 pF unless otherwise specified; see test circuit Fig. 8.

| Symbol                | Parameter                     | Conditions   |     | Min | Тур | Max | Unit |
|-----------------------|-------------------------------|--|-----|-----|-----|-----|------|
| T <sub>amb</sub> = 2  | 5 °C                          |  |     |     |     |     |      |
| t <sub>pd</sub>       | propagation delay             | nA to nY; see Fig. 6   | [1] |     |     |     |      |
|                       |                               | V <sub>CC</sub> = 4.5 V  |     | -   | 14  | 25  | ns   |
|                       |                               | V <sub>CC</sub> = 5 V; C <sub>L</sub> = 15 pF                      |     | -   | 11  | -   | ns   |
| t <sub>en</sub>       | enable time                   | OEn to nY; V <sub>CC</sub> = 4.5 V; see Fig. 7                     | [2] | -   | 18  | 35  | ns   |
| t <sub>dis</sub>      | disable time                  | OEn to nY; V <sub>CC</sub> = 4.5 V; see Fig. 7                     | [3] | -   | 23  | 35  | ns   |
| t <sub>t</sub>        | transition time               | V <sub>CC</sub> = 4.5 V; see <u>Fig. 6</u>                         | [4] | -   | 5   | 12  | ns   |
| $C_{PD}$              | power dissipation capacitance | per buffer; V <sub>I</sub> = GND to (V <sub>CC</sub> - 1.5 V)      | [5] | -   | 40  | -   | pF   |
| T <sub>amb</sub> = -  | 40 °C to +85 °C               |  |     |     |     |     |      |
| t <sub>pd</sub>       | propagation delay             | nA to nY; V <sub>CC</sub> = 4.5 V; see Fig. 6                      | [1] | -   | -   | 31  | ns   |
| t <sub>en</sub>       | enable time                   | $\overline{\text{OEn}}$ to nY; V <sub>CC</sub> = 4.5 V; see Fig. 7 | [2] | -   | -   | 44  | ns   |
| t <sub>dis</sub>      | disable time                  | OEn to nY; V <sub>CC</sub> = 4.5 V; see Fig. 7                     | [3] | -   | -   | 44  | ns   |
| t <sub>t</sub>        | transition time               | V <sub>CC</sub> = 4.5 V; see <u>Fig. 6</u>                         | [4] | -   | -   | 15  | ns   |
| T <sub>amb</sub> = -4 | 40 °C to +125 °C              |  |     |     |     |     |      |
| t <sub>pd</sub>       | propagation delay             | nA to nY; V <sub>CC</sub> = 4.5 V; see Fig. 6                      | [1] | -   | -   | 38  | ns   |
| t <sub>en</sub>       | enable time                   | OEn to nY; V <sub>CC</sub> = 4.5 V; see Fig. 7                     | [2] | -   | -   | 53  | ns   |
| t <sub>dis</sub>      | disable time                  | $\overline{\text{OEn}}$ to nY; V <sub>CC</sub> = 4.5 V; see Fig. 7 | [3] | -   | -   | 53  | ns   |
| t <sub>t</sub>        | transition time               | V <sub>CC</sub> = 4.5 V; see <u>Fig. 6</u>                         | [4] | -   | -   | 18  | ns   |

- [1]  $t_{pd}$  is the same as  $t_{PHL}$  and  $t_{PLH}$ .
- [2]  $\dot{t}_{en}$  is the same as  $t_{PZH}$  and  $t_{PZL}$ .
- [3]  $t_{\text{dis}}$  is the same as  $t_{\text{PHZ}}$  and  $t_{\text{PLZ}}.$
- [4]  $t_t$  is the same as  $t_{THL}$  and  $t_{TLH}$ .
- [5] C<sub>PD</sub> is used to determine the dynamic power dissipation (P<sub>D</sub> in μW).
   P<sub>D</sub> = C<sub>PD</sub> x V<sub>CC</sub><sup>2</sup> x f<sub>i</sub> x N + Σ(C<sub>L</sub> x V<sub>CC</sub><sup>2</sup> x f<sub>o</sub>) where:
   f<sub>i</sub> = input frequency in MHz;

f<sub>o</sub> = output frequency in MHz;

C<sub>L</sub> = output load capacitance in pF;

V<sub>CC</sub> = supply voltage in V;

N = number of inputs switching;

 $\Sigma(C_L \times V_{CC}^2 \times f_o) = \text{sum of outputs.}$ 

#### 10.1. Waveforms and test circuit



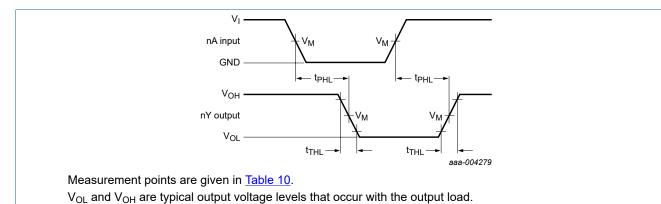


Fig. 6. Propagation delay data input (nA) to output (nY) and output transition time



**Table 10. Measurement points** 

| Туре     | Input              | Output             |                       |                       |  |  |  |
|----------|--------------------|--------------------|-----------------------|-----------------------|--|--|--|
|          | V <sub>M</sub>     | V <sub>M</sub>     | V <sub>X</sub>        | V <sub>Y</sub>        |  |  |  |
| 74HC365  | 0.5V <sub>CC</sub> | 0.5V <sub>CC</sub> | 0.1 × V <sub>CC</sub> | 0.9 × V <sub>CC</sub> |  |  |  |
| 74HCT365 | 1.3 V              | 1.3 V              | 0.1 × V <sub>CC</sub> | 0.9 × V <sub>CC</sub> |  |  |  |

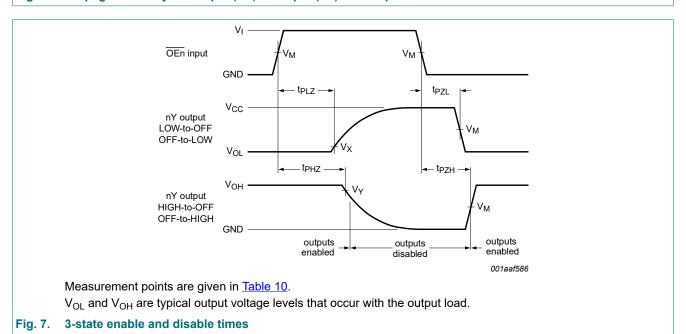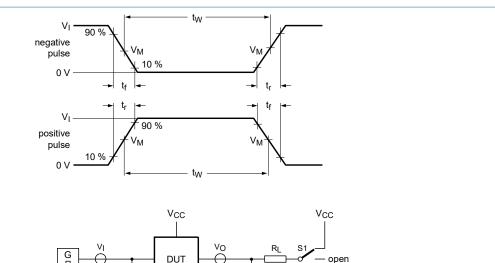

001aad983

Test data is given in Table 11.

Definitions test circuit:

 $R_T$  = Termination resistance should be equal to output impedance  $Z_o$  of the pulse generator

 $C_L$  = Load capacitance including jig and probe capacitance

R<sub>L</sub> = Load resistance

S1 = Test selection switch

Fig. 8. Test circuit for measuring switching times


Table 11. Test data

| Туре     | Input           |                                 | Load           |                | S1 position                         |                                     |                                     |
|----------|-----------------|---------------------------------|----------------|----------------|-------------------------------------|-------------------------------------|-------------------------------------|
|          | V <sub>I</sub>  | t <sub>r</sub> , t <sub>f</sub> | C <sub>L</sub> | R <sub>L</sub> | t <sub>PHL</sub> , t <sub>PLH</sub> | t <sub>PZH</sub> , t <sub>PHZ</sub> | t <sub>PZL</sub> , t <sub>PLZ</sub> |
| 74HC365  | V <sub>CC</sub> | 6 ns                            | 15 pF, 50 pF   | 1 kΩ           | open                                | GND                                 | V <sub>CC</sub>                     |
| 74HCT365 | 3 V             | 6 ns                            | 15 pF, 50 pF   | 1 kΩ           | open                                | GND                                 | V <sub>CC</sub>                     |

### 11. Package outline

#### SO16: plastic small outline package; 16 leads; body width 3.9 mm

SOT109-1

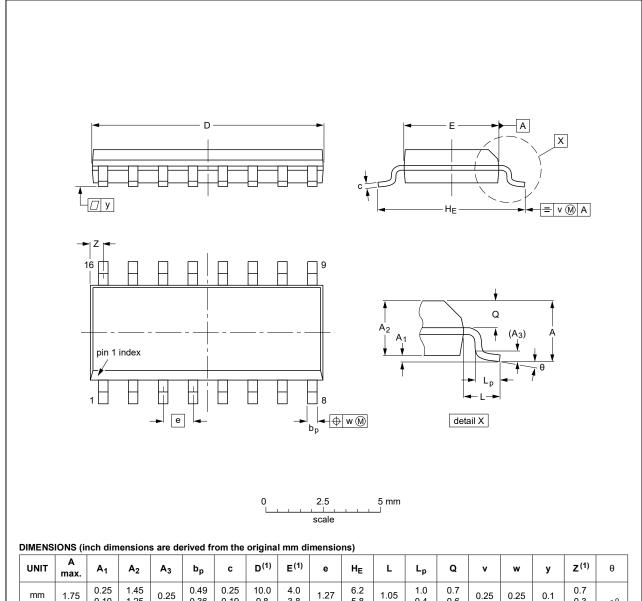

| UNIT   | A<br>max. | A <sub>1</sub> | A <sub>2</sub> | A <sub>3</sub> | bp           | С                | D <sup>(1)</sup> | E <sup>(1)</sup> | е    | HE             | L     | Lp             | Q              | v    | w    | у     | Z <sup>(1)</sup> | θ  |
|--------|-----------|----------------|----------------|----------------|--------------|------------------|------------------|------------------|------|----------------|-------|----------------|----------------|------|------|-------|------------------|----|
| mm     | 1.75      | 0.25<br>0.10   | 1.45<br>1.25   | 0.25           | 0.49<br>0.36 | 0.25<br>0.19     | 10.0<br>9.8      | 4.0<br>3.8       | 1.27 | 6.2<br>5.8     | 1.05  | 1.0<br>0.4     | 0.7<br>0.6     | 0.25 | 0.25 | 0.1   | 0.7<br>0.3       | 8° |
| inches | 0.069     | 0.010<br>0.004 | 0.057<br>0.049 | 0.01           | ı            | 0.0100<br>0.0075 |                  | 0.16<br>0.15     | 0.05 | 0.244<br>0.228 | 0.041 | 0.039<br>0.016 | 0.028<br>0.020 | 0.01 | 0.01 | 0.004 | 0.028<br>0.012   | 0° |

1. Plastic or metal protrusions of 0.15 mm (0.006 inch) maximum per side are not included.

| OUTLINE  |        | REFER  | EUROPEAN | ISSUE DATE |            |                                 |
|----------|--------|--------|----------|------------|------------|---------------------------------|
| VERSION  | IEC    | JEDEC  | JEITA    |            | PROJECTION | ISSUE DATE                      |
| SOT109-1 | 076E07 | MS-012 |          |            |            | <del>99-12-27</del><br>03-02-19 |

Fig. 9. Package outline SOT109-1 (SO16)

#### SSOP16: plastic shrink small outline package; 16 leads; body width 5.3 mm

SOT338-1


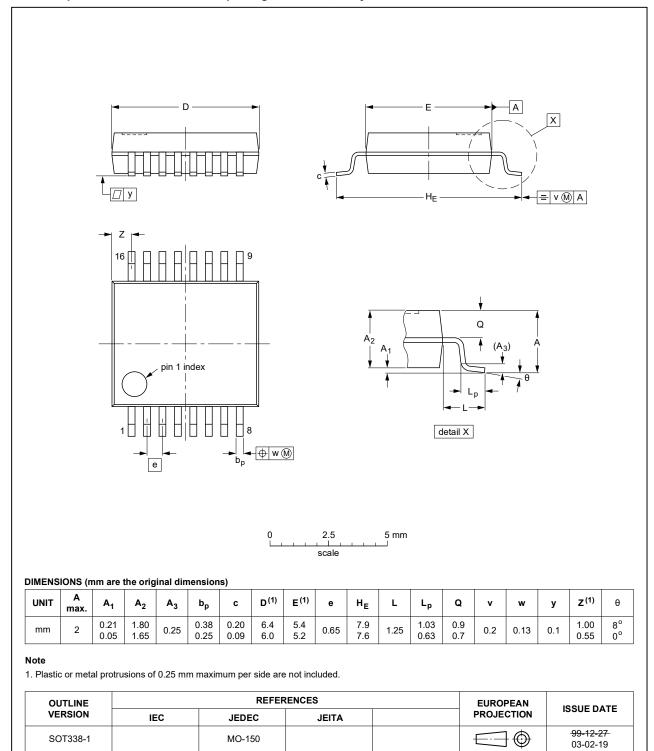


Fig. 10. Package outline SOT338-1 (SSOP16)

TSSOP16: plastic thin shrink small outline package; 16 leads; body width 4.4 mm

SOT403-1

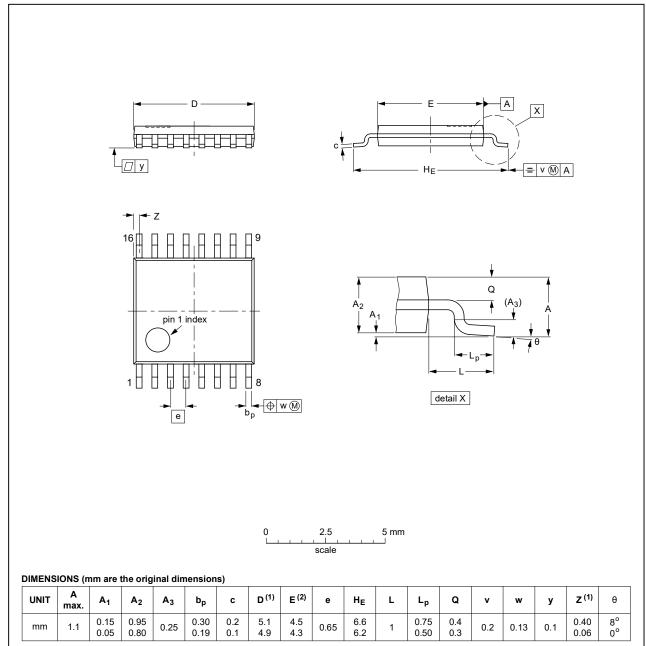

#### Notes

- 1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.
- 2. Plastic interlead protrusions of 0.25 mm maximum per side are not included.

| OUTLINE  |     | REFER  | EUROPEAN | ISSUE DATE |            |                                 |
|----------|-----|--------|----------|------------|------------|---------------------------------|
| VERSION  | IEC | JEDEC  | JEITA    |            | PROJECTION | ISSUE DATE                      |
| SOT403-1 |     | MO-153 |          |            |            | <del>99-12-27</del><br>03-02-18 |

Fig. 11. Package outline SOT403-1 (TSSOP16)

### 12. Abbreviations

#### **Table 12. Abbreviations**

| Acronym | Description                             |
|---------|---|
| CMOS    | Complementary Metal Oxide Semiconductor |
| DUT     | Device Under Test                       |
| ESD     | ElectroStatic Discharge                 |
| НВМ     | Human Body Model                        |
| MM      | Machine Model                           |

### 13. Revision history

#### Table 13. Revision history

| Document ID         | Release date  | Data sheet status  | Change notice     | Supersedes          |  |  |  |
|---------------------|---|--|-------------------|---------------------|--|--|--|
| 74HC_HCT365 v.5     | 20210212  | Product data sheet   | -                 | 74HC_HCT365 v.4     |  |  |  |
| Modifications:      | Nexperia. Legal texts have Section 1 and Type number 7  | this data sheet has been redes<br>we been adapted to the new co<br>Section 2 updated.<br>74HC365DB (SOT338-1 / SSO<br>ating values for P <sub>tot</sub> total powe | ompany name where | appropriate.        |  |  |  |
| 74HC_HCT365 v.4     | 20160127  | Product data sheet   | -                 | 74HC_HCT365 v.3     |  |  |  |
| Modifications:      | Type numbers  | 74HC365N and 74HCT365N   | (SOT38-4) removed |                     |  |  |  |
| 74HC_HCT365 v.3     | 20120905  | Product data sheet   | -                 | 74HC_HCT365_CNV v.2 |  |  |  |
| Modifications:      | <ul> <li>The format of this data sheet has been redesigned to comply with the new identity guidelines of NXP Semiconductors.</li> <li>Legal texts have been adapted to the new company name where appropriate.</li> </ul> |  |                   |                     |  |  |  |
| 74HC_HCT365_CNV v.2 | 19970829  | Product specification  | -                 | -                   |  |  |  |

### 14. Legal information

#### **Data sheet status**

| Document status [1][2]         | Product<br>status [3] | Definition  |
|--------------------------------|-----------------------|---|
| Objective [short] data sheet   | Development           | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet | Qualification         | This document contains data from the preliminary specification.                       |
| Product [short]<br>data sheet  | Production            | This document contains the product specification.                                     |

- Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <a href="https://www.nexperia.com">https://www.nexperia.com</a>.

#### **Definitions**

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

#### **Disclaimers**

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal

injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nexperia.com/profile/terms">http://www.nexperia.com/profile/terms</a>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by sustained.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

#### **Trademarks**

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

### **Contents**

| 1. General description              | 1  |
|-------------------------------------|----|
| 2. Features and benefits            | 1  |
| 3. Ordering information             | 1  |
| 4. Functional diagram               | 2  |
| 5. Pinning information              | 3  |
| 5.1. Pinning                        | 3  |
| 5.2. Pin description                | 3  |
| 6. Functional description           | 4  |
| 7. Limiting values                  | 4  |
| 8. Recommended operating conditions | 4  |
| 9. Static characteristics           | 5  |
| 10. Dynamic characteristics         | 8  |
| 10.1. Waveforms and test circuit    | 11 |
| 11. Package outline                 | 13 |
| 12. Abbreviations                   | 16 |
| 13. Revision history                | 16 |
| 14. Legal information               |    |
|                                     |    |

For more information, please visit: http://www.nexperia.com For sales office addresses, please send an email to: salesaddresses@nexperia.com Date of release: 12 February 2021

<sup>©</sup> Nexperia B.V. 2021. All rights reserved