




Krokodylek 27.258.2 czarny gn.ban.4mm;15A/300V

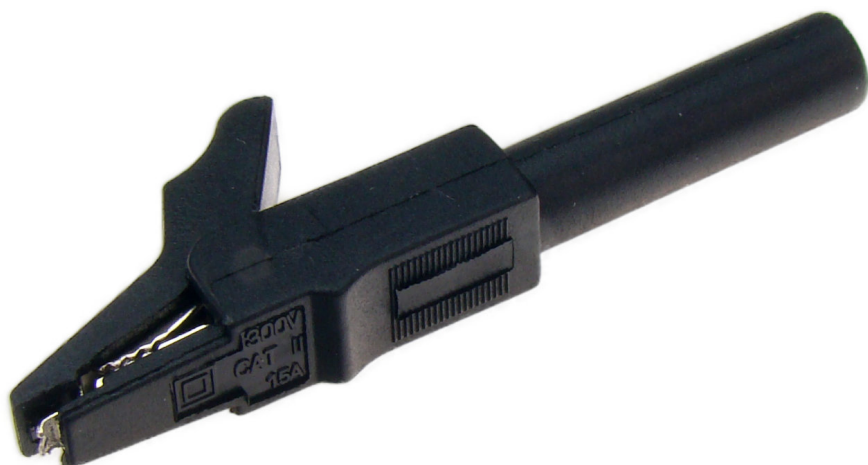

Dane techniczne:

Nazwa: Krokodylek 27.258.2

Kolor izolacji: czarny

Długość całkowita: 56mm

Montaż przewodu: wtykany (gniazdo bananowe 4mm)

Prąd znamionowy: 15A

Napięcie znamionowe: 300V

Materiał styku: mosiądz nikielowany

Materiał izolacji: poliamid

Zakres zaciskania: 12mm


Producent: Amass

Certyfikaty: RoHS

27.187.*




Material
 Insulator: PA
 Body: Brass
 Surface: Nickel plated
Rated voltage/current
 30Vac-60Vdc/Max.10A

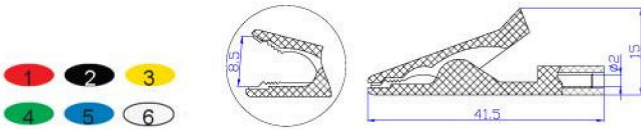

27.259.*




Material
 Insulator: ABS
 Body: Steel
 Surface: Nickel plated
Rated voltage/current
 30Vac-60Vdc/Max.19A

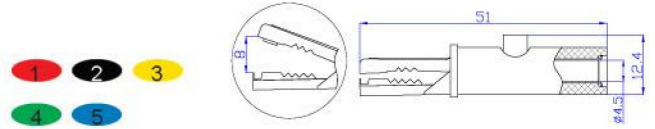

27.258.*




Material
 Insulator: PA
 Body: Brass
 Surface: Nickel plated
Rated voltage/current
 CATII 300V/Max.15A

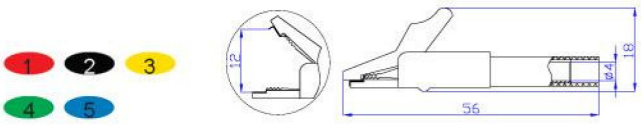

27.320.*




Material
 Insulator: ABS
 Body: Brass
 Surface: Gold plated

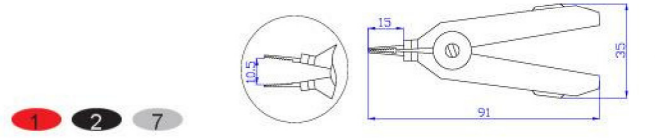

27.262.*




Material
 Insulator: PA
 Body: Brass
 Surface: Nickel plated
Rated voltage/current
 CATIII 1000V/Max.32A

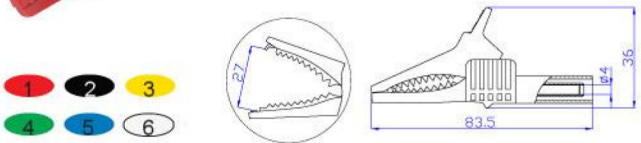

27.330.*




Material
 Insulator: PVC
 Body: Brass
 Surface: Nickel plated

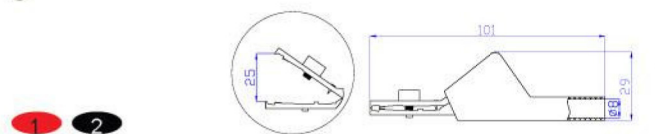

27.263.*



Material
 Insulator: PA
 Body: Brass
 Surface: Nickel plated
Rated voltage/current
 CATIII 1000V/Max.32A

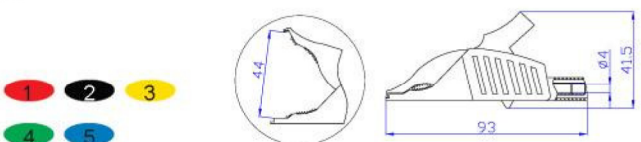

27.710/711/712.*



Material
 Insulator: PVC
 Body: Steel
 Surface: Nickel plated

