


1mm Test Lead


Test lead with the 1mm gold plated plug on both ends.



22.010. * Rated voltage/current: 30Vac-60Vdc/Max.6A 0.20mm² PVC 025 050

2mm Test Lead


Test lead with the 2mm gold plated plug on both ends.



22.020. * Rated voltage/current: 30Vac-60Vdc/Max.10A 0.50mm² PVC 025 050

2mm Test Lead


Test lead with the 2mm gold plated plug on both ends.



22.030. * Rated voltage/current: 30Vac-60Vdc/Max.10A 0.50mm² PVC 025 050
 22.040. * Rated voltage/current: 30Vac-60Vdc/Max.10A 0.50mm² SIL 025 050 100

2mm Test Lead


Test lead with the 2mm stackable gold plated plug on both ends.



22.050. * Rated voltage/current: 30Vac-60Vdc/Max.10A 0.50mm² PVC 025 050 100
 22.060. * Rated voltage/current: 30Vac-60Vdc/Max.10A 0.50mm² SIL 025 050 100

2mm Test Lead


Test lead with the 2mm stackable gold plated plug on both ends.



22.070. * Rated voltage/current: 30Vac-60Vdc/Max.10A 0.50mm² PVC 025 050 100
 22.080. * Rated voltage/current: 30Vac-60Vdc/Max.10A 0.50mm² SIL 025 050 100

4mm Test Lead


Test lead with the 4mm stackable nickel plated plug on both ends.

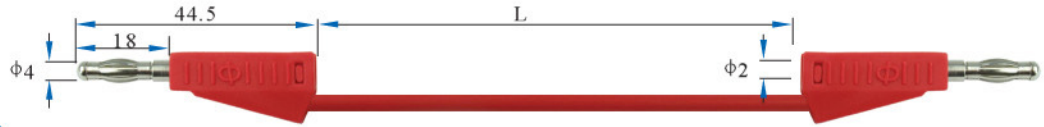

22.090. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	0.75mm ² PVC	025	050	100
22.100. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	0.75mm ² SIL	025	050	100
22.110. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.19A	1.0mm ² JBF	025	050	100

4mm Test Lead


Test lead with the 4mm stackable gold plated plug on both ends.

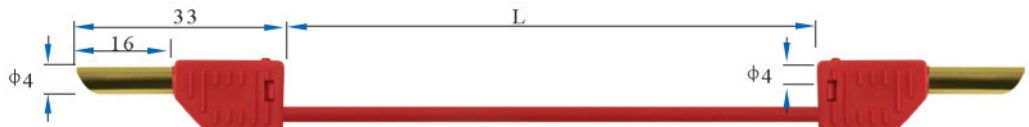

22.120. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	0.75mm ² PVC	025	050	100
22.130. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	0.75mm ² SIL	025	050	100
22.140. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.19A	1.0mm ² JBF	025	050	100

4mm Test Lead

Test lead with the injected 4mm stackable nickel plated plug on both ends.

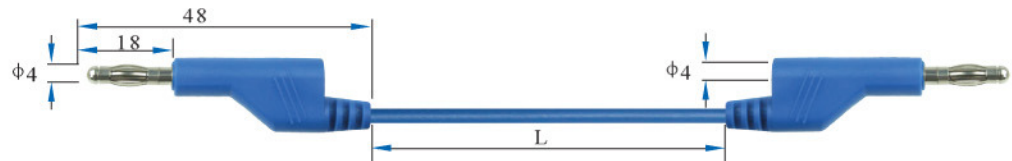

22.150. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	0.75mm ² PVC	025	050	100
22.160. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	0.75mm ² SIL	025	050	100
22.170. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.32A	2.5mm ² JBF	025	050	100

4mm Test Lead


Test lead with the 4mm nickel plated plug on both ends.



22.180. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	0.75mm ² PVC	025	050	100
22.190. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	0.75mm ² SIL	025	050	100
22.200. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.19A	1.0mm ² JBF	025	050	100

4mm Safety Test Lead

Safety test lead one end with the insulated 4mm straight plug and the other end with the insulated 4mm angled plug. Nickel plated plugs with the protective cap. Injected type.

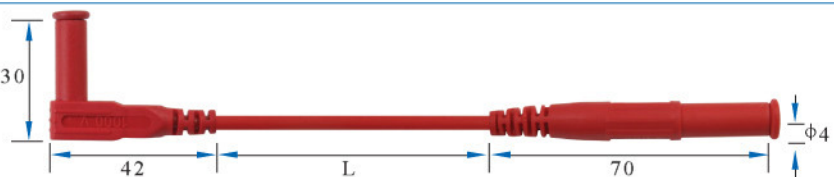


22.210. <input type="checkbox"/> *	Rated voltage/current: CATIII 1000V/15A	0.75mm ² PVC	025	050	100	CE
22.220. <input type="checkbox"/> *	Rated voltage/current: CATIII 1000V/19A	1.0mm ² JBF	025	050	100	CE
22.230. <input type="checkbox"/> *	Rated voltage/current: CATIII 1000V/32A	2.5mm ² SIL	025	050	100	CE



4mm Safety Test Lead

Safety test lead with the insulated 4mm angled plug on both ends. Nickel plated plugs with the protective cap. Injected type.




22.240.□*	Rated voltage/current: CATIII 1000V/15A	0.75mm ² PVC	025	050	100	CE
22.250.□*	Rated voltage/current: CATIII 1000V/19A	1.0mm ² JBF	025	050	100	CE
22.260.□*	Rated voltage/current: CATIII 1000V/32A	2.5mm ² SIL	025	050	100	CE



4mm Safety Test Lead

Safety test lead one end with the insulated 4mm straight plug and the other end with the insulated 4mm angled plug. Nickel plated plugs with the protective cap. Assembled type.

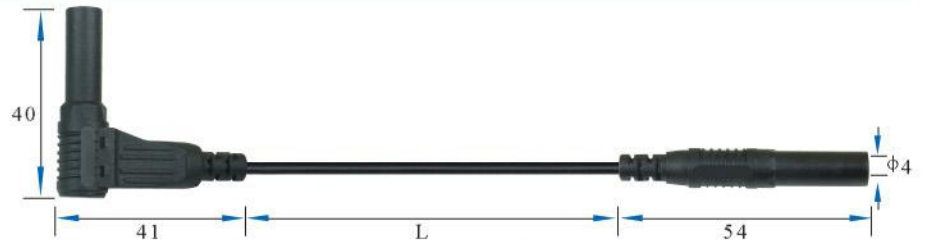

22.270.□*	Rated voltage/current: CATIII 1000V/15A	0.75mm ² PVC	025	050	100	CE
22.280.□*	Rated voltage/current: CATIII 1000V/19A	1.0mm ² JBF	025	050	100	CE
22.290.□*	Rated voltage/current: CATIII 1000V/32A	2.5mm ² SIL	025	050	100	CE



4mm Safety Test Lead

Safety test lead with the insulated 4mm straight plug on both ends. Nickel plated plugs with the protective cap. Assembled type.




22.300.□*	Rated voltage/current: CATIII 1000V/15A	0.75mm ² PVC	025	050	100	CE
22.310.□*	Rated voltage/current: CATIII 1000V/19A	1.0mm ² JBF	025	050	100	CE
22.320.□*	Rated voltage/current: CATIII 1000V/32A	2.5mm ² SIL	025	050	100	CE



Multimeter Test Lead

Test lead one end with the test probe and the other with the insulated 4mm straight plug. Nickel plated and assembled type.




22.330.□*	Rated voltage/current: CATIII 1000V/15A	0.75mm ² PVC	025	050	100	CE
22.340.□*	Rated voltage/current: CATIII 1000V/19A	1.0mm ² JBF	025	050	100	CE
22.350.□*	Rated voltage/current: CATIII 1000V/32A	2.5mm ² SIL	025	050	100	CE



Multimeter Test Lead

Test lead one end with the test probe and the other with the insulated 4mm angled plug. Nickel plated and assembled type.

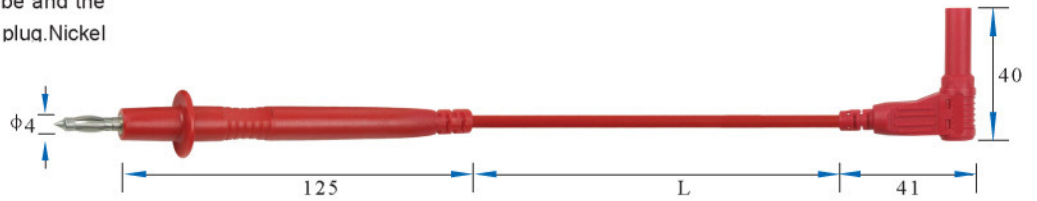

1 2

22.360.□*	Rated voltage/current: CATIII 1000V/15A	0.75mm ² PVC	025	050	100	CE
22.370.□*	Rated voltage/current: CATIII 1000V/19A	1.0mm ² JBF	025	050	100	CE
22.380.□*	Rated voltage/current: CATIII 1000V/32A	2.5mm ² SIL	025	050	100	CE

CE

4mm Safety Test Lead

Safety test lead with the insulated 4mm stackable plug on both ends. Nickel plated plugs with the red cap.




1 2 3 4 5 0

22.390.□*	Rated voltage/current: CATIII 600V/19A	1.0mm ² JBF	025	050	100	CE
22.400.□*	Rated voltage/current: CATIII 600V/32A	2.5mm ² PVC	025	050	100	CE
22.410.□*	Rated voltage/current: CATIII 600V/32A	2.5mm ² SIL	025	050	100	CE

CE

4mm Safety Test Lead

Safety test lead with the insulated 4mm stackable plug on both ends. Nickel plated plugs with the red cap.

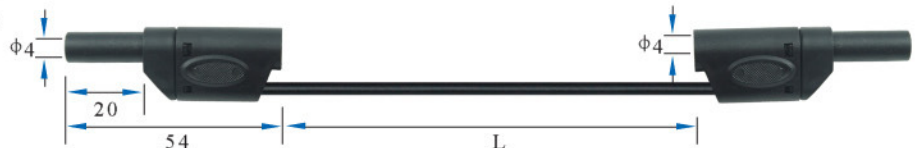

1 2 3 4 5 0

22.420.□*	Rated voltage/current: CATIII 600V-CATII 1000V/19A	1.0mm ² JBF	025	050	100	CE
22.430.□*	Rated voltage/current: CATIII 600V-CATII 1000V/32A	2.5mm ² PVC	025	050	100	CE
22.440.□*	Rated voltage/current: CATIII 600V-CATII 1000V/32A	2.5mm ² SIL	025	050	100	CE

CE

4mm Test Lead

Safety test lead with 4mm stackable plug on both ends. Nickel plated plugs with the shrinkable tube and red cap.




1 2 3 4 5

22.450.□*	Rated voltage/current: CATII 600V/19A	1.0mm ² JBF	025	050	100	CE
22.460.□*	Rated voltage/current: CATII 600V/32A	2.5mm ² PVC	025	050	100	CE
22.470.□*	Rated voltage/current: CATII 600V/32A	2.5mm ² SIL	025	050	100	CE

CE

4mm Test Lead


Test lead with the injected 4mm stackable nickel plated plug on both ends.

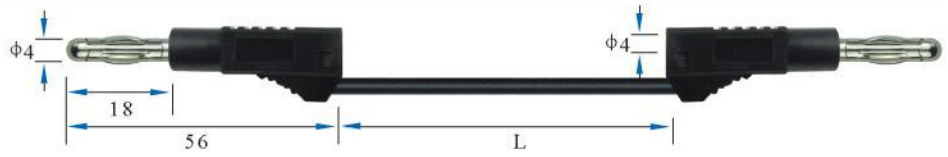

22.480. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	1.0mm ² JBF	025	050	100
22.490. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	2.5mm ² JBF	025	050	100
22.500. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.32A	2.5mm ² SIL	025	050	100

4mm Test Lead


Test lead one end with the 4mm stackable nickel plated plug and the other end with 55mm length nickel plated crocodile clip.

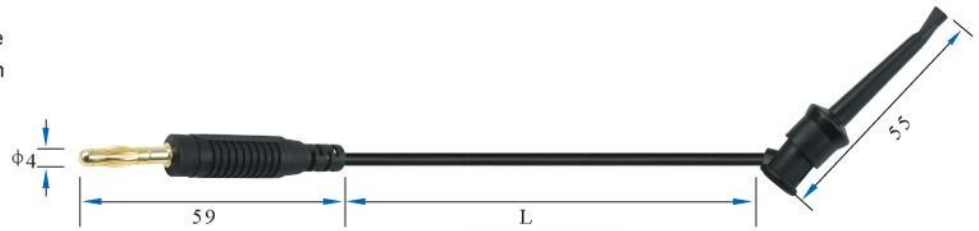

22.510. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	0.75mm ² PVC	025	050	100
22.520. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	0.75mm ² SIL	025	050	100

4mm Test Lead

Test lead one end with the 4mm stackable nickel plated plug and the other end with 55mm length nickel plated crocodile clip.

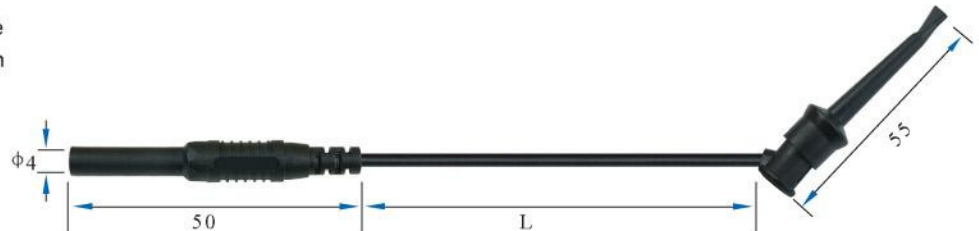

22.530. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	0.75mm ² PVC	025	050	100
22.540. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	0.75mm ² SIL	025	050	100

4mm Test Lead

Safety test lead one end with insulated 4mm straight plug and the other with the Nickel plated plugs with the protective cap.




22.550. <input type="checkbox"/> *	Rated voltage/current: CATIII 1000V/15A	0.75mm ² PVC	025	050	100	CE
22.560. <input type="checkbox"/> *	Rated voltage/current: CATIII 1000V/15A	0.75mm ² SIL	025	050	100	CE



4mm Test Lead

Test lead one end with the 4mm stackable nickel plated plug and the other end with 55mm length nickel plated crocodile clip.

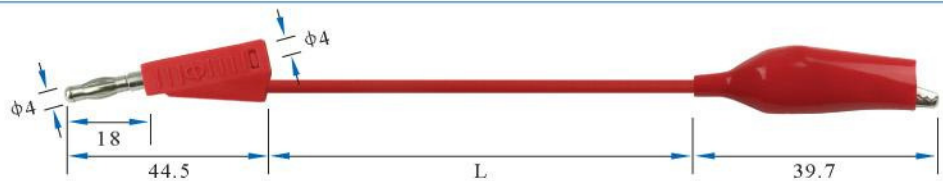

22.570. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	0.75mm ² PVC	025	050	100
22.580. <input type="checkbox"/> *	Rated voltage/current: 30Vac-60Vdc/Max.15A	0.75mm ² SIL	025	050	100