



# Adapter M/F wt.2mm/gn.4mm 26.452.1 czerwony;



## Dane techniczne:

Nazwa: Adapter 26.452.1

Kolor: czerwony

Typ adaptera: (M/F) wtyk bananowy 2mm / gniazdo bananowe 4mm

Napięcie znamionowe: 60V

Prąd znamionowy: 36A

Długość całkowita: 44,5mm

Materiał styku: mosiądz złocony

Materiał izolacji: poliamid


Certyfikaty: RoHS

Producent: Amass

26.450.\*




**Material**  
 Insulator: PA  
 Body: Brass  
 Surface: Nickel plated  
**Rated voltage/current**  
 30Vac-60Vdc/Max.36A



26.454.\*




**Material**  
 Insulator: PA  
 Body: Brass  
 Surface: Nickel plated  
**Rated voltage/current**  
 30Vac-60Vdc/Max.10A



26.451.\*




**Material**  
 Insulator: PA  
 Body: Brass  
 Surface: Nickel plated  
**Rated voltage/current**  
 30Vac-60Vdc/Max.36A

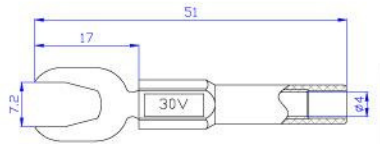

26.455.\*




**Material**  
 Insulator: PA  
 Body: Brass  
 Spring: Beryllium copper  
 Surface: Nickel plated  
**Rated voltage/current**  
 30Vac-60Vdc/Max.10A

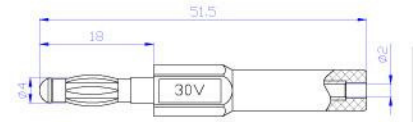

26.452.\*




**Material**  
 Insulator: PA  
 Body: Brass  
 Spring: Beryllium copper  
 Surface: Gold plated  
**Rated voltage/current**  
 30Vac-60Vdc/Max.36A

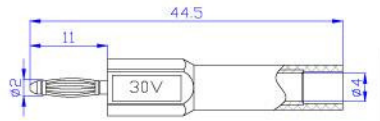

26.456.\*




**Material**  
 Insulator: PA  
 Body: Brass  
 Spring: Beryllium copper  
 Surface: Nickel plated  
**Rated voltage/current**  
 30Vac-60Vdc/Max.10A



26.453.\*




**Material**  
 Insulator: PA  
 Body: Brass  
 Spring: Beryllium copper  
 Surface: Gold plated  
**Rated voltage/current**  
 30Vac-60Vdc/Max.10A

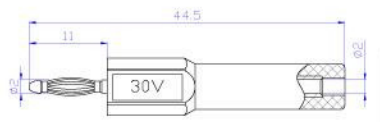

26.457



**Material**  
 Insulator: PA  
 Body: Brass  
 Spring: Beryllium copper  
 Surface: Nickel plated  
**Rated voltage/current**  
 30Vac-60Vdc/Max.10A

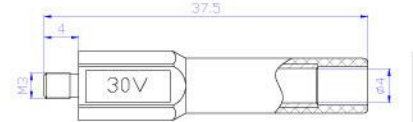

26.458.\*




**Material**

Insulator:PA  
 Body:Brass  
 Spring:Beryllium copper  
 Surface:Nickel plated

**Rated voltage/current**

30Vac-60Vdc/Max.36A

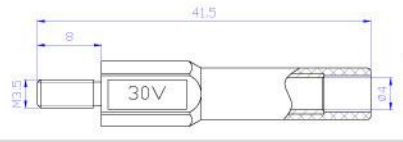

26.459.\*




**Material**

Insulator:PA  
 Body:Brass  
 Spring:Beryllium copper  
 Surface:Nickel plated

**Rated voltage/current**

30Vac-60Vdc/Max.36A

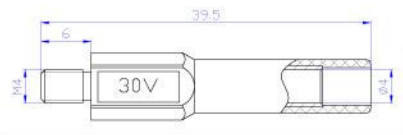

26.470.\*




**Material**


Insulator:PA  
 Body:Brass  
 Surface:Nickel plated

**Rated voltage/current**

30Vac-60Vdc/Max.10A

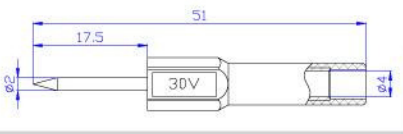

26.480



**Material**

Body:Brass  
 Surface:Gold plated

**Rated voltage/current**

30Vac-60Vdc/Max.32A

26.481

