


2mm Test Lead


Test lead with the 2mm gold plated plug on both ends.



22.030.□*	Rated voltage/current:	30Vac-60Vdc/Max.10A	0.50mm ² PVC	025	050
22.040.□*	Rated voltage/current:	30Vac-60Vdc/Max.10A	0.50mm ² SIL	025	050 100

2mm Test Lead


Test lead with the 2mm stackable gold plated plug on both ends.



22.050.□*	Rated voltage/current:	30Vac-60Vdc/Max.10A	0.50mm ² PVC	025	050 100
22.060.□*	Rated voltage/current:	30Vac-60Vdc/Max.10A	0.50mm ² SIL	025	050 100

4mm Test Lead

Test lead with the 4mm stackable nickel plated plug on both ends.



22.090.□*	Rated voltage/current:	30Vac-60Vdc/Max.15A	0.75mm ² PVC	025	050 100
22.091.□*	Rated voltage/current:	30Vac-60Vdc/Max.15A	0.75mm ² SIL	025	050 100

4mm Test Lead


Test lead with the 4mm stackable nickel plated plug on both ends.



22.100.□*	Rated voltage/current:	30Vac-60Vdc/Max.15A	0.75mm ² PVC	025	050 100
22.111.□*	Rated voltage/current:	30Vac-60Vdc/Max.15A	0.75mm ² SIL	025	050 100
22.110.□*	Rated voltage/current:	30Vac-60Vdc/Max.19A	1.0mm ² JBF	025	050 100

4mm Test Lead


Test lead with the 4mm stackable gold plated plug on both ends.



22.120.□*	Rated voltage/current:	30Vac-60Vdc/Max.15A	0.75mm ² PVC	025	050 100
22.121.□*	Rated voltage/current:	30Vac-60Vdc/Max.19A	1.0mm ² JBF	025	050 100

4mm Test Lead

Test lead with the injected 4mm stackable nickel plated plug on both ends.



22.162.□*	Rated voltage/current:	30Vac-60Vdc/Max.32A	2.5mm ² SIL	025	050 100
22.171.□*	Rated voltage/current:	30Vac-60Vdc/Max.15A	0.75mm ² PVC	025	050 100
22.172.□*	Rated voltage/current:	30Vac-60Vdc/Max.19A	0.75mm ² PVC	025	050 100
22.170.□*	Rated voltage/current:	30Vac-60Vdc/Max.32A	2.5mm ² PVC	025	050 100

4mm Test Lead


Test lead with the 4mm nickel plated plug on both ends.



22.190.□*	Rated voltage/current:	30Vac-60Vdc/Max.15A	0.75mm ² PVC	025	050 100
22.201.□*	Rated voltage/current:	30Vac-60Vdc/Max.15A	0.75mm ² SIL	025	050 100

4mm Safety Test Lead

Safety test lead one end with the insulated 4mm straight plug and the other end with the insulated 4mm angled plug. Nickel plated plugs with the protective cap. Injected type.

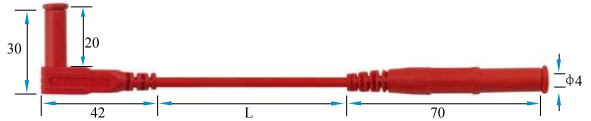


22.210.□*	Rated voltage/current:	CATIII 1000V/15A	0.75mm ² PVC	025	050 100 CE
-----------	------------------------	------------------	-------------------------	-----	------------



4mm Safety Test Lead

Safety test lead with the insulated 4mm angled plug on both ends. Nickel plated plugs with the protective cap. Injected type.



22.241.□*	Rated voltage/current:	CATIII 1000V/15A	0.75mm ² PVC	025	050 100 CE
-----------	------------------------	------------------	-------------------------	-----	------------



4mm Safety Test Lead

Safety test lead with the insulated 4mm stackable plug on both ends. Nickel plated plugs with the red cap.



22.390.□*	Rated voltage/current:	CATIII 600V/19A	1.0mm ² JBF	025	050 100 CE
22.391.□*	Rated voltage/current:	CATIII 600V/32A	2.5mm ² JBF	025	050 100 CE
22.401.□*	Rated voltage/current:	CATIII 600V/32A	2.5mm ² SIL	025	050 100 CE

