STGW40NC60V;ST;TO247;Tranzystor IGBT;N-CHANNEL;50A;600V;260W;

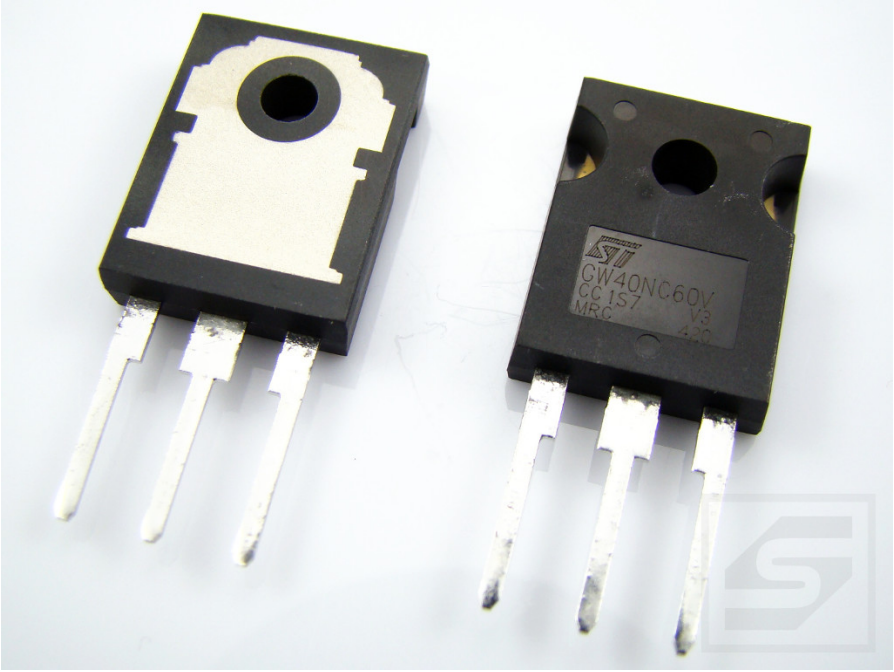

Dane techniczne:
Nazwa: STGW40NC60V
Typ: tranzystor IGBT
Napięcie kolektor-emiter: 600V
Prąd kolektora: 50A
Moc rozpraszana: 260W
Obudowa: TO247
Montaż: THT
Producent: ST

STGW40NC60V

N-CHANNEL 50A - 600V TO-247
Hyper Fast PowerMESH™ IGBT

TYPE	V_{CES}	$V_{CE(sat)}$ (Max)@25°C	I_C @100°C
STGW40NC60V	600 V	< 2.5 V	50 A

- HIGH INPUT IMPEDANCE
- OFF LOSSES INCLUDE TAIL CURRENT
- LOW GATE CHARGE
- HIGH CURRENT CAPABILITY
- VERY HIGH FREQUENCY OPERATION
- CO-PACKAGED WITH TURBOSWITCH ANTIPARALLEL DIODE



TO-247

DESCRIPTION

Using the latest high voltage technology based on a patented strip layout, STMicroelectronics has designed an advanced family of IGBTs, the PowerMESH™ IGBTs, with outstanding performances. The suffix “V” identifies a family optimized for high frequency welding and SMPS applications.

INTERNAL SCHEMATIC DIAGRAM



APPLICATIONS

- HIGH FREQUENCY INVERTERS
- SMPS and PFC IN BOTH HARD SWITCH AND RESONANT TOPOLOGIES
- UPS
- WELDING

ORDERING INFORMATION

SALES TYPE	MARKING	PACKAGE	PACKAGING
STGW40NC60V	GW40NC60V	TO-247	TUBE

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CES}	Collector-Emitter Voltage (V_{GS} = 0)	600	V
V_{ECR}	Emitter-Collector Voltage	20	V
V_{GE}	Gate-Emitter Voltage	± 20	V
I_C	Collector Current (continuous) at T_C = 25°C	80	A
I_C	Collector Current (continuous) at T_C = 100°C	50	A
I_{CM} (•)	Collector Current (pulsed)	220	A
P_{TOT}	Total Dissipation at T_C = 25°C	260	W
	Derating Factor	2.6	W/°C
T_{stg}	Storage Temperature	– 55 to 125	°C
T_j	Max. Operating Junction Temperature	125	°C

(•)Pulse width limited by safe operating area

THERMAL DATA

Rthj-case	Thermal Resistance Junction-case Max	0.385	°C/W
Rthj-amb	Thermal Resistance Junction-ambient Max	30	°C/W

ELECTRICAL CHARACTERISTICS (T_{CASE} = 25 °C UNLESS OTHERWISE SPECIFIED)

OFF

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_{BR(CES)}$	Collector-Emitter Breakdown Voltage	I_C = 1 mA, V_{GE} = 0	600			V
I_{CES}	Collector cut-off (V_{GE} = 0)	V_{CE} = Max Rating, T_C = 25 °C V_{CE} = Max Rating, T_C = 125 °C			250 1000	µA µA
I_{GES}	Gate-Emitter Leakage Current (V_{CE} = 0)	V_{GE} = ±20 V , V_{CE} = 0			±250	nA

ON (1)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_{GE(th)}$	Gate Threshold Voltage	V_{CE} = V_{GE}, I_C = 250 µA	3	4	5	V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	V_{GE} = 15 V, I_C = 40 A, Tj =25°C V_{GE} =15 V, I_C = 40 A, Tj =125°C		1.92 1.7	2.5	V V

ELECTRICAL CHARACTERISTICS (CONTINUED)

DYNAMIC

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
g_{fs}	Forward Transconductance	V_{CE} = 25 V , I_C = 20 A		20		S
C_{ies} C_{oes} C_{res}	Input Capacitance Output Capacitance Reverse Transfer Capacitance	V_{CE} = 25 V, f= 1 MHz, V_{GE} = 0		4550 350 105		pF pF pF
Q_g Q_{ge} Q_{gc}	Total Gate Charge Gate-Emitter Charge Gate-Collector Charge	V_{CE} = 480 V, I_C = 40 A, V_{GE} = 15 V		220 30 105		nC nC nC
I_{CL}	Latching Current	V_{clamp} = 480 V , Tj = 125°C R_G = 10 Ω	220			A

SWITCHING ON

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$ t_r	Turn-on Delay Time Rise Time	V_{CC} = 480 V, I_C = 40 A R_G = 10Ω , V_{GE} = 15 V		45 27		ns ns
$(di/dt)_{on}$ Eon	Turn-on Current Slope Turn-on Switching Losses	V_{CC}= 480 V, I_C = 40 A R_G= 10 Ω, V_{GE} = 15 V, Tj =125°C		1150 800		A/µs µJ

SWITCHING OFF

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$t_r(V_{off})$ $t_{d(off)}$ t_f E_{off}(**) E_{ts}	Off Voltage Rise Time Delay Time Fall Time Turn-off Switching Loss Total Switching Loss	V_{cc} = 480 V, I_C = 40 A, R_{GE} = 10 Ω , V_{GE} = 15 V T_J = 25 °C		37 270 70 1120 1880		ns ns ns µJ µJ
$t_r(V_{off})$ $t_{d(off)}$ t_f E_{off}(**) E_{ts}	Off Voltage Rise Time Delay Time Fall Time Turn-off Switching Loss Total Switching Loss	V_{cc} = 480 V, I_C = 40 A, R_{GE} = 10 Ω , V_{GE} = 15 V Tj = 125 °C		67 325 120 1600 2400		ns ns ns µJ µJ

Note: 1. Pulsed: Pulse duration = 300 µs, duty cycle 1.5 %.
2. Pulse width limited by max. junction temperature.
(**)Losses include Also the Tail (Jedec Standardization)

Output Characteristics

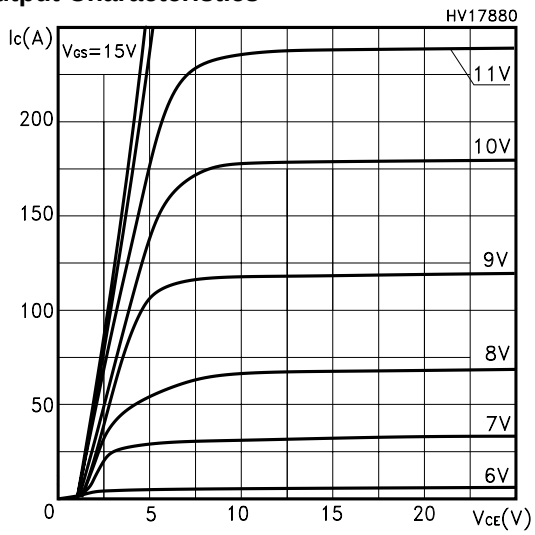

Transfer Characteristics

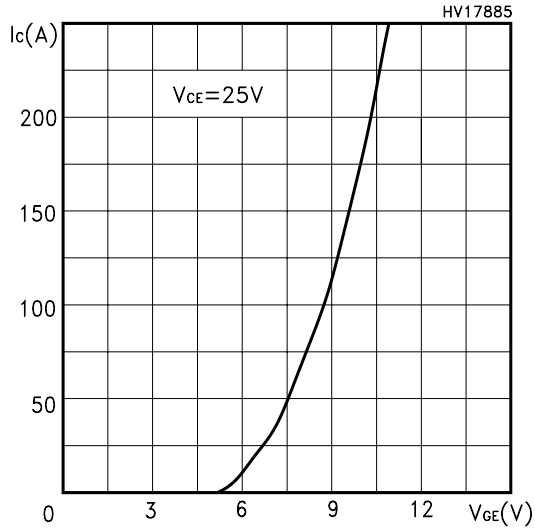

Transconductance

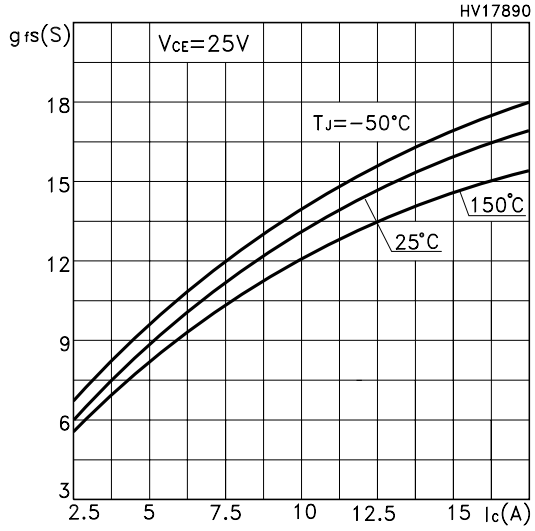

Normalized Collector-Emitter On Voltage vs Temp.

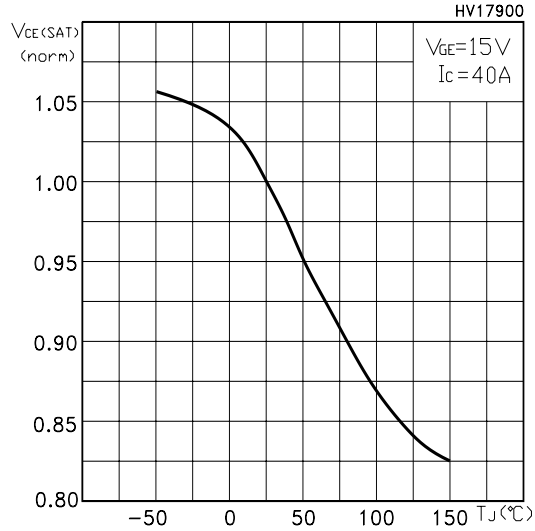

Collector-Emitter On Voltage vs Collector Current

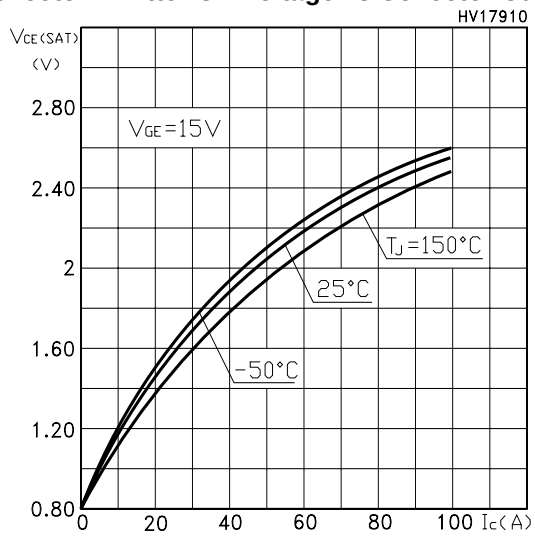

Gate Threshold vs Temperature

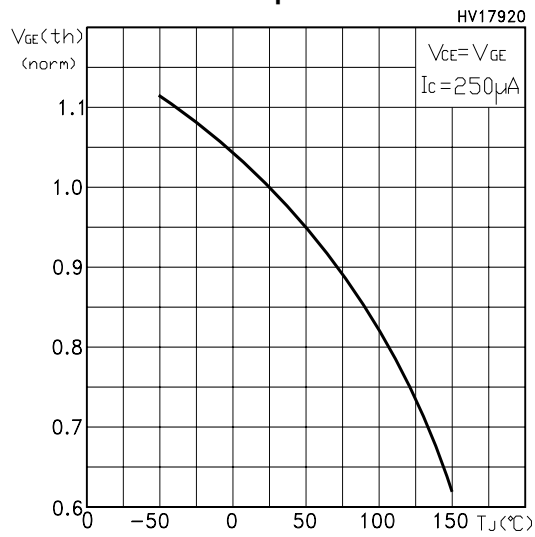

Normalized Breakdown Voltage vs Temperature

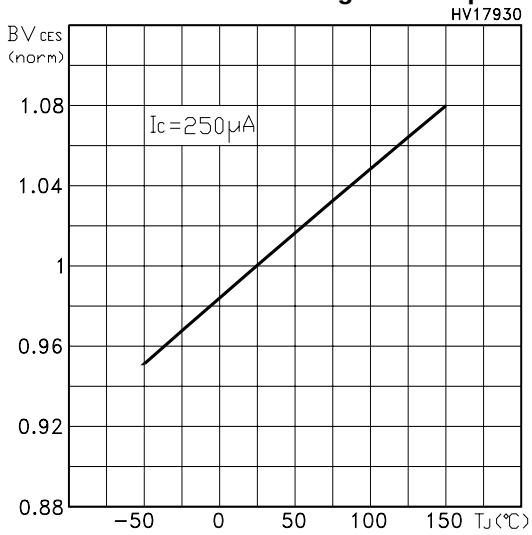

Capacitance Variations

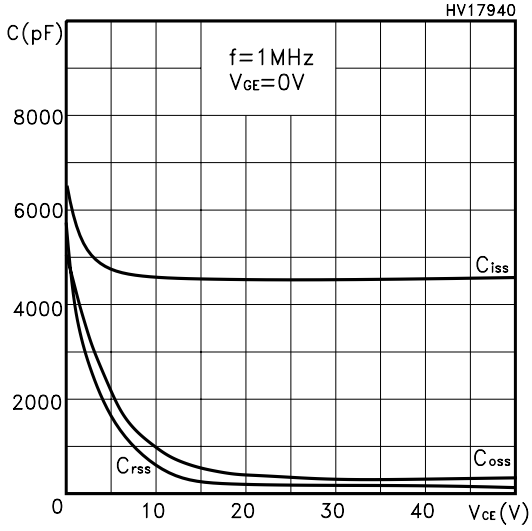

Gate Charge vs Gate-Emitter Voltage

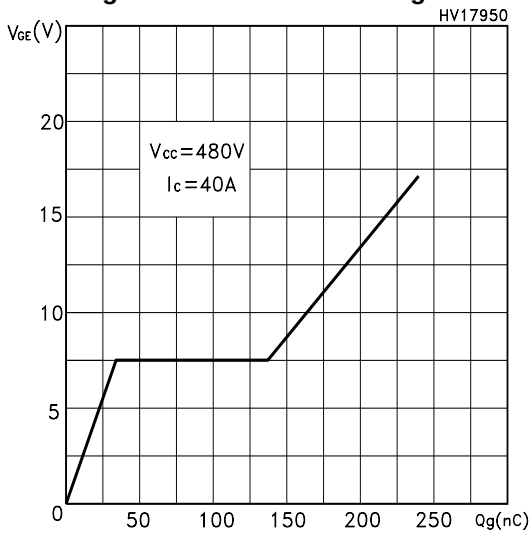

Total Switching Losses vs Gate Resistance

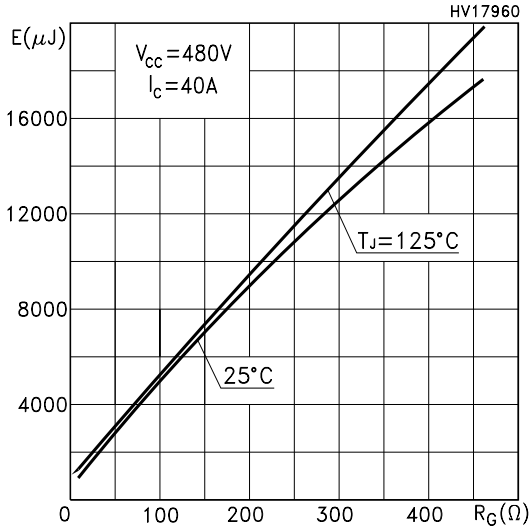

Total Switching Losses vs Temperature

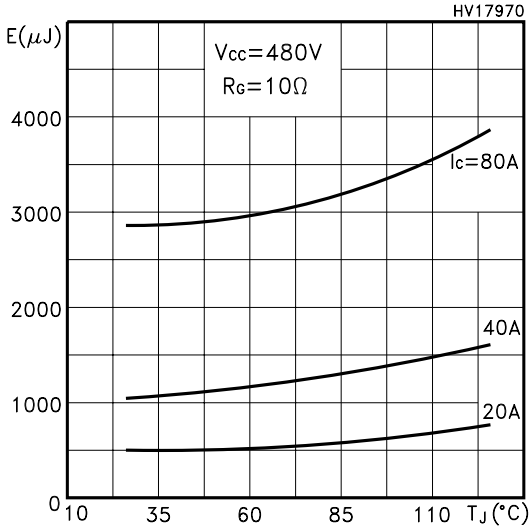

Total Switching Losses vs Collector Current

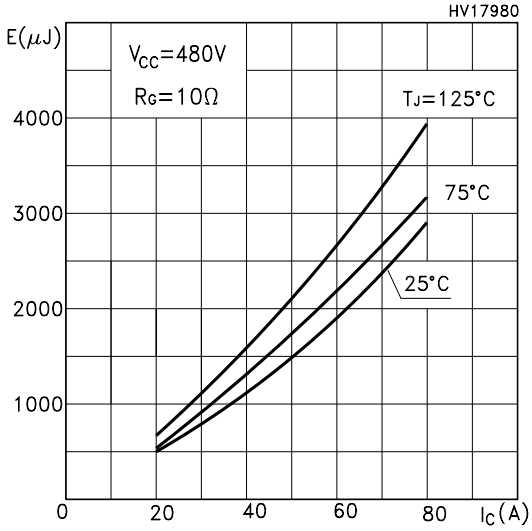

Thermal Impedance for Max247

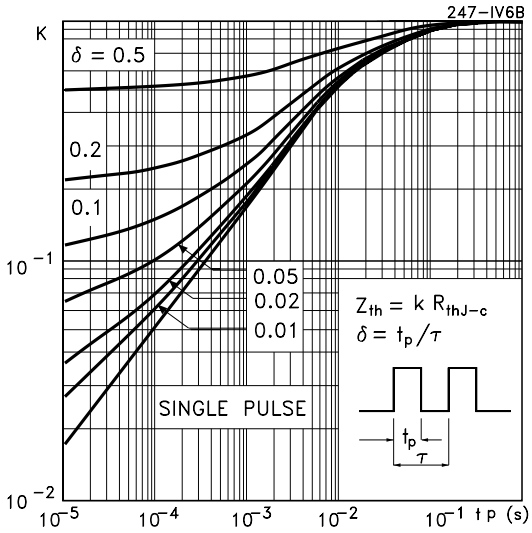

Turn-Off SOA

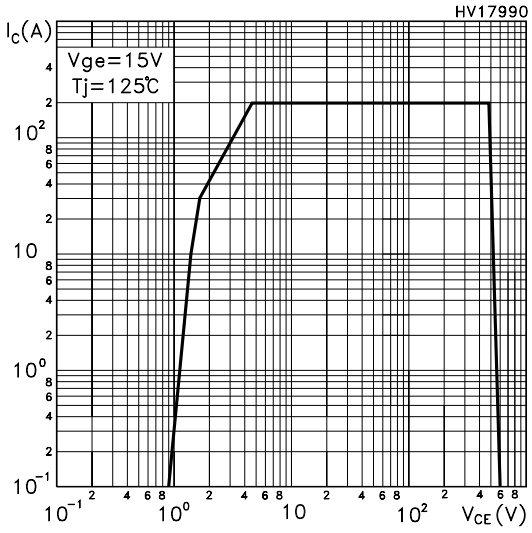

Fig. 1: Gate Charge test Circuit

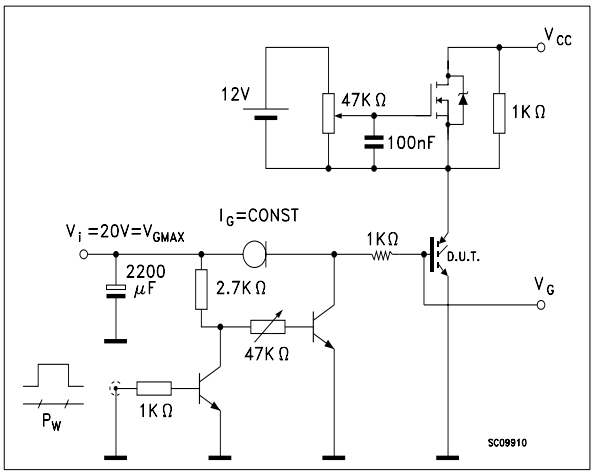

Fig. 2: Test Circuit For Inductive Load Switching

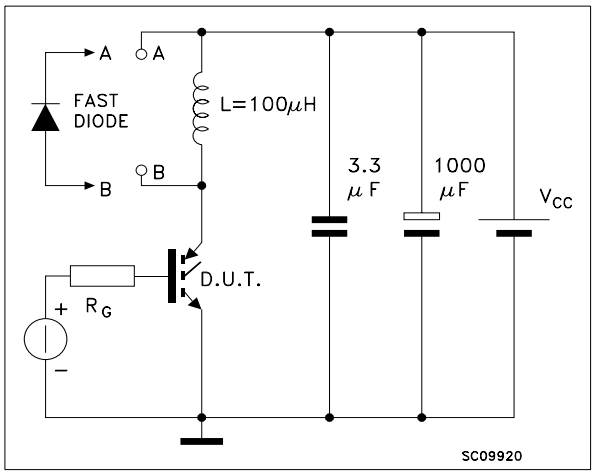

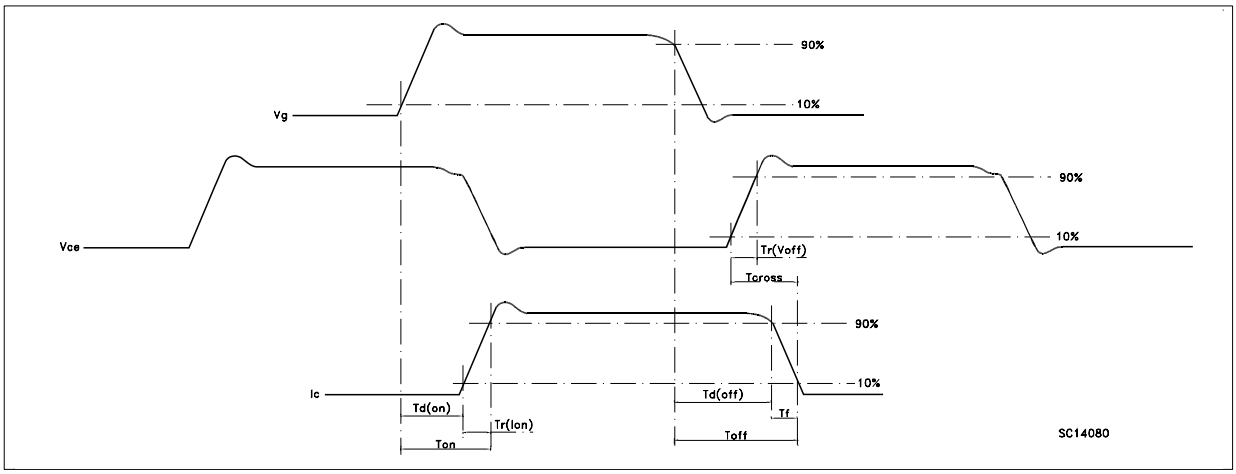

TO-247 MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A	4.85		5.15	0.19		0.20
A1	2.20		2.60	0.086		0.102
b	1.0		1.40	0.039		0.055
b1	2.0		2.40	0.079		0.094
b2	3.0		3.40	0.118		0.134
c	0.40		0.80	0.015		0.03
D	19.85		20.15	0.781		0.793
E	15.45		15.75	0.608		0.620
e		5.45			0.214	
L	14.20		14.80	0.560		0.582
L1	3.70		4.30	0.14		0.17
L2		18.50			0.728	
øP	3.55		3.65	0.140		0.143
øR	4.50		5.50	0.177		0.216
S		5.50			0.216	

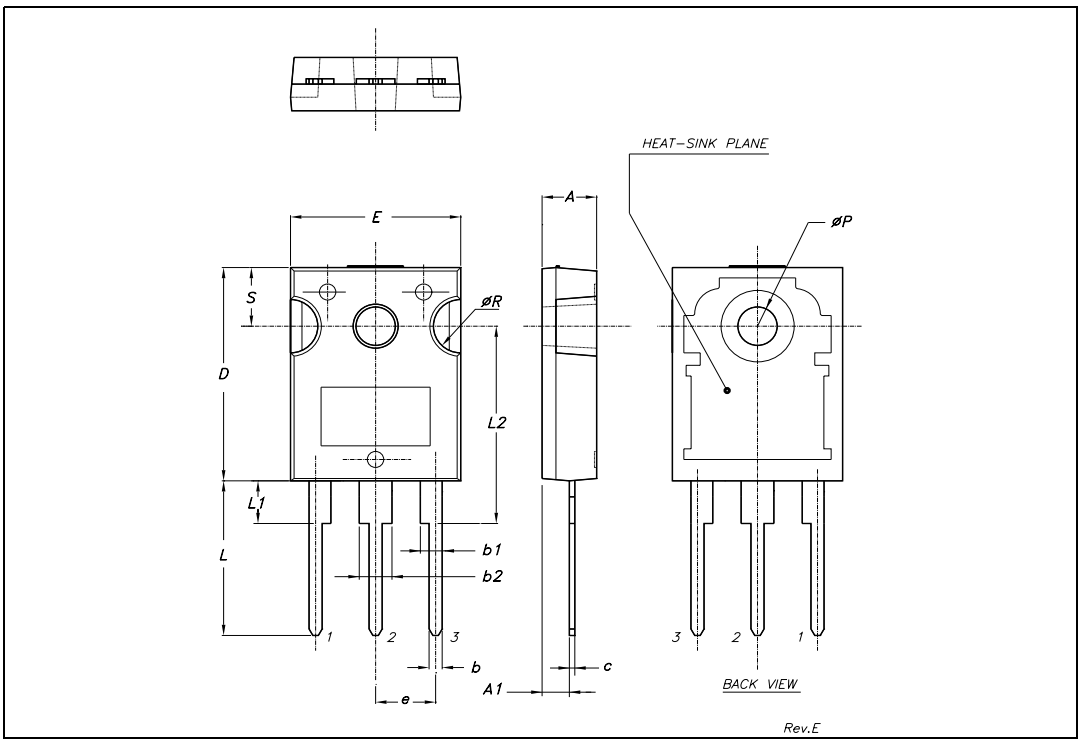

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2003 STMicroelectronics - Printed in Italy - All Rights Reserved
STMicroelectronics GROUP OF COMPANIES
Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco
Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.
© http://www.st.com