


### 20.132.\*

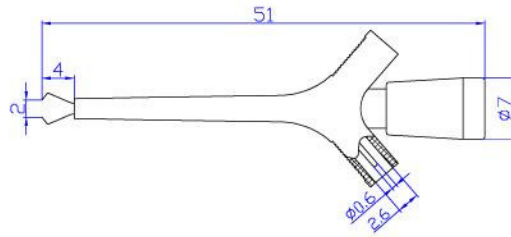

**Feature**


Mini test clip with pin connection. Specially for the thin wires and small terminals.

**Material**

Insulator: PA  
Body: Brass  
Surface: Gold plated

**Rated voltage/current:**  
30Vac-60Vdc/Max.2A

### 20.135.\*

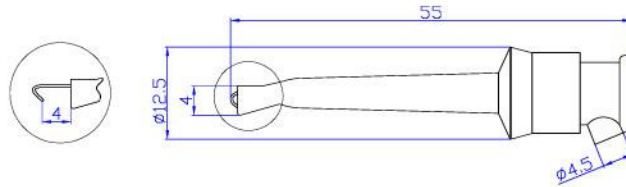

**Feature**


Mini test clip with solder connection. Press with the good feeling and contact hook for wires up easily.

**Material**

Insulator: PA  
Body: Brass

**Rated voltage/current:**  
30Vac-60Vdc/Max.10A

### 20.155.\*



**Feature**

Safety test probe with 4mm socket connection. Sharp stainless steel needle.


**Material**

Insulator: PA  
Body: Stainless steel & Brass

**Rated voltage/current:**  
CATII 600V/Max.1A



### 20.156.\*

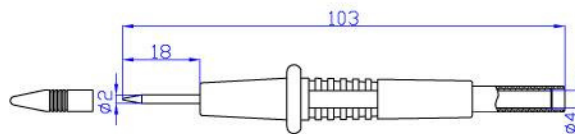

**Feature**

Safety test probe with 4mm socket connection. Sharp stainless steel tip with the perfectly protective cap.


**Material**

Insulator: PA  
Body: Stainless steel

**Rated voltage/current:**  
CATII 1000V/Max.10A



20.157.\*

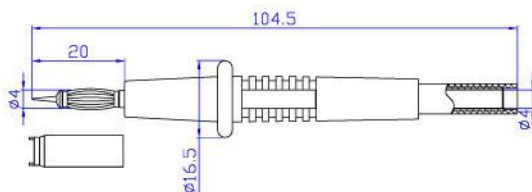

### Feature

Safety test probe with 4mm socket connection. Spring-loaded tip with the protective cap.

### Material


Insulator:PA  
Body:Brass  
Spring:Beryllium copper  
Surface:Nickel plated

### Rated voltage/current:

CATII 1000V/Max.32A



20.161.\*

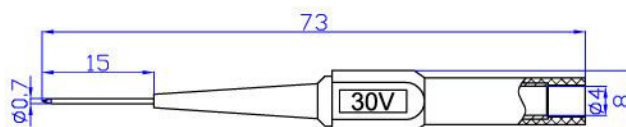

### Feature

Safety test probe with 4mm socket connection. Sharp stainless steel needle.


### Material

Insulator:PA  
Body:Stainless steel & Brass

### Rated voltage/current:

30Vac-60Vdc/Max.1A

20.162.\*

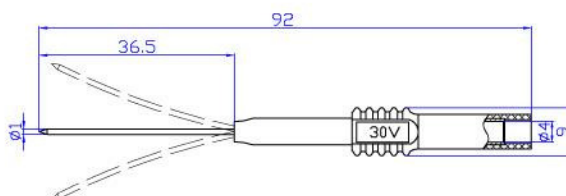

### Feature

Safety test clip with 4mm socket connection. Long sharp stainless steel tip and flexible spring with the silicone tube can meet kinds of your request.

### Material


Insulator:PA  
Body:Stainless steel & Brass

### Rated voltage/current:

30Vac-60Vdc/Max.10A



20.163.\*

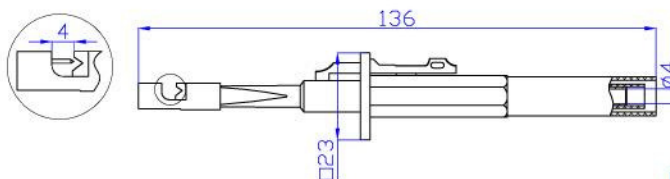

### Feature

Safety test probe with 4mm socket connection. Stainless steel tip can connect with the wire without cutting it.

### Material


Insulator:PA  
Body:Stainless steel & Brass

### Rated voltage/current:

CATIII 1000V/Max.10A



### 20.164.\*




#### Feature

Safety test probe with 4mm socket connection. Sharp stainless steel tip with the protective cap.

#### Material

Insulator: PA  
Body: Stainless steel & Brass  
**Rated voltage/current:**  
CATIII 1000V/Max.10A

### 20.168.\*

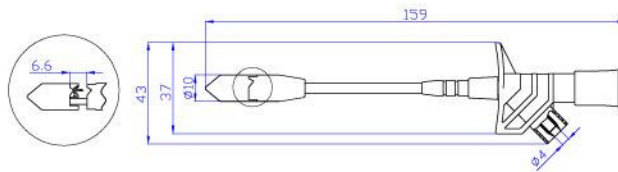


#### Feature

Safety test probe with 4mm socket connection. Stainless steel tip can connect with the wire without cutting it.

#### Material

Insulator: PA  
Body: Brass & Stainless steel  
Surface: Nickel plated  
**Rated voltage/current:**  
CATIII 1000V/Max.10A

### 20.169.\*

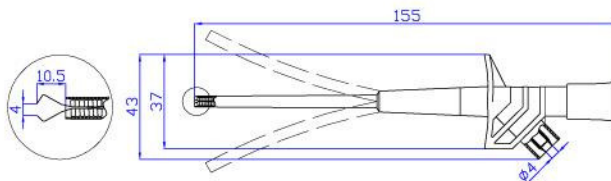


#### Feature

Safety test clip with 4mm socket connection. Flexible spring with the tube can contact the wires and terminals even at the corner.

#### Material

Insulator: PA  
Body: Brass & Stainless steel  
**Rated voltage/current:**  
CATIII 1000V/Max.10A

### 20.211.\*

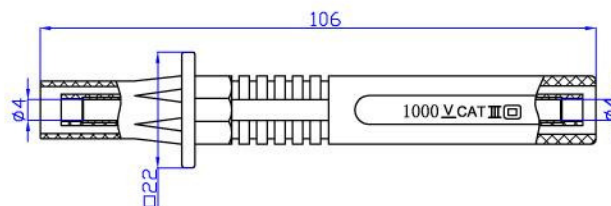

#### Feature

Safety test probe with 4mm socket connection on both end. Fuse inside.


#### Material

Insulator: PA  
Body: Brass  
**Rated voltage/current:**  
CATIII 1000V/Max.20A

20.212.\*



090.0058

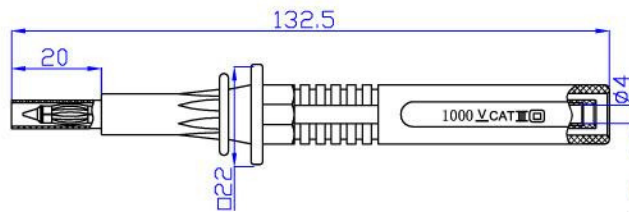

CE

**Material**

Insulator:PA

Body:Brass

**Rated voltage/current:**


CATIII 1000V/Max.20A

**Feature**

Safety test probe with 4mm socket connection. Spring loaded side with the shrinkable tube.Fuse inside.



20.170.\*

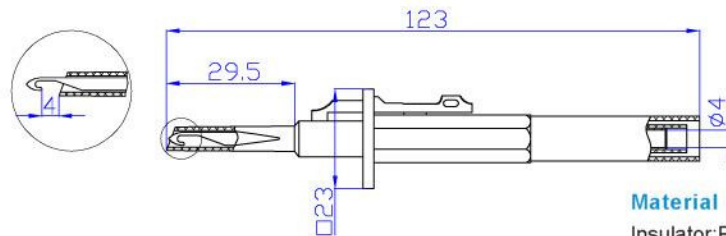

CE

**Material**

Insulator:PA

Body:Brass & Stainless steel


**Rated voltage/current:**

CATIII 1000V/Max.10A

**Feature**

Safety test clip with 4mm socket connection. The clip can connect the terminals easily.

20.601.\*

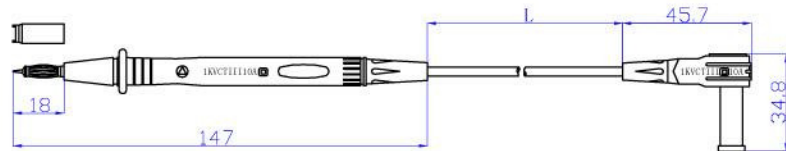


CE

**Feature**

Safety test lead one end with the insulated 4mm spring loaded test probe and the other end with the insulated 4mm angled plug.Nickel plated plugs with the protective cap. Red+Black as a set.

**Rated voltage/current:** CATIII 1000V/10A **0.75mm<sup>2</sup>** **PVC** **100**

20.602.\*

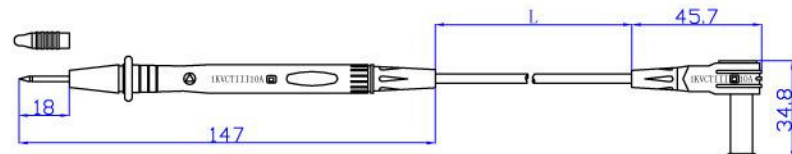

CE

**Feature**

Safety test lead one end with the insulated test probe and the other end with the insulated 4mm angled plug.Nickel plated plugs with the protective cap. Red+Black as a set.

**Rated voltage/current:** CATIII 1000V/10A **0.75mm<sup>2</sup>** **PVC** **100**