




Przełącznik HFS2-A214DN DIP6 Input 3V 5-20mA Output 150mA 400V

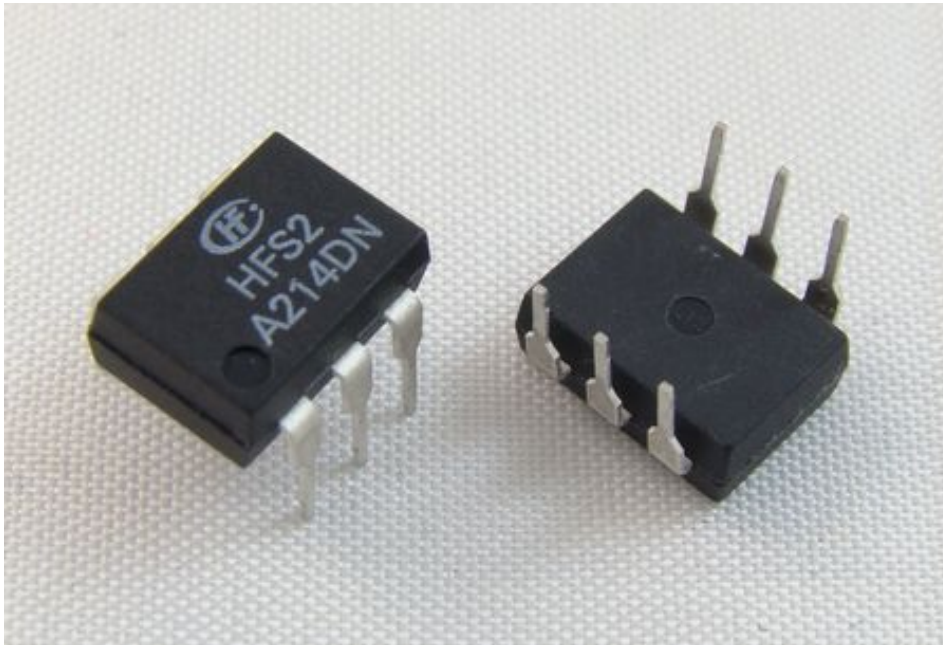

Dane techniczne:

Nazwa: HFS2-A214DN

Wersja przełącznika SSR: stałoprądowy

Napięcie sterujące: 3V

Rodzaj napięcia sterującego: DC

Maksymalny prąd przełączania SSR: 0,15A

Zakres napięcia przełączania SSR: 400V

Rodzaj napięcia przełączania SSR: DC

Wejście: 3V/5-20mA

Wyjście: 400V/150mA DC

Wymiary : 10,3 x 6,4 x 4,1 mm

Sposób przełączania SSR: nie dotyczy

Rodzaj wyjścia SSR: MOSFET

Sposób montażu: do druku (PCB)

Producent: Hongfa



Features

- Photo isolation
- 2500V Dielectric strength
- Insulation resistance:1000MΩ
- Printed circuit board mount
- Environmental friendly product (RoHS compliant)

INPUT (TA = 25°C)

Control current range	5mA to 20mA
Max. reverse protection voltage	3V
Must release current	0.2mA
Must operate current	5mA

DESCRIPTION

HFS2 solid state relay comes in a super-miniature package measuring (L)10.3mm x (W)6.4mm x (H)3.5mm. Low on resistance(Max.50Ω) and low-level off state leakage current.

OUTPUT (TA = 25°C)

Load current range	150mA	
Max. surge current (10ms)	0.3Apk	
Max. turn-on time	0.5ms	
Max. turn-off time	0.3ms	
Max. leakage current	1μA	
On resistance	A mode ¹⁾	50Ω
	B mode ¹⁾	25Ω
	C mode ¹⁾	12.5Ω

APPLICATIONS

- Telecommunications
- Automatic meter reading
- High speed inspection machines
- Factory automation equipment

GENERAL (TA = 25°C)

Dielectric strength (input to output)	2500VAC, 50Hz/60Hz, 1min
Insulation resistance	1000MΩ (at 500VDC)
Max. capacitance (input to output)	1.5pF
Vibration resistance	10 to 55 Hz 3mm DA
Shock resistance	500g
Operating temperature	-20°C to 80°C
Storage temperature	-40°C to 100°C
Ambient humidity	45% to 85% RH
Unit weight	Approx. 0.6g

Notes: (1) To see terminal wiring diagram.



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2008 Rev. 1.01




ORDERING INFORMATION

Type	HFS2 /		2	A	2	1	4	D	(XXX)
Output	2: Dual	Nil: Single							
Output mode	A: Normal open (NO)								
Pins	1: 4 Pins	2: 6 Pins	3: 8 Pins						
Level	1: Economy								
Load voltage	0: 60V	1: 100V	2: 200V	3: 350V	4: 400V				
Mount mode	D: DIP	S: SMD	P: SOP						
Customer special code									


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

Outline Dimensions

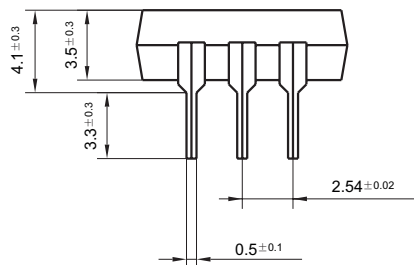


Schematics




WIRING DIAGRAM


Wiring Diagram

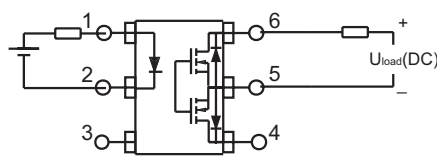


B Mode Wiring Diagram

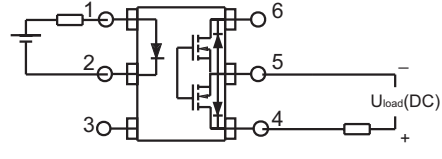

B Mode Wiring Diagram

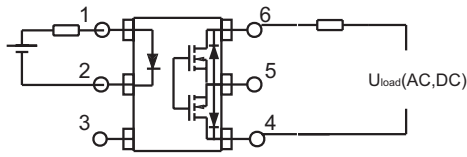

A Mode Wiring Diagram

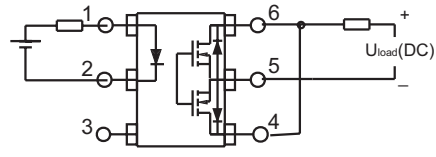


C Mode Wiring Diagram

CHARACTERISTIC CURVES


Wiring diagram A mode:

Max. Load Current vs. Ambient Temperature

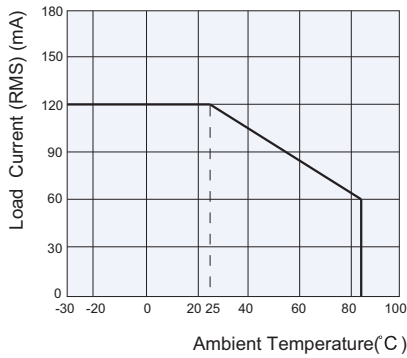


Wiring diagram B mode:

Max. Load Current vs. Ambient Temperature

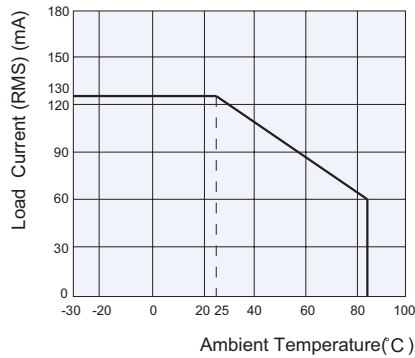

Wiring diagram C mode:

Max. Load Current vs. Ambient Temperature

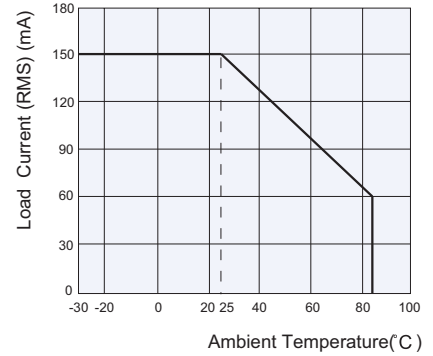

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.