




ROBERT STĘPIEŃ
HURTOWNIA CZĘŚCI ELEKTRONICZNYCH
podzespoly-elektroniczne.pl

Kondensator elektrolityczny 8200uF/16V; (M); 105C;18x40mm;SXE;NIPPON;(32)

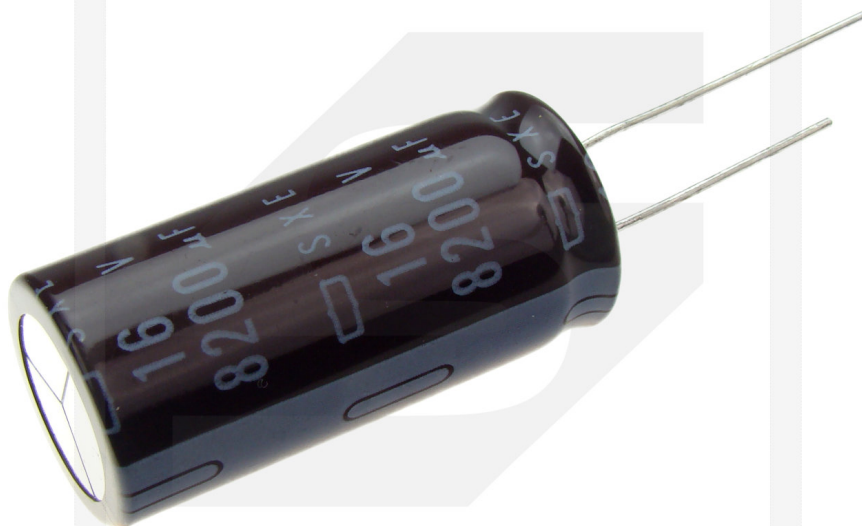

Dane techniczne:

Pojemność: 8200uF

Napięcie: 16V

Maksymalna temperatura robocza: 105C

Wymiary: 18x40mm

www.podzespoly-elektroniczne.pl

Robert Stępień Hurtownia Części Elektronicznych; Adres: ul. Wolumen 2, pawilon 71; 01-912 Warszawa; tel.: 601 296 402 /
sklep@podzespoly-elektroniczne.pl

SXE Series

- Low impedance capacitors, operating temperature range from -55 to 105°C
- Solvent-proof type
- Pb-free design





◆SPECIFICATIONS

Items	Characteristics										
Category Temperature Range	-55 to +105°C										
Rated Voltage Range	6.3 to 100V _{dc}										
Capacitance Tolerance	±20%(M) (at 20°C, 120Hz)										
Leakage Current	I=0.03CV (after 1 minute at 20°C) Where: I:Max. leakage current (μA), C:Nominal capacitance (μF), V:Rated voltage (V) I=0.01CV (after 2 minutes at 20°C)										
Dissipation factor (tanδ)	Rated voltage(V _{dc})	6.3	10	16	25	35	50	63	80	100	
	tanδ (Max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.08	0.08	0.07	
	When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20°C, 120Hz)										
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for the specified period of lifetime at 105°C.										
	Lifetime	1,000 hours (φ4 to 8)					2,000 hours (φ10 to 18)				
	Capacitance change	≤±20% of the initial value					≤±20% of the initial value				
	D.F. (tanδ)	≤200% of the initial specified value					≤200% of the initial specified value				
	Leakage current	≤the initial specified value					≤the initial specified value				
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.										
	Capacitance change	≤±20% of the initial value									
	D.F. (tanδ)	≤150% of the initial specified value									
	Leakage current	≤the initial specified value									

◆DIMENSIONS [mm]


- Terminal Code : E

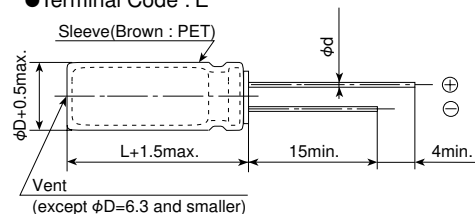

φD	4	5	6.3	8	10 & 12.5	16 & 18
φd	0.45	0.5*	0.5*	0.6	0.6	0.8
F	1.5	2.0	2.5	3.5	5.0	7.5

*For L=7mm, φd is 0.45

◆PART NUMBERING SYSTEM

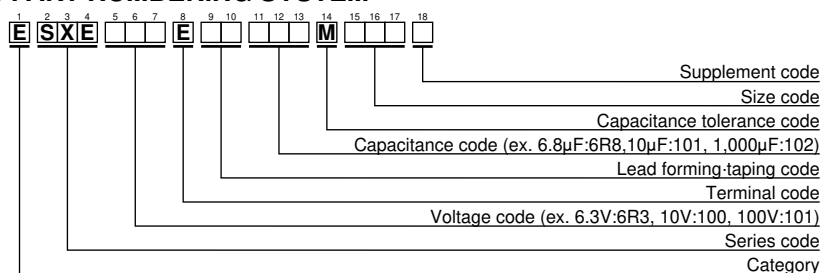

Specifications in this bulletin are subject to change without notice.

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L (mm)	Impedance (Qmax/ 100kHz)		Rated ripple current (mAmps/105°C)		Part No.
			20°C	-10°C	100kHz	120Hz	
6.3	27	4x7	5.5	14.3	50	25	ESXE6R3E□□270MD07D
	56	5x7	3.4	8.8	75	68	ESXE6R3E□□560ME07D
	68	4x11.5	2.2	5.7	102	74	ESXE6R3E□□680MDB5D
	120	5x11.5	1.3	3.4	154	108	ESXE6R3E□□121MEB5D
	120	6.3x7	1.4	3.6	140	98	ESXE6R3E□□121MF07D
	150	5x15	0.92	2.4	210	147	ESXE6R3E□□151ME15D
	220	6.3x11.5	0.61	1.6	260	182	ESXE6R3E□□221MFB5D
	330	6.3x15	0.40	1.0	350	245	ESXE6R3E□□331MF15D
	390	8x12	0.34	0.88	400	320	ESXE6R3E□□391MH12D
	470	10x12.5	0.28	0.73	510	410	ESXE6R3E□□471MJC5S
	560	8x15	0.24	0.62	500	400	ESXE6R3E□□561MH15D
	680	10x15	0.22	0.57	635	510	ESXE6R3E□□681MJ15S
	820	8x20	0.19	0.49	650	520	ESXE6R3E□□821MH20D
	1,200	10x20	0.14	0.36	860	775	ESXE6R3E□□122MJ20S
	1,200	12.5x15	0.12	0.31	970	875	ESXE6R3E□□122MK15S
	1,500	10x25	0.12	0.31	1,030	930	ESXE6R3E□□152MJ25S
	2,200	10x30	0.095	0.25	1,150	1,035	ESXE6R3E□□222MJ30S
	2,200	12.5x20	0.089	0.23	1,120	1,010	ESXE6R3E□□222MK20S
	2,200	16x15	0.10	0.26	1,100	990	ESXE6R3E□□222ML15S
	2,700	12.5x25	0.075	0.20	1,320	1,190	ESXE6R3E□□272MK25S
	3,300	18x15	0.081	0.21	1,280	1,155	ESXE6R3E□□332MM15S
	3,900	12.5x30	0.065	0.17	1,540	1,390	ESXE6R3E□□392MK30S
	3,900	16x20	0.076	0.20	1,370	1,235	ESXE6R3E□□392ML20S
	4,700	12.5x35	0.053	0.14	1,770	1,595	ESXE6R3E□□472MK35S
	5,600	12.5x40	0.046	0.12	1,980	1,785	ESXE6R3E□□562MK40S
	5,600	16x25	0.066	0.17	1,570	1,415	ESXE6R3E□□562ML25S
	5,600	18x20	0.063	0.16	1,580	1,425	ESXE6R3E□□562MM20S
	6,800	16x30	0.055	0.14	1,810	1,630	ESXE6R3E□□682ML30S
	6,800	18x25	0.054	0.14	1,830	1,650	ESXE6R3E□□682MM25S
	8,200	16x35	0.047	0.12	2,030	1,830	ESXE6R3E□□822ML35S
	10,000	16x40	0.039	0.10	2,320	2,090	ESXE6R3E□□103ML40S
	10,000	18x30	0.047	0.12	2,030	1,830	ESXE6R3E□□103MM30S
	12,000	18x35	0.042	0.11	2,240	2,020	ESXE6R3E□□123MM35S
	15,000	18x40	0.037	0.096	2,460	2,215	ESXE6R3E□□153MM40S
10	22	4x7	5.4	14.0	50	25	ESXE100E□□220MD07D
	39	5x7	3.3	8.6	75	68	ESXE100E□□390ME07D
	47	4x11.5	2.2	5.6	102	74	ESXE100E□□470MDB5D
	82	5x11.5	1.3	3.4	154	108	ESXE100E□□820MEB5D
	82	6.3x7	1.4	3.6	140	98	ESXE100E□□820MF07D
	120	5x15	0.91	2.4	210	147	ESXE100E□□121ME15D
	180	6.3x11.5	0.59	1.5	260	182	ESXE100E□□181MFB5D
	270	6.3x15	0.39	1.0	350	245	ESXE100E□□271MF15D
	330	8x12	0.33	0.86	400	280	ESXE100E□□331MH12D
	390	10x12.5	0.27	0.70	510	410	ESXE100E□□391MJC5S
	470	8x15	0.24	0.62	500	400	ESXE100E□□471MH15D
	560	8x20	0.18	0.47	650	520	ESXE100E□□561MH20D
	560	10x15	0.22	0.57	635	510	ESXE100E□□561MJ15S
	820	10x20	0.14	0.36	860	690	ESXE100E□□821MJ20S
	1,000	12.5x15	0.12	0.31	970	780	ESXE100E□□102MK15S
	1,200	10x25	0.12	0.31	1,030	930	ESXE100E□□122MJ25S
	1,500	10x30	0.093	0.24	1,150	1,035	ESXE100E□□152MJ30S
	1,500	16x15	0.10	0.26	1,100	990	ESXE100E□□152ML15S
	1,800	12.5x20	0.087	0.23	1,120	1,010	ESXE100E□□182MK20S
	2,200	12.5x25	0.073	0.19	1,320	1,190	ESXE100E□□222MK25S
	2,200	18x15	0.080	0.21	1,280	1,155	ESXE100E□□222MM15S
	2,700	12.5x30	0.064	0.17	1,540	1,390	ESXE100E□□272MK30S
	3,300	12.5x35	0.052	0.14	1,770	1,595	ESXE100E□□332MK35S
	3,300	16x20	0.075	0.20	1,370	1,235	ESXE100E□□332ML20S
	3,900	12.5x40	0.045	0.12	1,980	1,785	ESXE100E□□392MK40S
	3,900	16x25	0.065	0.17	1,570	1,415	ESXE100E□□392ML25S
	3,900	18x20	0.062	0.16	1,580	1,425	ESXE100E□□392MM20S
	4,700	16x30	0.054	0.14	1,810	1,630	ESXE100E□□472ML30S
	4,700	18x25	0.053	0.14	1,830	1,650	ESXE100E□□472MM25S
	6,800	16x35	0.046	0.12	2,030	1,830	ESXE100E□□682ML35S
	6,800	18x30	0.046	0.12	2,030	1,830	ESXE100E□□682MM30S
	8,200	16x40	0.038	0.099	2,320	2,090	ESXE100E□□822ML40S
	8,200	18x35	0.041	0.11	2,240	2,020	ESXE100E□□822MM35S
10	10,000	18x40	0.037	0.096	2,460	2,215	ESXE100E□□103MM40S
	15	4x7	5.3	13.8	50	25	ESXE160E□□150MD07D
	27	5x7	3.3	8.6	75	49	ESXE160E□□270ME07D
	33	4x11.5	2.1	5.5	102	51	ESXE160E□□330MDB5D
	56	5x11.5	1.3	3.4	154	108	ESXE160E□□560MEB5D
	56	6.3x7	1.4	3.6	140	98	ESXE160E□□560MF07D
	82	5x15	0.89	2.3	210	147	ESXE160E□□820ME15D
	120	6.3x11.5	0.58	1.5	260	182	ESXE160E□□121MFB5D
	180	6.3x15	0.38	0.99	350	245	ESXE160E□□181MF15D
	220	8x12	0.33	0.86	400	280	ESXE160E□□221MH12D
	270	10x12.5	0.27	0.70	510	360	ESXE160E□□271MJC5S
	330	8x15	0.23	0.60	500	350	ESXE160E□□331MH15D
	390	10x15	0.21	0.55	635	510	ESXE160E□□391MJ15S
	470	8x20	0.18	0.47	650	520	ESXE160E□□471MH20D
	680	10x20	0.14	0.36	860	690	ESXE160E□□681MJ20S
	680	12.5x15	0.12	0.31	970	780	ESXE160E□□681MK15S
	820	10x25	0.12	0.31	1,030	825	ESXE160E□□821MJ25S
	1,000	10x30	0.091	0.24	1,150	920	ESXE160E□□102MJ30S
	1,200	12.5x20	0.086	0.22	1,120	1,010	ESXE160E□□122MK20S
	1,200	16x15	0.099	0.26	1,100	990	ESXE160E□□122ML15S
	1,500	12.5x25	0.072	0.19	1,320	1,190	ESXE160E□□152MK25S
	1,500	18x15	0.078	0.20	1,280	1,155	ESXE160E□□152MM15S
	2,200	12.5x30	0.063	0.16	1,540	1,390	ESXE160E□□222MK30S
	2,200	16x20	0.073	0.19	1,370	1,235	ESXE160E□□222ML20S
	2,700	12.5x35	0.051	0.13	1,770	1,595	ESXE160E□□272MK35S
	2,700	16x25	0.064	0.17	1,570	1,415	ESXE160E□□272ML25S
	3,300	12.5x40	0.045	0.12	1,980	1,785	ESXE160E□□332MK40S
	3,300	18x20	0.060	0.16	1,580	1,425	ESXE160E□□332MM20S
	3,900	16x30	0.053	0.14	1,810	1,630	ESXE160E□□392ML30S
	3,900	18x25	0.052	0.14	1,830	1,650	ESXE160E□□392MM25S
	4,700	16x35	0.046	0.12	2,030	1,830	ESXE160E□□472ML35S
	4,700	18x30	0.046	0.12	2,030	1,830	ESXE160E□□472MM30S
	5,600	16x40	0.037	0.096	2,320	2,090	ESXE160E□□562ML40S
	6,800	18x35	0.040	0.10	2,240	2,020	ESXE160E□□682MM35S
	8,200	18x40	0.036	0.094	2,460	2,215	ESXE160E□□822MM40S
25	10	4x7	5.3	13.7	50	25	ESXE250E□□100MD07D
	22	4x11.5	2.1	5.5	102	51	ESXE250E□□220MDB5D
	22	5x7	3.3	8.6	75	45	ESXE250E□□220ME07D
	39	5x11.5	1.3	3.3	154	108	ESXE250E□□390MEB5D
	39	6.3x7	1.4	3.6	140	98	ESXE250E□□390MF07D
	56	5x15	0.88	2.3	210	147	ESXE250E□□560ME15D
	82	6.3x11.5	0.58	1.5	260	182	ESXE250E□□820MFB5D
	120	6.3x15	0.38	0.99	350	245	ESXE250E□□121MF15D
	150	8x12	0.33	0.86	400	280	ESXE250E□□151MH12D
	180	10x12.5	0.26	0.68	510	360	ESXE250E□□181MJC5S
	220	8x15	0.23	0.60	500	350	ESXE250E□□221MH15D
	270	8x20	0.18	0.47	650	455	ESXE250E□□271MH20D
	270	10x15	0.21	0.55	635	445	ESXE250E□□271MJ15S
	470	10x20	0.14	0.36	860	690	ESXE250E□□471MJ20S
	470	12.5x15	0.12	0.31	970	780	ESXE250E□□471MK15S
	560	10x25	0.12	0.31	1,030	825	ESXE250E□□561MJ25S
	680	10x30	0.090	0.23	1,150	920	ESXE250E□□681MJ30S
	820	12.5x20	0.085	0.22	1,120	900	ESXE250E□□821MK20S
	820	16x15	0.098	0.25	1,100	880	ESXE250E□□821ML15S
	1,000	12.5x25	0.071	0.18	1,320	1,060	ESXE250E□□102MK25S
	1,200	18x15	0.078	0.20	1,280	1,155	ESXE250E□□122MM15S
	1,500	12.5x30	0.062	0.16	1,540	1,390	ESXE250E□□152MK30S
	1,500	16x20	0.072	0.19	1,370	1,235	ESXE250E□□152ML20S
	1,800	12.5x35	0.050	0.13	1,770	1,595	ESXE250E□□182MK35S
	1,800	16x25	0.063	0.16	1,570	1,415	ESXE250E□□182ML25S
	2,200	12.5x40	0.044	0.11	1,980	1,785	ESXE250E□□222MK40S
	2,200	18x20	0.060	0.16	1,580	1,425	ESXE250E□□222MM20S
	2,700	16x30	0.053	0.14	1,810	1,630	ESXE250E□□272ML30S
	2,700	18x25	0.051	0.13	1,830	1,650	ESXE250E□□272MM25S
	3,300	16x35	0.045	0.12	2,030	1,830	ESXE250E□□332ML35S
	3,300	18x30	0.045	0.12	2,030	1,830	ESXE250E□□332MM30

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L (mm)	Impedance (Ωmax/ 100kHz)		Rated ripple current (mAmps/105°C)		Part No.
			20°C	-10°C	100kHz	120Hz	
25	3,900	18×35	0.040	0.10	2,240	2,020	ESXE250E□□392MM35S
	4,700	18×40	0.036	0.094	2,460	2,215	ESXE250E□□472MM40S
35	6.8	4×7	5.2	13.4	50	25	ESXE350E□□6R8MD07D
	12	5×7	3.2	8.3	75	38	ESXE350E□□120ME07D
	15	4×11.5	2.1	5.4	102	51	ESXE350E□□150MDB5D
	27	5×11.5	1.2	3.1	154	77	ESXE350E□□270MEB5D
	27	6.3×7	1.3	3.4	140	70	ESXE350E□□270MF07D
	39	5×15	0.87	2.3	210	147	ESXE350E□□390ME15D
	56	6.3×11.5	0.57	1.5	260	182	ESXE350E□□560MFB5D
	82	6.3×15	0.37	0.96	350	245	ESXE350E□□820MF15D
	100	8×12	0.32	0.83	400	280	ESXE350E□□101MH12D
	120	10×12.5	0.26	0.68	510	360	ESXE350E□□121MJC5S
	150	8×15	0.23	0.60	500	350	ESXE350E□□331MH15D
	180	10×15	0.21	0.55	635	445	ESXE350E□□181MJ15S
	220	8×20	0.18	0.47	650	455	ESXE350E□□221MH20D
	330	10×20	0.13	0.34	860	605	ESXE350E□□331MJ20S
	330	12.5×15	0.11	0.29	970	680	ESXE350E□□331MK15S
	390	10×25	0.11	0.29	1,030	825	ESXE350E□□391MJ25S
	470	10×30	0.089	0.23	1,150	920	ESXE350E□□471MJ30S
	560	12.5×20	0.083	0.22	1,120	900	ESXE350E□□561MK20S
	560	16×15	0.096	0.25	1,100	880	ESXE350E□□561ML15S
	680	12.5×25	0.070	0.18	1,320	1,060	ESXE350E□□681MK25S
	820	18×15	0.076	0.20	1,280	1,155	ESXE350E□□821MM15S
	1,000	12.5×30	0.061	0.16	1,540	1,390	ESXE350E□□102MK30S
	1,000	16×20	0.071	0.18	1,370	1,100	ESXE350E□□102ML20S
	1,200	12.5×35	0.049	0.13	1,770	1,595	ESXE350E□□122MK35S
	1,200	16×25	0.062	0.16	1,570	1,415	ESXE350E□□122ML25S
	1,500	12.5×40	0.043	0.11	1,980	1,785	ESXE350E□□152MK40S
	1,500	18×20	0.059	0.15	1,580	1,425	ESXE350E□□152MM20S
	1,800	16×30	0.052	0.14	1,810	1,630	ESXE350E□□182ML30S
	1,800	18×25	0.050	0.13	1,830	1,650	ESXE350E□□182MM25S
	2,200	16×35	0.044	0.11	2,030	1,830	ESXE350E□□222ML35S
	2,200	18×30	0.044	0.11	2,030	1,830	ESXE350E□□222MM30S
	2,700	16×40	0.036	0.094	2,320	2,090	ESXE350E□□272ML40S
	2,700	18×35	0.039	0.10	2,240	2,020	ESXE350E□□272MM35S
	3,300	18×40	0.035	0.091	2,460	2,215	ESXE350E□□332MM40S
50	4.7	4×7	5.0	13.0	50	20	ESXE500E□□4R7MD07D
	8.2	5×7	3.1	8.1	75	38	ESXE500E□□8R2ME07D
	10	4×11.5	2.0	5.2	102	51	ESXE500E□□100MDB5D
	18	5×11.5	1.2	3.1	154	77	ESXE500E□□180MEB5D
	18	6.3×7	1.3	3.4	140	70	ESXE500E□□180MF07D
	27	5×15	0.84	2.2	210	105	ESXE500E□□270ME15D
	39	6.3×11.5	0.55	1.4	260	182	ESXE500E□□390MFB5D
	56	6.3×15	0.36	0.94	350	245	ESXE500E□□560MF15D
	68	8×12	0.31	0.81	400	280	ESXE500E□□680MH12D
	82	8×15	0.22	0.57	500	350	ESXE500E□□820MH15D
	82	10×12.5	0.25	0.65	510	360	ESXE500E□□820MJC5S
	100	10×15	0.20	0.52	635	445	ESXE500E□□101MJ15S
	120	8×20	0.17	0.44	650	455	ESXE500E□□121MH20D
	180	10×20	0.13	0.34	860	605	ESXE500E□□181MJ20S
	180	12.5×15	0.11	0.29	970	680	ESXE500E□□181MK15S
	220	10×25	0.11	0.29	1,030	725	ESXE500E□□221MJ25S
	330	10×30	0.086	0.22	1,150	805	ESXE500E□□331MJ30S
	330	12.5×20	0.081	0.22	1,120	785	ESXE500E□□331MK20S
	330	16×15	0.093	0.20	1,100	770	ESXE500E□□331ML15S
	470	12.5×25	0.068	0.19	1,320	1,060	ESXE500E□□471MK25S
	470	18×15	0.074	0.19	1,280	1,025	ESXE500E□□471MM15S
	560	12.5×30	0.059	0.16	1,540	1,235	ESXE500E□□561MK30S
	680	12.5×35	0.048	0.14	1,770	1,420	ESXE500E□□681MK35S
	680	16×20	0.069	0.15	1,370	1,100	ESXE500E□□681ML20S
	820	12.5×40	0.042	0.12	1,980	1,585	ESXE500E□□821MK40S
	820	16×25	0.060	0.13	1,570	1,260	ESXE500E□□821ML25S
	820	18×20	0.057	0.15	1,580	1,265	ESXE500E□□821MM20S
	1,000	16×30	0.050	0.13	1,810	1,450	ESXE500E□□102ML30S
	1,000	18×25	0.049	0.13	1,830	1,465	ESXE500E□□102MM25S
	1,200	16×35	0.043	0.11	2,030	1,830	ESXE500E□□122ML35S
	1,500	16×40	0.035	0.091	2,320	2,090	ESXE500E□□152ML40S
63	1,500	18×30	0.043	0.11	2,030	1,830	ESXE630E□□152MM30S
	1,800	18×35	0.038	0.099	2,240	2,020	ESXE630E□□182MM35S
	2,200	18×40	0.034	0.088	2,460	2,215	ESXE630E□□222MM40S
	3.3	4×7	11.2	30.2	38	15	ESXE630E□□3R3MD07D
	5.6	5×7	5.1	13.8	61	31	ESXE630E□□5R6ME07D
	6.8	4×11.5	4.3	11.6	73	37	ESXE630E□□6R8MDB5D
	12	5×11.5	2.0	5.4	124	62	ESXE630E□□120MEB5D
	12	6.3×7	3.0	8.1	95	48	ESXE630E□□120MF07D
	18	5×15	1.4	3.8	170	85	ESXE630E□□180ME15D
	27	6.3×11.5	1.2	3.2	180	90	ESXE630E□□270MFB5D
	39	6.3×15	0.66	1.8	270	190	ESXE630E□□390MF15D
	47	8×12	0.56	1.5	305	215	ESXE630E□□470MH12D
	56	10×12.5	0.50	1.4	380	270	ESXE630E□□560MJC5S
	68	8×15	0.36	0.97	410	290	ESXE630E□□680MH15D
	68	10×15	0.35	0.95	500	350	ESXE630E□□680MJ15S
	82	8×20	0.22	0.57	605	425	ESXE630E□□820MH20D
	120	10×20	0.27	0.74	620	435	ESXE630E□□121MJ20S
	150	10×25	0.20	0.53	795	560	ESXE630E□□151MJ25S
	150	12.5×15	0.25	0.67	640	450	ESXE630E□□151MK15S
	180	10×30	0.16	0.42	955	670	ESXE630E□□181MJ30S
	220	12.5×20	0.16	0.42	890	625	ESXE630E□□221MK20S
	220	16×15	0.15	0.41	960	675	ESXE630E□□221ML15S
	270	12.5×25	0.14	0.38	1,040	730	ESXE630E□□271MK25S
	330	18×15	0.13	0.35	1,130	795	ESXE630E□□331MM15S
	390	12.5×30	0.11	0.29	1,270	1,020	ESXE630E□□391MK30S
	390	16×20	0.12	0.32	1,240	995	ESXE630E□□391ML20S
	470	12.5×35	0.091	0.25	1,450	1,160	ESXE630E□□471MK35S
	470	16×25	0.091	0.25	1,440	1,155	ESXE630E□□471ML25S
	560	12.5×40	0.080	0.22	1,610	1,290	ESXE630E□□561MK40S
	560	18×20	0.091	0.25	1,450	1,160	ESXE630E□□561MM20S
	680	16×30	0.065	0.18	1,790	1,435	ESXE630E□□681ML30S
	680	18×25	0.078	0.21	1,650	1,320	ESXE630E□□681MM25S
	820	16×35	0.056	0.15	2,000	1,600	ESXE630E□□821ML35S
	820	18×30	0.065	0.18	1,850	1,480	ESXE630E□□821MM30S
	1,000	16×40	0.049	0.13	2,200	1,780	ESXE630E□□102ML40S
	1,000	18×35	0.061	0.16	1,990	1,595	ESXE630E□□102MM35S
	1,200	18×40	0.046	0.12	2,370	2,135	ESXE630E□□122MM40S
80	2.2	4×7	11.0	29.7	38	15	ESXE800E□□2R2MD07D
	3.9	5×7	5.0	13.5	61	24	ESXE800E□□3R9ME07D
	4.7	4×11.5	4.2	11.3	73	29	ESXE800E□□4R7MDB5D
	8.2	5×11.5	1.9	5.2	124	62	ESXE800E□□8R2MEB5D
	8.2	6.3×7	2.9	7.8	95	48	ESXE800E□□8R2MF07D
	12	5×15	1.4	3.7	170	85	ESXE800E□□120ME15D
	18	6.3×11.5	1.1	3.0	180	90	ESXE800E□□180MFB5D
	27	6.3×15	0.64	1.7	270	135	ESXE800E□□270MF15D
	33	8×12	0.54	1.5	305	155	ESXE800E□□330MH12D
	39	10×12.5	0.49	1.3	380	270	ESXE800E□□390MJC5S
	47	8×15	0.36	0.97	410	290	ESXE800E□□470MH15D
	56	8×20	0.28	0.74	605	425	ESXE800E□□560MH20D
	56	10×15	0.34	0.90	500	350	ESXE800E□□560MJ15S
	82	10×20	0.26	0.71	620	435	ESXE800E□□820MJ20S
	100	10×25	0.19	0.51	795	560	ESXE800E□□101MJ25S
	100	12.5×15	0.24	0.64	640	450	ESXE800E□□101MK15S
	150	10×30	0.15	0.41	955	670	ESXE800E□□151MJ30S
	150	12.5×20	0.15	0.41	890	625	ESXE800E□□151MK20S
	180	12.5×25	0.14	0.37	1,040	730	ESXE800E□□181MK25S
	180	16×15	0.14	0.38	960	675	ESXE800E□□181ML15S
	220	18×15	0.13	0.34	1,130	795	ESXE800E□□221MM15S
	270	12.5×30	0.10	0.28	1,270	890	ESXE800E□□271MK30S
	270	16×20	0.11	0.31	1,240	870	ESXE800E□□271ML20S
	330	12.5×35	0.088	0.24	1,450	1,015	ESXE800E□□331MK35S
	330	16×25	0.088	0.24	1,440	1,010	ESXE800E□□331ML25S
	390	12.5×40	0.076	0.21	1,610	1,290	ESXE800E□□391MK40S
	390	18×20	0.088	0.24	1,450	1,160	ESXE800E□□391MM20S
	470	16×30	0.063	0.17	1,790	1,435	ESXE800E□□471ML30S
	470	18×25	0.075	0.20	1,650	1,320	ESXE800E□□471MM25S
	560	16×35	0.054	0.15	2,000	1,600	ESXE800E□□561ML35S

□ □ : Lead forming / Taping code

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L (mm)	Impedance (Ωmax/ 100kHz)		Rated ripple current (mAmps/105°C)		Part No.
			20°C	-10°C	100kHz	120Hz	
80	680	16×40	0.048	0.13	2,200	1,780	ESXE800E□□681ML40S
	680	18×30	0.063	0.17	1,850	1,480	ESXE800E□□681MM30S
	820	18×35	0.06	0.16	1,990	1,595	ESXE800E□□821MM35S
	1,000	18×40	0.044	0.12	2,370	1,900	ESXE800E□□102MM40S
100	1.5	4×7	10.8	29.2	38	15	ESXE101E□□1R5MD07D
	2.7	5×7	4.9	13.2	61	24	ESXE101E□□2R7ME07D
	3.3	4×11.5	4.1	11.1	73	29	ESXE101E□□3R3MDB5D
	5.6	5×11.5	1.9	5.1	124	62	ESXE101E□□5R6MEB5D
	5.6	6.3×7	2.8	7.6	95	48	ESXE101E□□5R6MF07D
	8.2	5×15	1.3	3.6	170	85	ESXE101E□□8R2ME15D
	12	6.3×11.5	1.1	3.0	180	90	ESXE101E□□120MFB5D
	18	6.3×15	0.62	1.7	270	135	ESXE101E□□180MF15D
	22	8×12	0.53	1.4	305	155	ESXE101E□□220MH12D
	27	10×12.5	0.48	1.3	380	190	ESXE101E□□270MJC5S
	33	8×15	0.35	0.95	410	205	ESXE101E□□330MH15D
	33	10×15	0.33	0.89	500	250	ESXE101E□□330MJ15S
	39	8×20	0.27	0.73	605	425	ESXE101E□□390MH20D
	56	10×20	0.26	0.70	620	435	ESXE101E□□560MJ20S
	68	10×25	0.19	0.50	795	560	ESXE101E□□680MJ25S
100	68	12.5×15	0.23	0.63	640	450	ESXE101E□□680MK15S
	100	10×30	0.15	0.40	955	670	ESXE101E□□101MJ30S
	100	12.5×20	0.15	0.40	890	625	ESXE101E□□101MK20S
	120	12.5×25	0.13	0.36	1,040	730	ESXE101E□□121MK25S
	120	16×15	0.14	0.38	960	675	ESXE101E□□121ML15S
	150	18×15	0.12	0.33	1,130	795	ESXE101E□□151MM15S
	180	12.5×30	0.10	0.27	1,270	890	ESXE101E□□181MK30S
	180	16×20	0.11	0.30	1,240	870	ESXE101E□□181ML20S
	220	12.5×35	0.087	0.23	1,450	1,015	ESXE101E□□221MK35S
	220	16×25	0.086	0.23	1,440	1,010	ESXE101E□□221ML25S
	270	12.5×40	0.074	0.20	1,610	1,130	ESXE101E□□271MK40S
	270	18×20	0.086	0.23	1,450	1,015	ESXE101E□□271MM20S
	330	16×30	0.062	0.17	1,790	1,255	ESXE101E□□331ML30S
	330	18×25	0.074	0.20	1,650	1,155	ESXE101E□□331MM25S
	390	16×35	0.059	0.16	1,990	1,595	ESXE101E□□391ML35S
	390	18×30	0.062	0.17	1,850	1,480	ESXE101E□□391MM30S
	470	16×40	0.047	0.13	2,200	1,780	ESXE101E□□471ML40S
	560	18×35	0.053	0.14	2,000	1,600	ESXE101E□□561MM35S
	680	18×40	0.043	0.12	2,370	1,900	ESXE101E□□681MM40S

□□ : Lead forming / Taping code

◆RATED RIPLE CURRENT MULTIPLIERS

●Frequency Multipliers

Capacitance (μF)	Frequency (Hz)					
	50	120	300	1k	10k	100k
1.5 to 4.7	0.30	0.40	0.50	0.70	0.80	1.00
5.6 to 33	0.40	0.50	0.60	0.80	0.90	1.00
39 to 330	0.60	0.70	0.80	0.90	0.95	1.00
390 to 1,000	0.65	0.80	0.90	0.98	1.00	1.00
1,200	0.80	0.90	0.95	0.98	1.00	1.00