



ROBERT STĘPIEŃ
HURTOWNIA CZĘŚCI ELEKTRONICZNYCH
podzespoly-elektroniczne.pl

Chwytnak pomiarowy 20.171.1



Dane techniczne:

Nazwa: Chwytnak pomiarowy

Symbol: 20.171.1

Rodzaj chwytaka: krokodylkowy

Zakres zaciskania: 13mm

Kolor izolacji: czerwony

Długość całkowita: 157,5mm

Montaż przewodu: wtykany (gniazdo bananowe 4mm)

Prąd znamionowy: 10A

Napięcie znamionowe: 1000V

Materiał styku: mosiądz niklowany

Materiał izolacji: poliamid

Producent Amass

Certyfikaty RoHS


www.podzespoly-elektroniczne.pl

Robert Stępień Hurtownia Części Elektronicznych; Adres: ul. Wolumen 2, pawilon 71; 01-912 Warszawa; tel.: 601 296 402 / sklep@podzespoly-elektroniczne.pl

www.podzespoly-elektroniczne.pl

Robert Stępień Hurtownia Części Elektronicznych; Adres: ul. Wolumen 2, pawilon 71; 01-912 Warszawa; tel.: 601 296 402 /
sklep@podzespoly-elektroniczne.pl

20.132. *

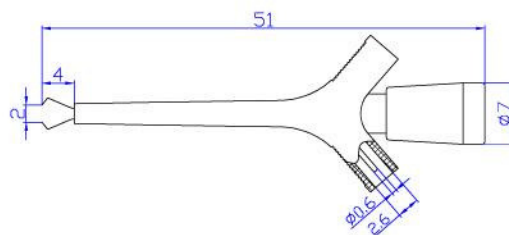

Feature

Mini test clip with pin connection. Specially for the thin wires and small terminals.

Material

Insulator: PA


Body: Brass

Surface: Gold plated

Rated voltage/current:

30Vac-60Vdc/Max. 2A

20.135. *

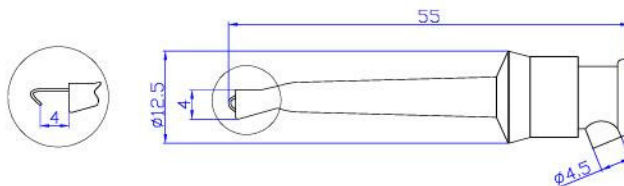

Feature

Mini test clip with solder connection. Press with the good feeling and contact hook for wires up easily.

Material


Insulator: PA

Body: Brass

Rated voltage/current:

30Vac-60Vdc/Max. 10A

20.155. *

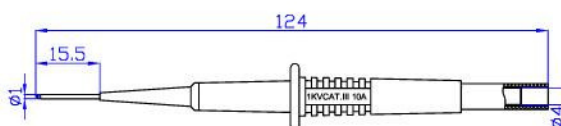

Feature

Safety test probe with 4mm socket connection. Sharp stainless steel needle.

Material

Insulator: PA


Body: Stainless steel & Brass

Rated voltage/current:

CAT II 600V/Max. 1A



20.156. *

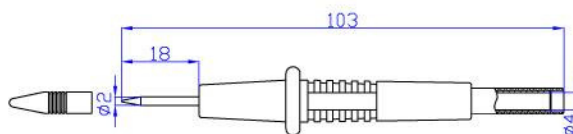

Feature

Safety test probe with 4mm socket connection. Sharp stainless steel tip with the perfectly protective cap.

Material

Insulator: PA

Body: Stainless steel

Rated voltage/current:


CAT II 1000V/Max. 10A



20.157. *



1 2 3 4 5

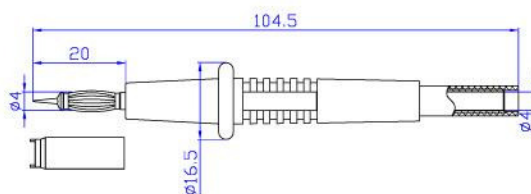

Feature

Safety test probe with 4mm socket connection. Spring-loaded tip with the protective cap.

Material

Insulator: PA
Body: Brass
Spring: Beryllium copper
Surface: Nickel plated

Rated voltage/current:


CATII 1000V/Max.32A



20.161. *



1 2

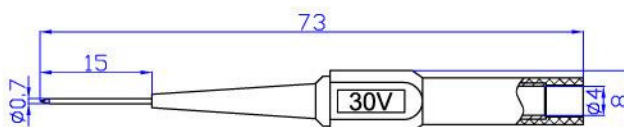

Feature

Safety test probe with 4mm socket connection. Sharp stainless steel needle.

Material

Insulator: PA
Body: Stainless steel & Brass


Rated voltage/current:

30Vac-60Vdc/Max.1A

20.162. *



1 2 3

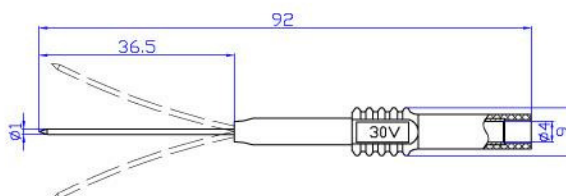

Feature

Safety test clip with 4mm socket connection. Long sharp stainless steel tip and flexible spring with the silicone tube can meet kinds of your request.

Material

Insulator: PA
Body: Stainless steel & Brass

Rated voltage/current:


30Vac-60Vdc/Max.10A



20.163. *



1 2

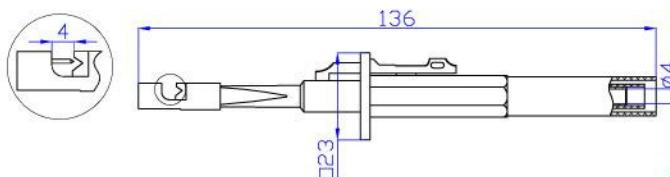

Feature

Safety test probe with 4mm socket connection. Stainless steel tip can connect with the wire without cutting it.

Material


Insulator: PA
Body: Stainless steel & Brass

Rated voltage/current:

CATIII 1000V/Max.10A



20.164. *



Feature

Safety test probe with 4mm socket connection. Sharp stainless steel tip with the protective cap.

Material

Insulator: PA


Body: Stainless steel & Brass

Rated voltage/current:

CATIII 1000V/Max.10A



20.168. *

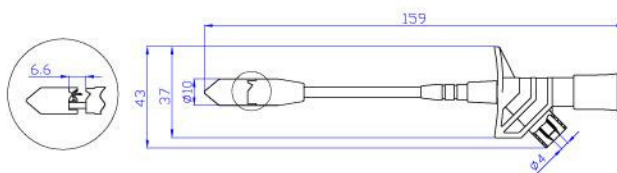

Feature

Safety test probe with 4mm socket connection. Stainless steel tip can connect with the wire without cutting it.

Material

Insulator: PA

Body: Brass & Stainless steel


Surface: Nickel plated

Rated voltage/current:

CATIII 1000V/Max.10A



20.169. *

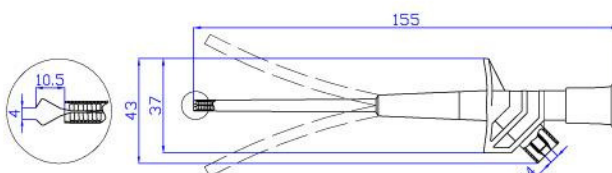

Feature

Safety test clip with 4mm socket connection. Flexible spring with the tube can contact the wires and terminals even at the corner.

Material

Insulator: PA


Body: Brass & Stainless steel

Rated voltage/current:

CATIII 1000V/Max.10A



20.211. *

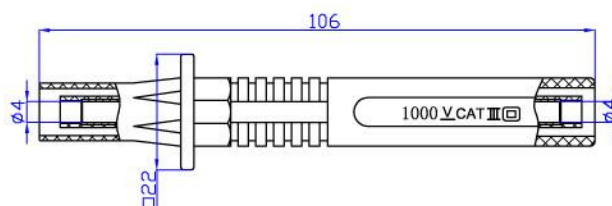

Feature

Safety test probe with 4mm socket connection on both end. Fuse inside.

Material

Insulator: PA

Body: Brass

Rated voltage/current:


CATIII 1000V/Max.20A



20.212. *



090.0058

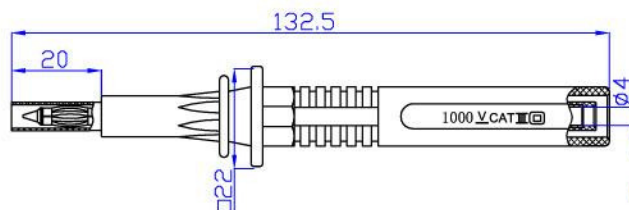

Material

Insulator: PA

Body: Brass

Rated voltage/current:


CAT III 1000V/Max.20A

Feature

Safety test probe with 4mm socket connection. Spring loaded side with the shrinkable tube. Fuse inside.



20.170. *

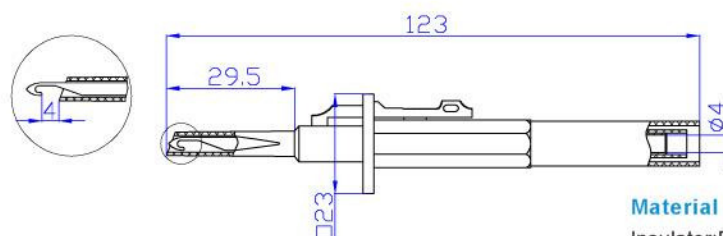

Material

Insulator: PA

Body: Brass & Stainless steel


Rated voltage/current:

CAT III 1000V/Max.10A

Feature

Safety test clip with 4mm socket connection. The clip can connect the terminals easily.

20.601. *

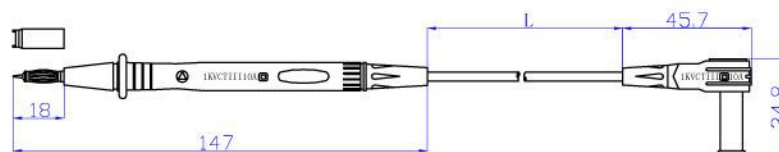


Feature

Safety test lead one end with the insulated 4mm spring loaded test probe and the other end with the insulated 4mm angled plug. Nickel plated plugs with the protective cap. Red+Black as a set.

Rated voltage/current: CAT III 1000V/10A 0.75mm² PVC 100

20.602. *

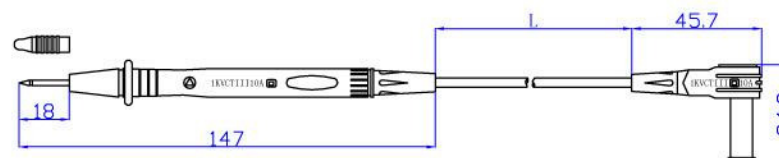

Feature

Safety test lead one end with the insulated test probe and the other end with the insulated 4mm angled plug. Nickel plated plugs with the protective cap. Red+Black as a set.

Rated voltage/current: CAT III 1000V/10A 0.75mm² PVC 100