


25.431. *




Material
 Insulator:PA
 Body:Brass
 Surface:Nickel plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.24A



25.502. *




Material
 Insulator:PA
 Body:Brass
 Spring:Beryllium copper
 Surface:Nickel plated
 *Solder connection
Rated voltage/current
 CATII 1000V/Max.32A



25.450. *




Material
 Insulator:PA
 Body:Brass
 Spring:Beryllium copper
 Surface:Nickel plated
 *Solder connection
Rated voltage/current
 CATII 600V/Max.32A

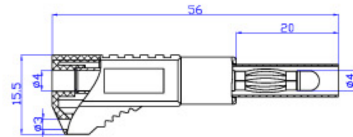

25.503. *




Material
 Insulator:PA
 Body:Brass
 Spring:Beryllium copper
 Surface:Nickel plated
 *Solder connection
Rated voltage/current
 CATII 1000V/Max.32A

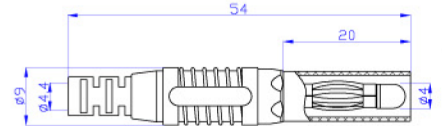

25.451. *





Material
 Insulator:PA
 Body:Brass
 Spring:Beryllium copper
 Surface:Nickel plated
 *Press connection
Rated voltage/current
 30Vac-60Vdc/Max.32A

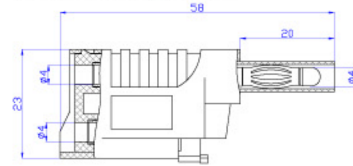

25.504. *




Material
 Insulator:PA
 Body:Brass
 Spring:Beryllium copper
 Surface:Nickel plated
 *Solder connection
Rated voltage/current
 CATII 1000V/Max.32A

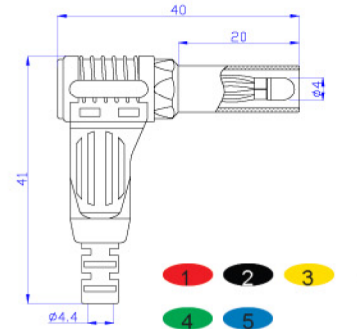

25.501. *



Material
 Insulator:PA
 Body:Brass
 Spring:Beryllium copper
 Surface:Nickel plated
 *Solder connection
Rated voltage/current
 CATII 600V/Max.32A

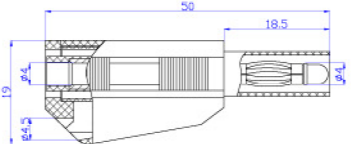

25.505. *



Material
 Insulator:PA
 Body:Brass
 Surface:Nickel plated
 *Solder connection
Rated voltage/current
 CATII 600V/Max.19A

