



# Krokodylek 27.258.1 czerwony gn.ban.4mm;15A/300V



## Dane techniczne:

Nazwa: Krokodylek 27.258.1

Kolor izolacji: czerwony

Długość całkowita: 56mm

Montaż przewodu: wtykany (gniazdo bananowe 4mm)

Prąd znamionowy: 15A

Napięcie znamionowe: 300V

Materiał styku: mosiądz niklowany

Materiał izolacji: poliamid

Zakres zaciskania: 12mm


Producent: Amass

Certyfikaty: RoHS

27.187.\*




**Material**  
 Insulator:PA  
 Body:Brass  
 Surface:Nickel plated  
**Rated voltage/current**  
 30Vac-60Vdc/Max.10A

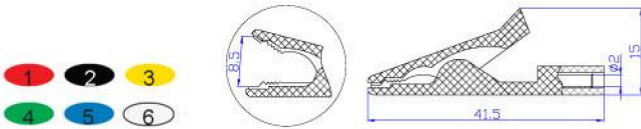

27.259.\*




**Material**  
 Insulator:ABS  
 Body:Steel  
 Surface:Nickel plated  
**Rated voltage/current**  
 30Vac-60Vdc/Max.19A

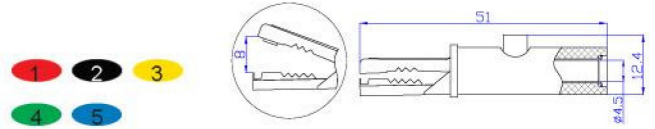

27.258.\*




**Material**  
 Insulator:PA  
 Body:Brass  
 Surface:Nickel plated  
**Rated voltage/current**  
 CATII 300V/Max.15A

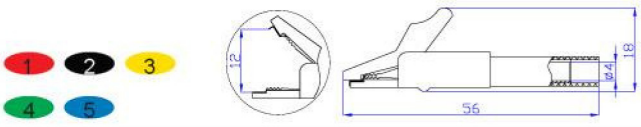

27.320.\*




**Material**  
 Insulator:ABS  
 Body:Brass  
 Surface:Gold plated

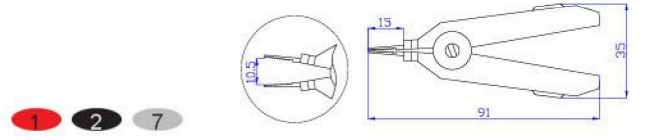

27.262.\*




**Material**  
 Insulator:PA  
 Body:Brass  
 Surface:Nickel plated  
**Rated voltage/current**  
 CATIII 1000V/Max.32A

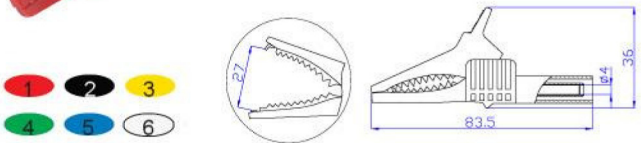

27.330.\*




**Material**  
 Insulator:PVC  
 Body:Brass  
 Surface:Nickel plated

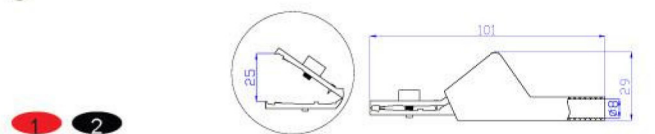

27.263.\*



**Material**  
 Insulator:PA  
 Body:Brass  
 Surface:Nickel plated  
**Rated voltage/current**  
 CATIII 1000V/Max.32A

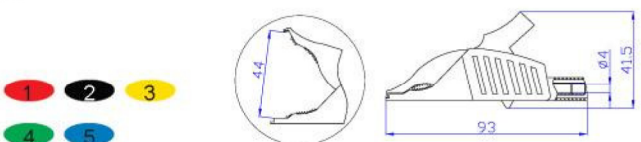

27.710/711/712.\*



**Material**  
 Insulator:PVC  
 Body:Steel  
 Surface:Nickel plated

