




ROBERT STĘPIEŃ
HURTOWNIA CZĘŚCI ELEKTRONICZNYCH
podzespoly-elektroniczne.pl

Przełącznik L90-24W 24VDC 30A RAYEX 1 styk przełączny 30A;24VDC;900mW

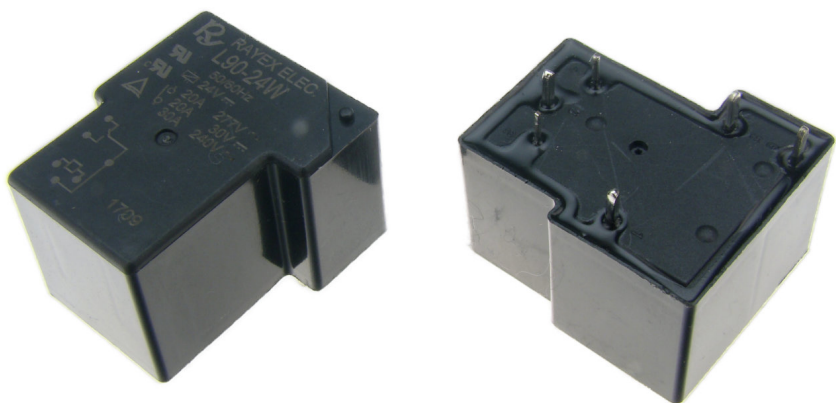

Dane techniczne:

Nazwa: L90-24W

Wersja przełącznika: przemysłowy

Konfiguracja styków: 1 styk przełączny

Napięcie cewki nominalne: 24VDC

Prąd styków maks. : 30A


Producent: RAYEX

www.podzespoly-elektroniczne.pl

Robert Stępień Hurtownia Części Elektronicznych; Adres: ul. Wolumen 2, pawilon 71; 01-912 Warszawa; tel.: 601 296 402 /
sklep@podzespoly-elektroniczne.pl

FEATURES

- Up to 30A switching capacity in 1PST and 20A switching in 1PDT arrangement
- Open-frame and plastic sealed types are available
- Using at home appliances, power switching appliances, car controller, heating, ventilating, and conditioning systems

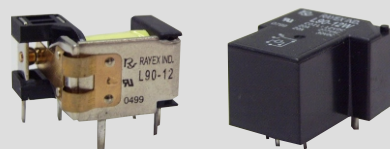

UL FILE NO.: E126167
CUL FILE NO.: E126157
TUV FILE NO.: R50008132

ORDERING INFORMATION

L90 A S — 12 A W
1 2 3 4 5 6

- | | |
|---|------------------------------|
| 1. Type | 4. Coil Nominal Voltage |
| 2. Contact Arrangement | 5. Coil Nominal Voltage Type |
| Nil : 1 Form C(1PDT) | Nil : DC |
| A : 1 Form A(1PST-NO) | A : AC |
| B : 1 Form B(1PST-NC) | 6. Enclosure Type |
| 3. Common Terminals Type | Nil : Open Type |
| Nil : Standard Type | W : Sealed Type |
| S : Without Common Terminal
between coil terminals | |

COIL DATA(at 25°C)


DC 0.9 W				AC 1.2 VA			
Coil Nominal Voltage (VDC)	Resistance Tol.±10% (Ohms)	Maximum Pick Up Voltage (V)	Minimum Drop Out Voltage (V)	Coil Nominal Voltage (50/60Hz)	Resistance Tol.±10% (Ohms)	Maximum Pick Up Voltage (V)	Minimum Drop Out Voltage (V)
5	27	3.75	0.5	6	10	5.1	0.6
6	40	4.5	0.6	12	43	10.2	1.2
9	97	6.75	0.9	24	160	20.4	2.4
12	155	9.0	1.2	110	3,160	93.5	11.0
18	380	13.5	1.8	220	13,490	187.0	22.0
24	660	18.0	2.4	277	19,900	235.4	27.7
48	2,560	36.0	4.8				

CONTACT RATING


1A(1PST-NO)	Resistive (Cos. = 1)	AC 240V / 30A	AC 277V / 20A	DC 30V / 20A
1B(1PST-NC)	Resistive (Cos. = 1)	AC 240V / 20A	AC 277V / 15A	DC 30V / 10A
1C(1PDT)	Resistive (Cos. = 1)	NO : AC 240V / 30A	NO : AC 277V / 20A	NO:DC 30V / 20A
	Resistive (Cos. = 1)	NC : AC 240V / 20A	NC : AC 277V / 15A	NC:DC 30V / 10A

DIMENSIONS(mm)

SEALED TYPE

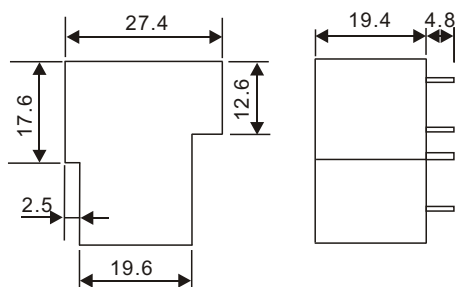


OPEN TYPE

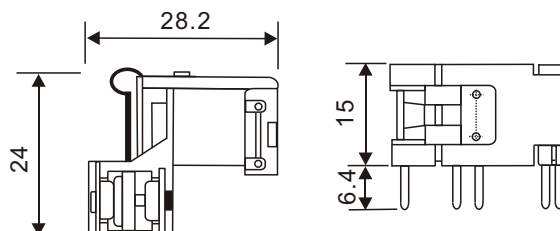


P.C.B LAYOUT
(BOTTOM VIEW)


WIRING DIAGRAM(BOTTOM VIEW)

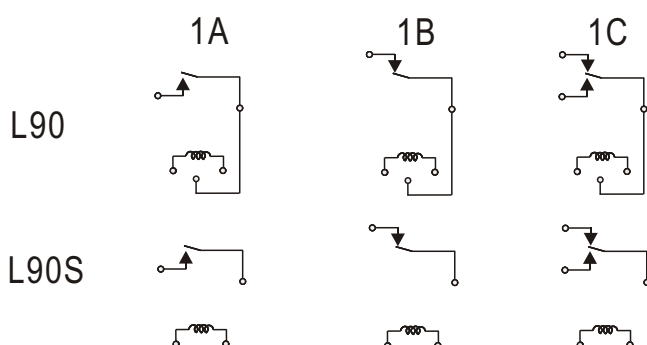

L90



L90S



GENERAL DATA

Insulation Resistance	500 M Min. (DC 500V)
Dielectric Strength	1,500 VAC, 50/60Hz between contact.
	2,000 VAC(L90S:2500), 50/60Hz between all elements
Contact Material	Silver- Cadmium Oxide as standard.
Contact Resistance	50 milliohms max. (initial value)
Shock Resistance	Malfunction: 10G(11ms) ; Destructive: 100G(6ms)
Vibration Resistance	Malfunction: 10 to 55 Hz. at Double Amplitude of 1.5 mm
	Destructive: 10 to 55 Hz. at Double Amplitude of 1.5 mm
Operation Time	15 ms max.
Release Time	15 ms max.
Temperature Range	- 55°C ~ + 85°C
Expected Life	With operation rate 30/min.
	Mechanical - 10,000,000 operations min.
	Electrical - 100,000 operations min. at rated load.
Weight	25 grams