



## Chwytek pomiarowy 20.170.2



### **Dane techniczne:**

Nazwa: Chwytek pomiarowy

Symbol: 20.170.2

Rodzaj chwytaka: haczykowy

Zakres zaciskania: 4mm

Kolor izolacji: czarny

Długość całkowita: 123mm

Montaż przewodu: wtykany(gniazdo bananowe 4mm)

Prąd znamionowy: 10A

Napięcie znamionowe: 1000V

Materiał styku: stal nierdzewna


Materiał izolacji: poliamid

Producent Amass

Certyfikaty RoHS

[www.podzespoly-elektroniczne.pl](http://www.podzespoly-elektroniczne.pl)

### 20.132.\*

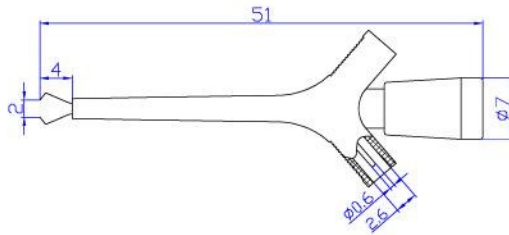

#### Feature


Mini test clip with pin connection. Specially for the thin wires and small terminals.

#### Material

Insulator: PA  
Body: Brass  
Surface: Gold plated

**Rated voltage/current:**  
30Vac-60Vdc/Max.2A

### 20.135.\*

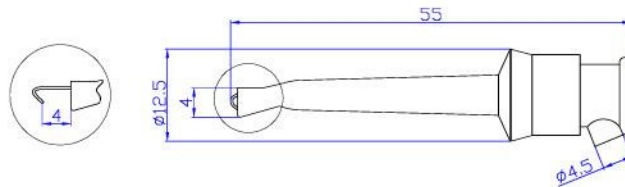

#### Feature


Mini test clip with solder connection. Press with the good feeling and contact hook for wires up easily.

#### Material

Insulator: PA  
Body: Brass

**Rated voltage/current:**  
30Vac-60Vdc/Max.10A

### 20.155.\*

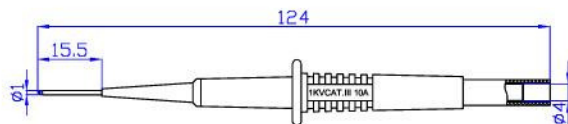

#### Feature

Safety test probe with 4mm socket connection. Sharp stainless steel needle.


#### Material

Insulator: PA  
Body: Stainless steel & Brass

**Rated voltage/current:**  
CATII 600V/Max.1A



### 20.156.\*

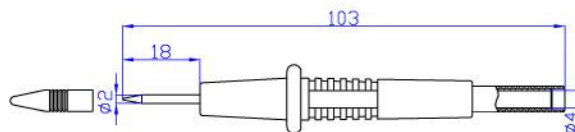

#### Feature

Safety test probe with 4mm socket connection. Sharp stainless steel tip with the perfectly protective cap.


#### Material

Insulator: PA  
Body: Stainless steel

**Rated voltage/current:**  
CATII 1000V/Max.10A



20.157.\*

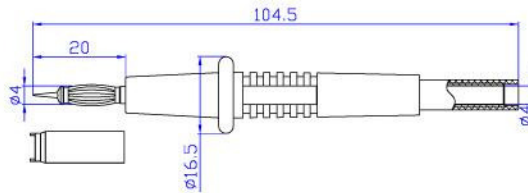

**Material**

Insulator:PA  
Body:Brass  
Spring:Beryllium copper  
Surface:Nickel plated

**Rated voltage/current:**


CATII 1000V/Max.32A

**Feature**

Safety test probe with 4mm socket connection. Spring-loaded tip with the protective cap.



20.161.\*

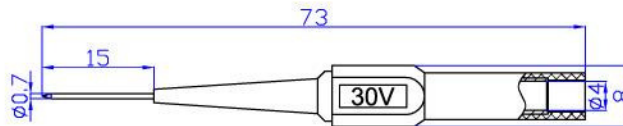

**Material**

Insulator:PA  
Body:Stainless steel & Brass

**Rated voltage/current:**


30Vac-60Vdc/Max.1A

**Feature**

Safety test probe with 4mm socket connection. Sharp stainless steel needle.



20.162.\*

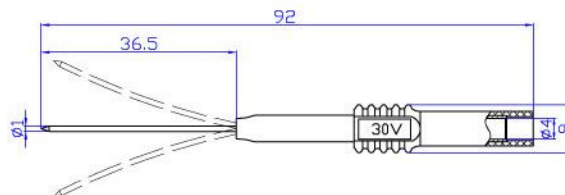

**Material**

Insulator:PA  
Body:Stainless steel & Brass

**Rated voltage/current:**


30Vac-60Vdc/Max.10A

**Feature**

Safety test clip with 4mm socket connection. Long sharp stainless steel tip and flexible spring with the silicone tube can meet kinds of your request.



20.163.\*

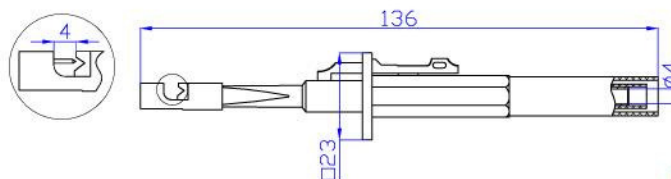

**Material**

Insulator:PA  
Body:Stainless steel & Brass

**Rated voltage/current:**


CATIII 1000V/Max.10A

**Feature**

Safety test probe with 4mm socket connection. Stainless steel tip can connect with the wire without cutting it.



### 20.164.\*



#### Feature


Safety test probe with 4mm socket connection. Sharp stainless steel tip with the protective cap.

#### Material

Insulator: PA  
 Body: Stainless steel & Brass  
**Rated voltage/current:**  
 CATIII 1000V/Max.10A



### 20.168.\*

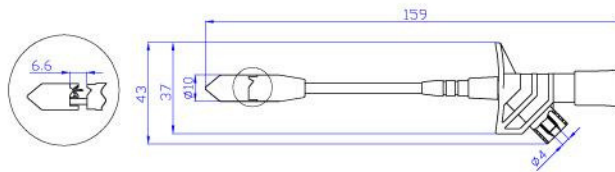

#### Feature


Safety test probe with 4mm socket connection. Stainless steel tip can connect with the wire without cutting it.

#### Material

Insulator: PA  
 Body: Brass & Stainless steel  
 Surface: Nickel plated  
**Rated voltage/current:**  
 CATIII 1000V/Max.10A



### 20.169.\*

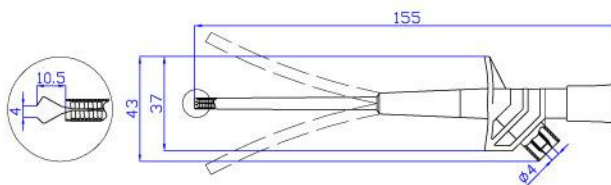

#### Feature


Safety test clip with 4mm socket connection. Flexible spring with the tube can contact the wires and terminals even at the corner.

#### Material

Insulator: PA  
 Body: Brass & Stainless steel  
**Rated voltage/current:**  
 CATIII 1000V/Max.10A



### 20.211.\*

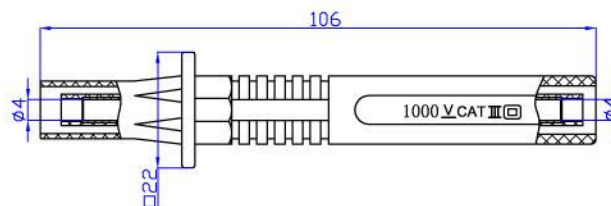

#### Feature

Safety test probe with 4mm socket connection on both end. Fuse inside.


#### Material

Insulator: PA  
 Body: Brass  
**Rated voltage/current:**  
 CATIII 1000V/Max.20A





20.212.\*

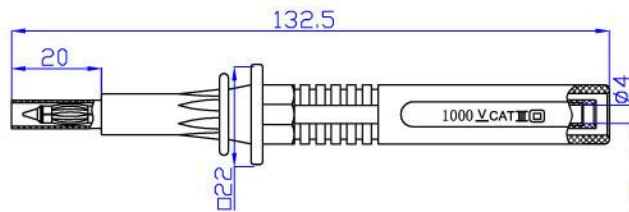

CE

**Material**

Insulator: PA

Body: Brass

**Rated voltage/current:**


CAT III 1000V/Max.20A

**Feature**

Safety test probe with 4mm socket connection. Spring loaded side with the shrinkable tube. Fuse inside.



20.170.\*

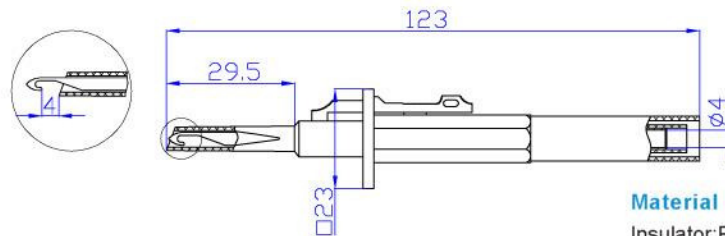

CE

**Material**

Insulator: PA

Body: Brass & Stainless steel

**Rated voltage/current:**


CAT III 1000V/Max.10A

**Feature**

Safety test clip with 4mm socket connection. The clip can connect the terminals easily.



20.601.\*

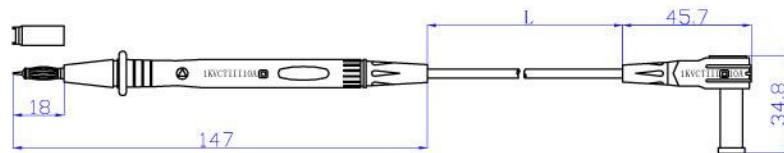

CE


**Feature**

Safety test lead one end with the insulated 4mm spring loaded test probe and the other end with the insulated 4mm angled plug. Nickel plated plugs with the protective cap. Red+Black as a set.



Rated voltage/current: CAT III 1000V/10A 0.75mm<sup>2</sup> PVC 100

20.602.\*

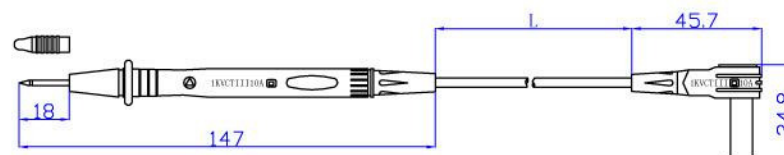

CE

**Feature**

Safety test lead one end with the insulated test probe and the other end with the insulated 4mm angled plug. Nickel plated plugs with the protective cap. Red+Black as a set.



Rated voltage/current: CAT III 1000V/10A 0.75mm<sup>2</sup> PVC 100