



ROBERT STĘPIEŃ
HURTOWNIA CZĘŚCI ELEKTRONICZNYCH
podzespoly-elektroniczne.pl

Przełącznik klawiszowy C1553ALBR3



Dane techniczne:

Rodzaj przełącznika: klawiszowy (kołyskowy)

4-PIN

2 pozycje ON-OFF

2 tory

Kolor elementu wykonawczego: czerwony

Podświetlenie: neonówka 250V

Typ przełącznika: bistabilny

Montaż mechaniczny: na panel

Wyprowadzenia: konektory 6,3x0,8mm

Otwór montażowy / raster: 22x30mm

Prąd styków AC: 16A


Napięcie przełączania AC: 250V AC

Kolor korpusu: czarny

Głębokość montażowa: 26mm

www.podzespoly-elektroniczne.pl

Robert Stępień Hurtownia Części Elektronicznych; Adres: ul. Wolumen 2, pawilon 71; 01-912 Warszawa; tel.: 601 296 402 / sklep@podzespoly-elektroniczne.pl

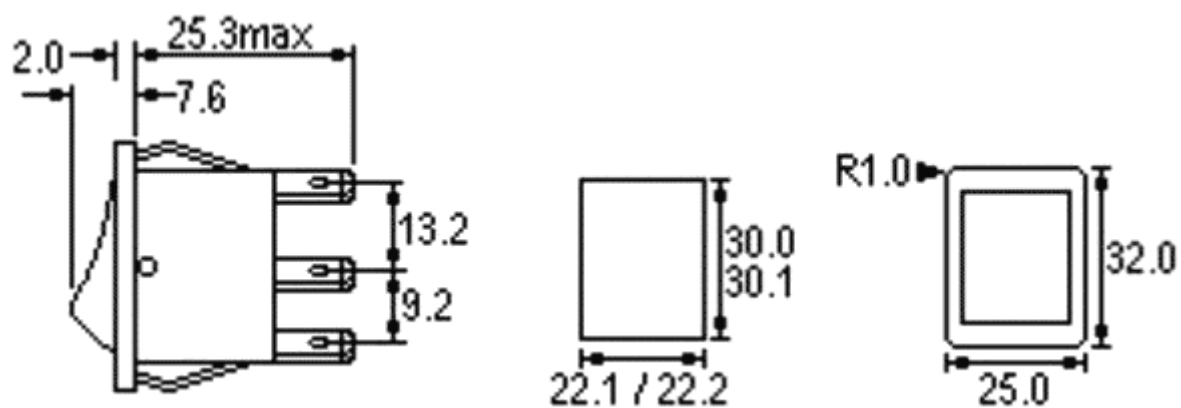

1550 Standard & 1350 High Inrush Switches 150A to EN61058-1 and 16A 250Vac



- ▶ Standard rocker switch
- ▶ 1350/53 high inrush
- ▶ Choice of switching circuits including 3 position
- ▶ Push-on, solder and PCB terminals
- ▶ Choice of bezel styles
- ▶ Choice of panel cut outs
- ▶ Matching indicator
- ▶ Double pole
- ▶ Splashproof option
- ▶ Bezel size 'A' style 27.2 x 22.3



In house test



In house test



1550 Series 16(4)A 250Vac T125

UL CSA 16A 250Vac, (2 posn) 250Vac 1hp, 125Vac 1/2hp, (3 posn) 250 Vac 1/2hp, 125Vac 1/4hp.
UL 85°C, file E45221, CSA file LR10990.

10A 24Vdc.

1350 series 16(4)A 250Vac T85 1E4 (10,000 Ops.)
On request 16(6)A 250Vac T125 5E4 (50,000 Ops.)

150A Inrush to EN61058-1.

UL CSA 20A 250Vac 1hp, 125Vac 1/2hp.
UL 72Vdc 7A, 36Vdc 14A.

UL 85°C, file E45221, CSA file LR10990.

20A 24Vdc

RoHS compliant

3mm contact gap except if marked μ .
Technical data on pages 4 & 5 (switches), 6 (indicators).

C 1553 A L ---
TERMINAL FUNCTION ROCKER BODY PRINT, COLOUR, VOLTAGE ETC

TERMINAL	FUNCTION	ROCKER
C 6.3 x 0.8	Approvals & ratings vary with function ON OFF Switches - ON when pressed over terminal 1	A Softline Matt Lit (not momentary)
H 4.8 x 0.8*		B Splashproof Softline Matt or gloss Gloss only Lit (not momentary)
K 2.8 x 0.8*	1550 Standard 1551 HP rating N/A 1552 HP rating N/A 1553 Not W, X or B rocker 1353 Not W, X or B rocker 1560 μ 1561 μ HP rating N/A 1562 μ In house tests only 1570 μ 125V & 250V 1/2 HP H terminal rated T100 only 1571 μ HP rating N/A H terminal rated T100 only 1572 μ HP rating N/A H terminal rated T100 only 1484 μ In-house tested to 10(3)A 250Vac (B rocker only) 1487 μ In-house tested to 10(3)A 250Vac (B rocker only) 0480 X terminal N/A	V Curved Matt or gloss Gloss only Lit (not momentary)
T Solder		W Splashproof Curved Lit (not momentary)
U Right angle T Solder (Not DP)	1551 ON - OFF (momentary ON)	P Lit window Matt Lit (not momentary)
X PCB 0.8Sq*	1552 ON - OFF (momentary OFF)	X Two colour Matt
	1553 ON - OFF Lit	R Round
	1560 ON - ON	F Flat lens Gloss (0480 only) (ON OFF only - not momentary) Top view
	1561 ON - ON (momentary 1 side)	A Softline lens Matt (0480 only) as F but with raised profile
	1562 2 Circuit ON - ON	
	1570 ON - OFF - ON	
	1571 ON - OFF - ON (momentary 1 side)	
	1572 ON - OFF - ON (momentary 2 sides)	
	1484 3 position selective	
	1487 3 position selective (Consult sales for other switch options)	
	0480 Indicator Technical data on page 6	



C1350AL ---



C1550XL ---



C1553PL ---



C1553RA ---
Shown with M614 bezel cover



C0480AL ---



Optional snap-in M441 barrier









C1553AA with M616 guard
Cut-out 22.0/22.1 x 29.4/29.5
Guard accepts "A" body only



C0480RA ---
Shown with M614 bezel cover

BODY

Panel cut-out * Bezel
Cut-outs must be punched in the direction of insertion

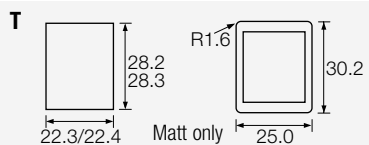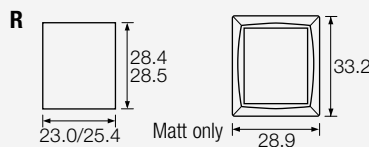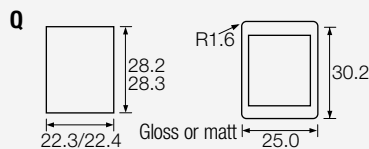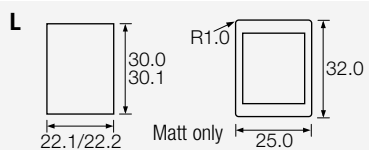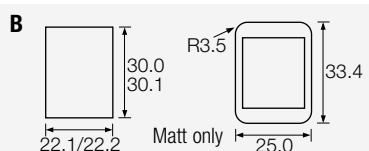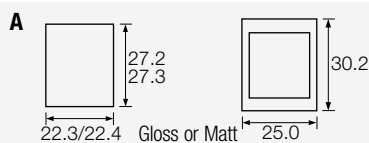

OPTIONS

Finish Matt is standard.

Colour Call sales for custom colours.
A full range is available for large orders.

Legend printing Select from the examples or
call sales for custom legends.

Lamp voltage Call sales for details.

Blanking plates A0494 Dummy units
to fill unused panel holes.


Protective cover (designed to IP65)
Snaps on to A, L, Q or T bodies (add G after body
in cat no), this reduces maximum acceptable
panel thickness to 1.2mm.



Panel sealing washer W42 is available for the
above body sizes, this reduces maximum
acceptable panel thickness to 2mm. Covers are
not suitable for momentary types.

For all options call sales.

DIMENSIONS (mm)



Terminal spacing - Poles 10.2 between centres


Panel thickness

A,Q	0.75 to 3.3mm
L,B,T	0.75 to 2.5mm
R	0.75 to 3.0mm

* For cut-out details on
momentary switches call sales.

1350 High inrush, positive break switching

The 1350 series mechanism ensures
contact welds formed at switch-on,
are positively separated by the
plunger tube acting directly on the
step in the moving contact.



Examples of printing



EN602A



EN730



EN822