




ROBERT STĘPIEŃ  
HURTOWNIA CZĘŚCI ELEKTRONICZNYCH  
podzespoly-elektroniczne.pl

# Dioda Schottky MBR4060PT (duodioda) 40A 60V GI TO-3P/TO-247AD RoHS

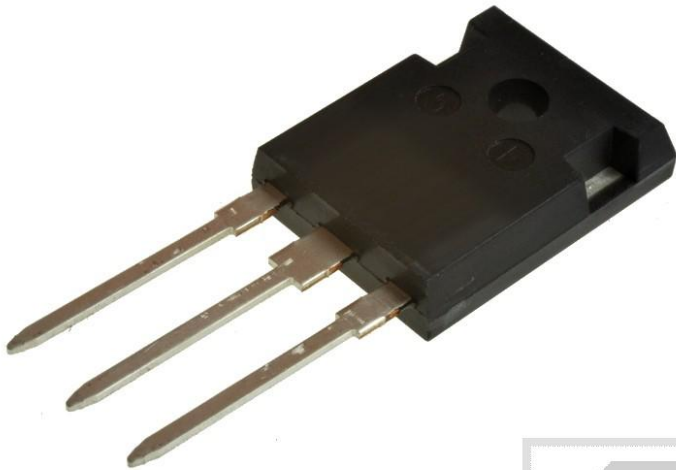

## Dane techniczne:

Nazwa: MBR4060PT

Maksymalne napięcie wsteczne: 60V

Maksymalne napięcie przewodzenia: 720mV

Prąd przewodzenia: 40A

Struktura półprzewodnika: podwójna, wspólna katoda

Obudowa: TO-247AD

Montaż: przewlekany(THT)

[www.podzespoly-elektroniczne.pl](http://www.podzespoly-elektroniczne.pl)

Robert Stępień Hurtownia Części Elektronicznych; Adres: ul. Wolumen 2, pawilon 71; 01-912 Warszawa; tel.: 601 296 402 / sklep@podzespoly-elektroniczne.pl


# MBR4035PT THRU MBR4060PT

## SCHOTTKY RECTIFIER

Reverse Voltage - 35 to 60 Volts

Forward Current - 40.0 Amperes

### TO-247AD

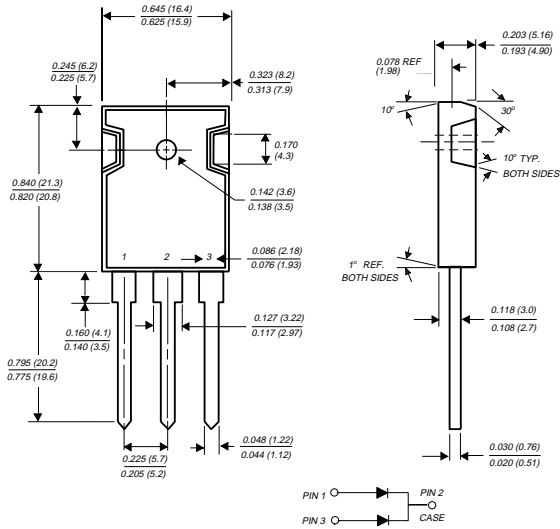

Dimensions in inches and (millimeters)

### FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classifications 94V-0
- ◆ Dual rectifier construction, positive center-tap
- ◆ Metal silicon rectifier, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ High current capability, low forward voltage drop
- ◆ High surge capability
- ◆ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ◆ Guardring for overvoltage protection
- ◆ High temperature soldering guaranteed: 250°C/10 seconds, 0.17" (4.3mm) from case



### MECHANICAL DATA

**Case:** JEDEC TO-247AD molded plastic body  
**Terminals:** Lead solderable per MIL-STD-750, Method 2026

**Polarity:** As marked

**Mounting Position:** Any

**Mounting Torque:** 10 in. - lbs. max.

**Weight:** 0.2 ounce, 5.6 grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	MBR4035PT	MBR4045PT	MBR4050PT	MBR4060PT	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	35	45	50	60	Volts
Maximum working peak reverse voltage	$V_{RMS}$	35	45	50	60	Volts
Maximum DC blocking voltage	$V_{DC}$	35	45	50	60	Volts
Maximum average forward rectified current at $T_C=125^\circ\text{C}$	$I_{(AV)}$	40.0				Amps
Peak repetitive forward current per leg at $T_C=120^\circ\text{C}$ (rated $V_R$ square wave, 20 KHZ)	$I_{FRM}$	40.0				Amps
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	400.0				Amps
Peak repetitive reverse surge current (NOTE 1)	$I_{RRM}$	2.0		1.0		Amps
Maximum instantaneous forward voltage per leg at (NOTE 2)	$V_F$					Volts
		$I_F=20A, T_C=25^\circ\text{C}$	0.70	0.72		
		$I_F=20A, T_C=125^\circ\text{C}$	0.60	0.62		
		$I_F=40A, T_C=25^\circ\text{C}$	0.80	—		
		$I_F=40A, T_C=125^\circ\text{C}$	0.75	—		
Maximum instantaneous reverse current at $T_C=25^\circ\text{C}$ rated DC blocking voltage per leg (NOTE 2) $T_C=125^\circ\text{C}$	$I_R$	1.0				mA
		100.0				
Typical thermal resistance per leg (NOTE 3)	$R_{\theta JC}$	1.2				$^\circ\text{C/W}$
Voltage rate of change (rated $V_R$ )	$dv/dt$	10,000				$\text{V}/\mu\text{s}$
Operating junction temperature range	$T_J$	-65 to +150				$^\circ\text{C}$
Storage temperature range	$T_{STG}$	-65 to +175				$^\circ\text{C}$

#### NOTES:

(1) 2.0μs pulse width, f=1.0 KHZ

(2) Pulse test: 300μs pulse width, 1% duty cycle

(3) Thermal resistance from junction to case per leg

# RATINGS AND CHARACTERISTIC CURVES MBR4035PT THRU MBR4060PT

FIG. 1 - FORWARD CURRENT DERATING CURVE

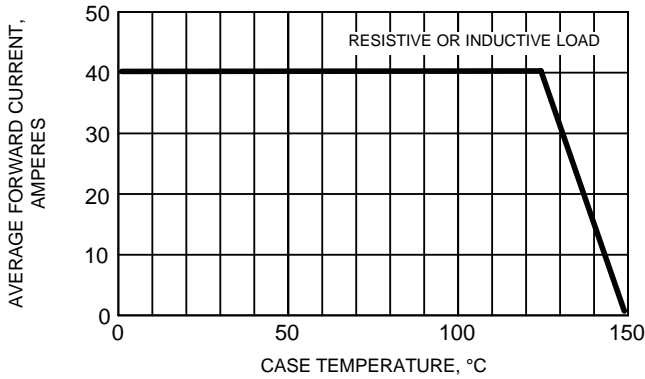


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

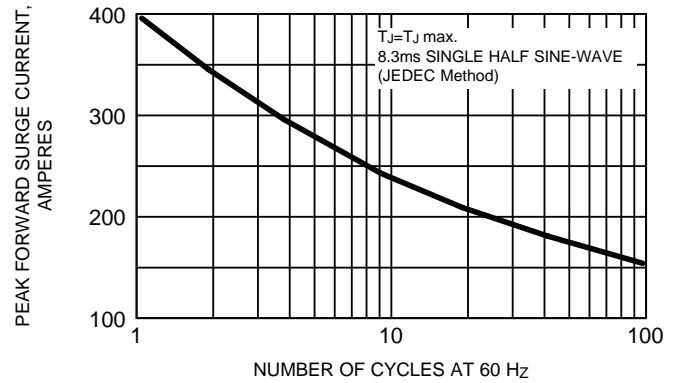


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS PER LEG

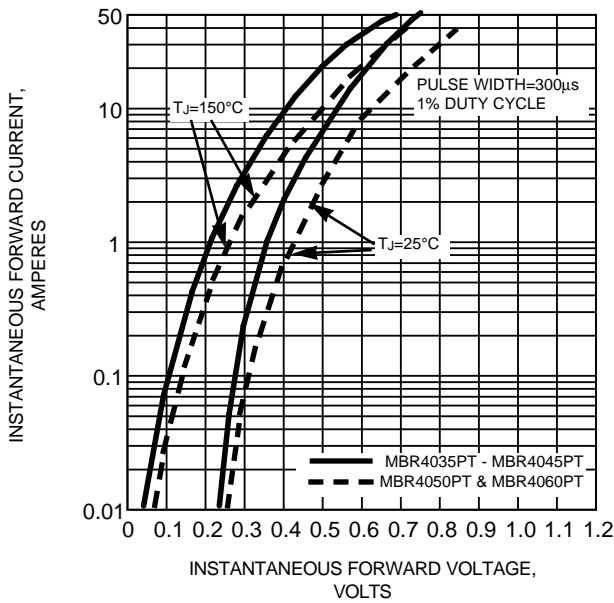


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS PER LEG

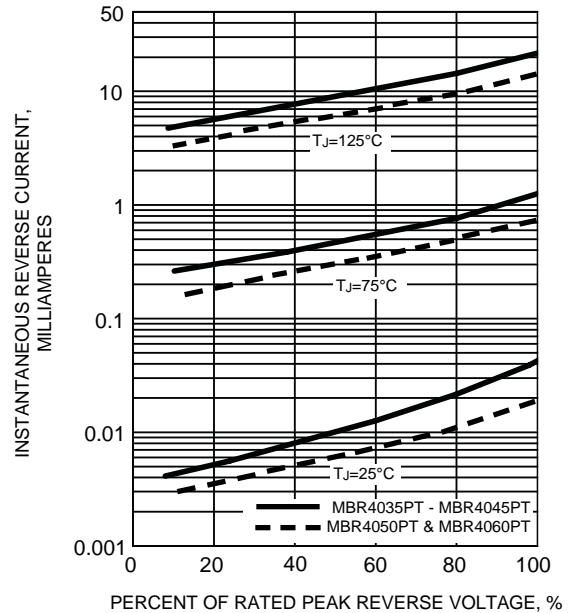


FIG. 5 - TYPICAL JUNCTION CAPACITANCE PER LEG


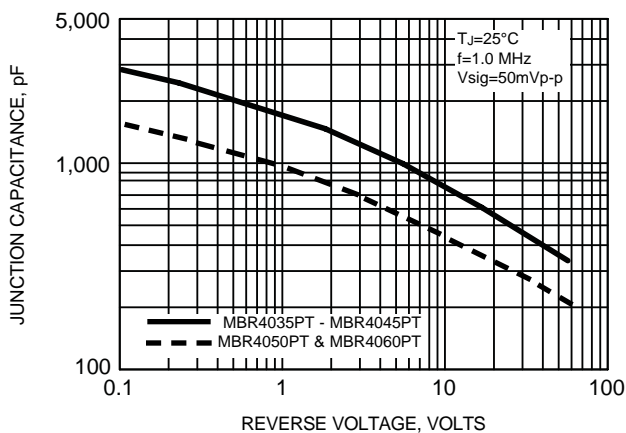


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

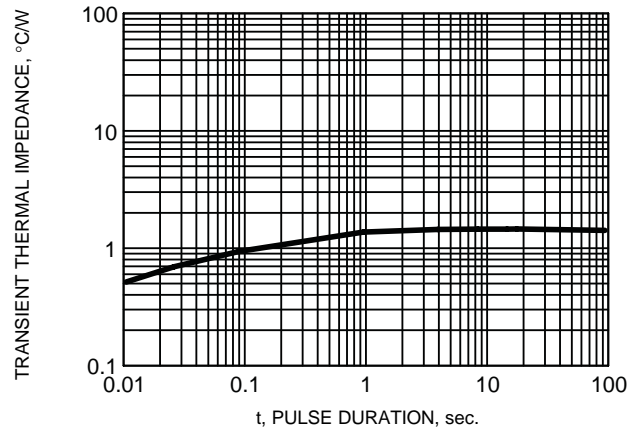

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.