




ROBERT STĘPIEŃ
HURTOWNIA CZĘŚCI ELEKTRONICZNYCH
podzespoly-elektroniczne.pl

Dioda Schottky DSS60-0045B;60A/45V; 155W;TO247-2;IXYS;RoHS

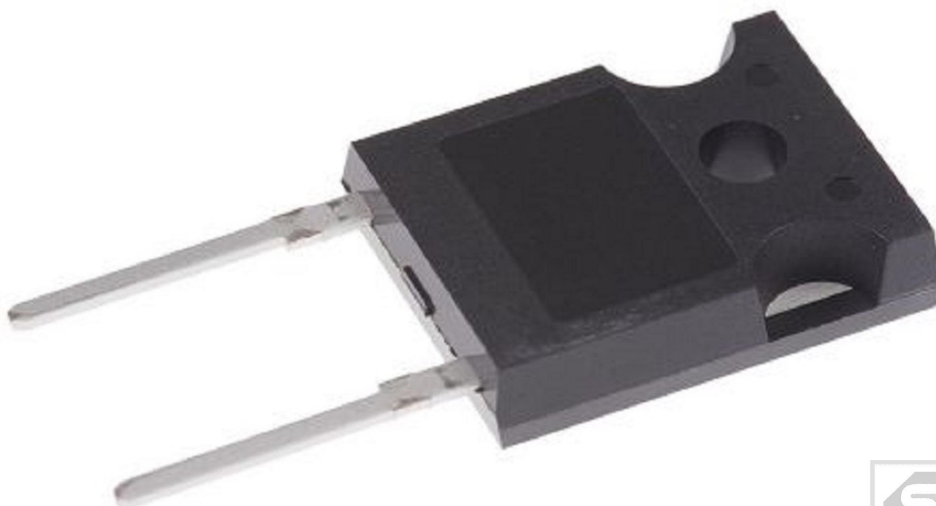

Dane techniczne:

Nazwa: DSS60-0045B

Typ diody: prostownicza Schottky

Napięcie wsteczne maksymalne: 45V

Napięcie przewodzenia maksymalne: 0.57V

Prąd przewodzenia: 60A

Prąd w impulsie maksymalny: 600A

Moc rozpraszana: 155W

Obudowa: TO247-2

Montaż: przewlekany(THT)

Producent: IXYS


www.podzespoly-elektroniczne.pl

Robert Stępień Hurtownia Części Elektronicznych; Adres: ul. Wolumen 2, pawilon 71; 01-912 Warszawa; tel.: 601 296 402 /
sklep@podzespoly-elektroniczne.pl


Power Schottky Rectifier

$$\begin{aligned} I_{FAV} &= 60 \text{ A} \\ V_{RRM} &= 45 \text{ V} \\ V_F &= 0.57 \text{ V} \end{aligned}$$

V_{RSM}	V_{RRM}	Type
V	V	
45	45	DSS 60-0045B



TO-247 AD

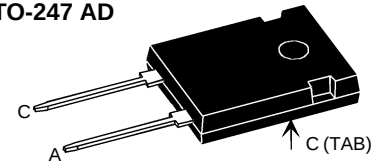

A = Anode, C = Cathode, TAB = Cathode

Symbol	Conditions	Maximum Ratings	
I_{FRMS}		70	A
I_{FAV}	$T_C = 100^\circ\text{C}$; rectangular, $d = 0.5$	60	A
I_{FSM}	$T_{VJ} = 45^\circ\text{C}$; $t_p = 10 \text{ ms}$ (50 Hz), sine	600	A
E_{AS}	$I_{AS} = 20 \text{ A}$; $L = 180 \mu\text{H}$; $T_{VJ} = 25^\circ\text{C}$; non repetitive	57	mJ
I_{AR}	$V_A = 1.5 \cdot V_{RRM}$ typ.; $f = 10 \text{ kHz}$; repetitive	2	A
$(dv/dt)_{cr}$		1000	V/ μs
T_{VJ}		-55...+150	$^\circ\text{C}$
T_{VJM}		150	$^\circ\text{C}$
T_{stg}		-55...+150	$^\circ\text{C}$
P_{tot}	$T_C = 25^\circ\text{C}$	155	W
M_d	mounting torque	0.8...1.2	Nm
Weight	typical	6	g

Features

- International standard package
- Very low V_F
- Extremely low switching losses
- Low I_{RM} -values
- Epoxy meets UL 94V-0

Applications

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

Dimensions see outlines.pdf

Symbol	Conditions	Characteristic Values	
		typ.	max.
I_R ①	$T_{VJ} = 25^\circ\text{C}$ $V_R = V_{RRM}$ $T_{VJ} = 100^\circ\text{C}$ $V_R = V_{RRM}$		10 mA 250 mA
V_F	$I_F = 60 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$ $I_F = 60 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$ $I_F = 120 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$		0.57 V 0.60 V 0.93 V
R_{thJC} R_{thCH}		0.25	0.8 K/W K/W

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0 %
Data according to IEC 60747 and per diode unless otherwise specified

IXYS reserves the right to change limits, Conditions and dimensions.

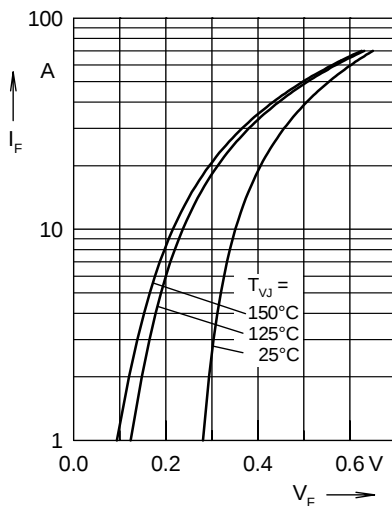


Fig. 1 Maximum forward voltage drop characteristics

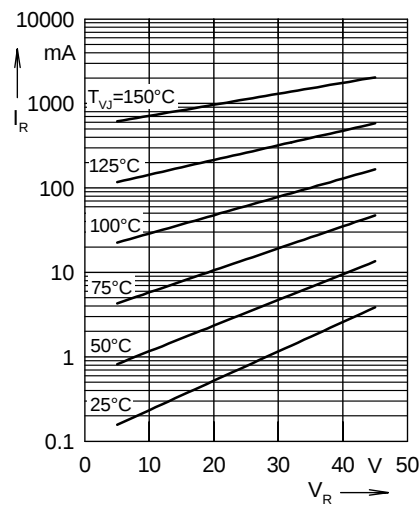


Fig. 2 Typ. value of reverse current I_R versus reverse voltage V_R

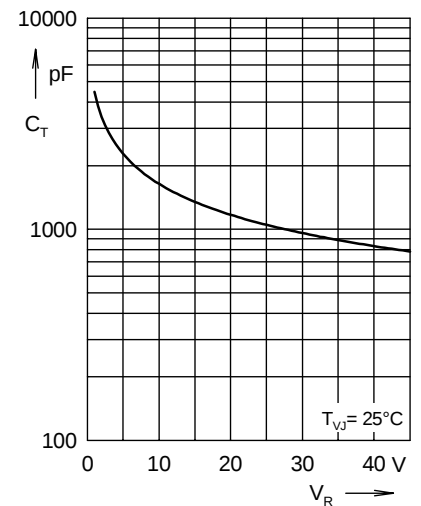


Fig. 3 Typ. junction capacitance C_T versus reverse voltage V_R

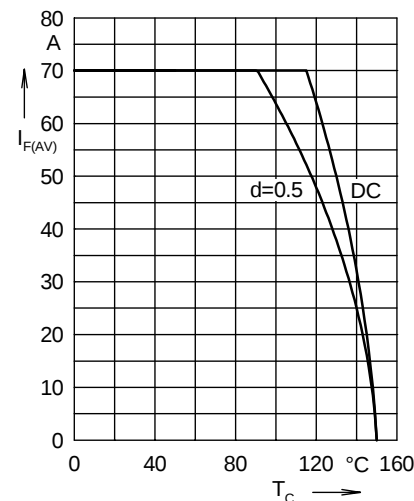


Fig. 4 Average forward current $I_{F(AV)}$ versus case temperature T_C

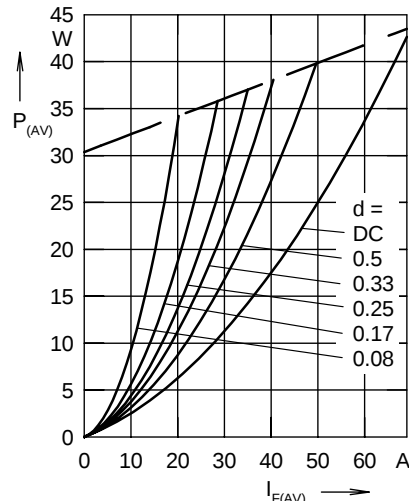


Fig. 5 Forward power loss characteristics

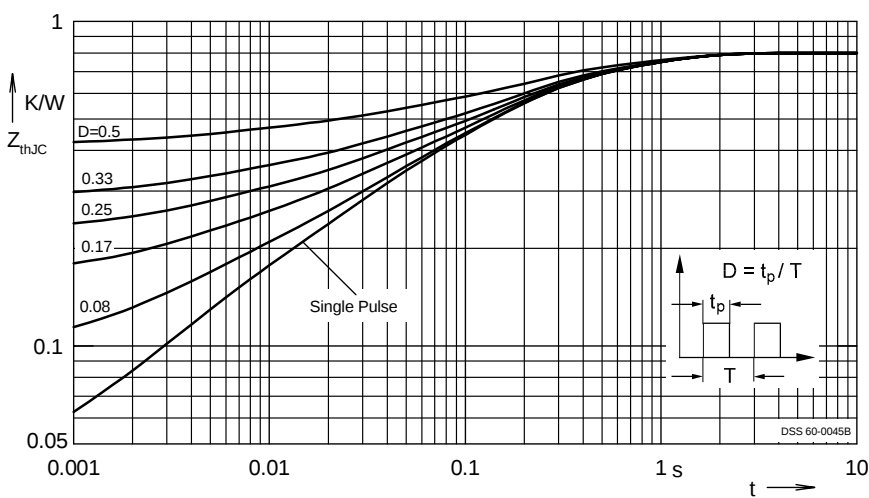


Fig. 6 Transient thermal impedance junction to case at various duty cycles

Note: All curves are per diode