



# Dioda BYV79-150 PHILIPS 14A;150V;30ns;TO220AC



## Dane techniczne:

Nazwa: BYV79-150

Typ: dioda szybka

Napięcie wsteczne maksymalne: 150V

Prąd przewodzenia: 14A

Czas gotowości: 30ns

Obudowa: TO220AC

Producent: PHILIPS

**Rectifier diodes  
ultrafast**

**BYV79 series**

**GENERAL DESCRIPTION**

Glass passivated high efficiency rectifier diodes in a plastic envelope, featuring low forward voltage drop, ultra-fast recovery times and soft recovery characteristic. They are intended for use in switched mode power supplies and high frequency circuits in general where low conduction and switching losses are essential.


**QUICK REFERENCE DATA**

SYMBOL	PARAMETER	MAX.	MAX.	MAX.	UNIT
$V_{RRM}$	Repetitive peak reverse voltage	<b>100</b> 100	<b>150</b> 150	<b>200</b> 200	V
$V_F$	Forward voltage	0.9	0.9	0.9	V
$I_{F(AV)}$	Forward current	14	14	14	A
$t_{tr}$	Reverse recovery time	30	30	30	ns


**PINNING - TO220AC**

PIN	DESCRIPTION
1	cathode (k)
2	anode (a)
tab	cathode (k)

**PIN CONFIGURATION**

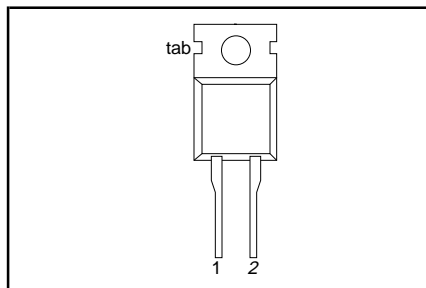

**SYMBOL**

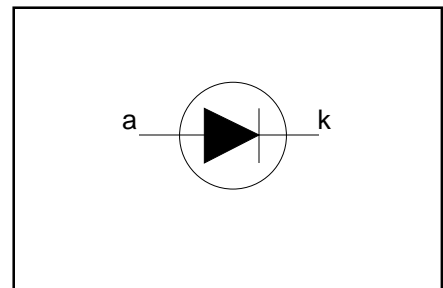

**LIMITING VALUES**

Limiting values in accordance with the Absolute Maximum System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.			UNIT
				-100	-150	-200	
$V_{RRM}$	Repetitive peak reverse voltage		-	100	150	200	V
$V_{RWM}$	Crest working reverse voltage		-	100	150	200	V
$V_R$	Continuous reverse voltage <sup>1</sup>		-	100	150	200	V
$I_{F(AV)}$	Average forward current <sup>2</sup>	square wave; $\delta = 0.5$ ; $T_{mb} \leq 120^\circ\text{C}$	-	14			A
		sinusoidal; $a = 1.57$ ; $T_{mb} \leq 122^\circ\text{C}$	-	12.7			A
$I_{F(RMS)}$	RMS forward current		-	20			A
$I_{FRM}$	Repetitive peak forward current	$t = 25\ \mu\text{s}$ ; $\delta = 0.5$ ; $T_{mb} \leq 120^\circ\text{C}$	-	28			A
$I_{FSM}$	Non-repetitive peak forward current	$t = 10\ \text{ms}$	-	150			A
		$t = 8.3\ \text{ms}$ sinusoidal; with reapplied	-	160			A
$I^2t$	$I^2t$ for fusing	$V_{RWM(max)}$ $t = 10\ \text{ms}$	-	112			A <sup>2</sup> s
$T_{stg}$	Storage temperature		-40	150			°C
$T_j$	Operating junction temperature		-	150			°C

1  $T_{mb} \leq 145^\circ\text{C}$  for thermal stability.

2 Neglecting switching and reverse current losses.

## Rectifier diodes ultrafast

## BYV79 series

### THERMAL RESISTANCES

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$R_{th\ j-mb}$	Thermal resistance junction to mounting base	in free air	-	-	2.0	K/W
$R_{th\ j-a}$	Thermal resistance junction to ambient		-	60	-	K/W

### STATIC CHARACTERISTICS

$T_j = 25\text{ °C}$  unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_F$	Forward voltage	$I_F = 14\text{ A}; T_j = 150\text{ °C}$	-	0.83	0.90	V
		$I_F = 14\text{ A}$	-	0.95	1.05	V
		$I_F = 50\text{ A}$	-	1.20	1.30	V
$I_R$	Reverse current	$V_R = V_{RWM}; T_j = 100\text{ °C}$	-	0.5	1.3	mA
		$V_R = V_{RWM}$	-	5	50	$\mu\text{A}$







### DYNAMIC CHARACTERISTICS

$T_j = 25\text{ °C}$  unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$Q_s$	Reverse recovery charge	$I_F = 2\text{ A}; V_R \geq 30\text{ V}; -di_F/dt = 20\text{ A}/\mu\text{s}$	-	6	15	nC
$t_{rr}$	Reverse recovery time	$I_F = 1\text{ A}; V_R \geq 30\text{ V}; -di_F/dt = 100\text{ A}/\mu\text{s}$	-	20	30	ns
$I_{rrm}$	Peak reverse recovery current	$I_F = 10\text{ A}; V_R \geq 30\text{ V}; -di_F/dt = 50\text{ A}/\mu\text{s}; T_j = 100\text{ °C}$	-	3	4	A
$V_{fr}$	Forward recovery voltage	$I_F = 10\text{ A}; di_F/dt = 10\text{ A}/\mu\text{s}$	-	1	-	V






Rectifier diodes  
ultrafast

BYV79 series

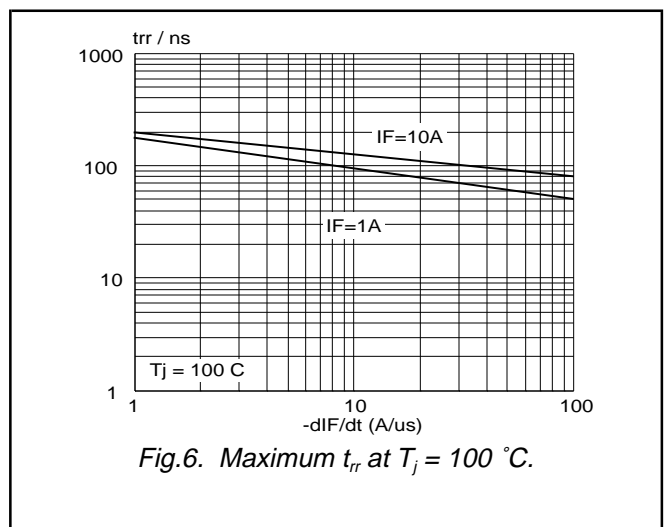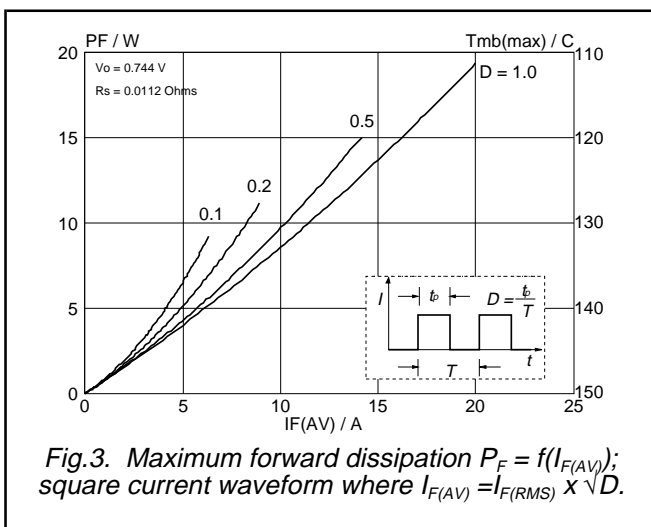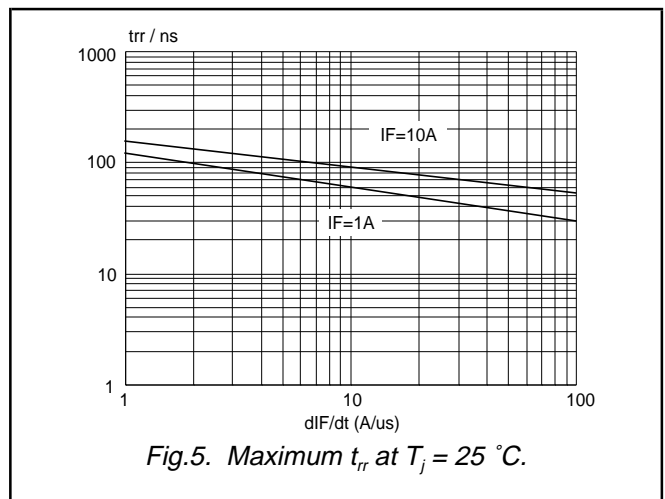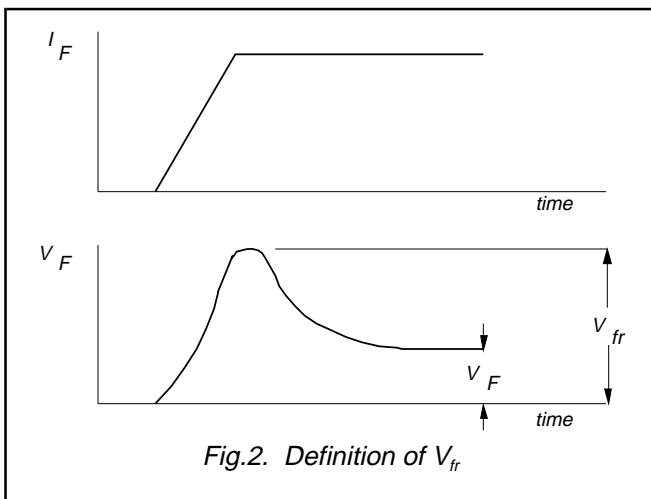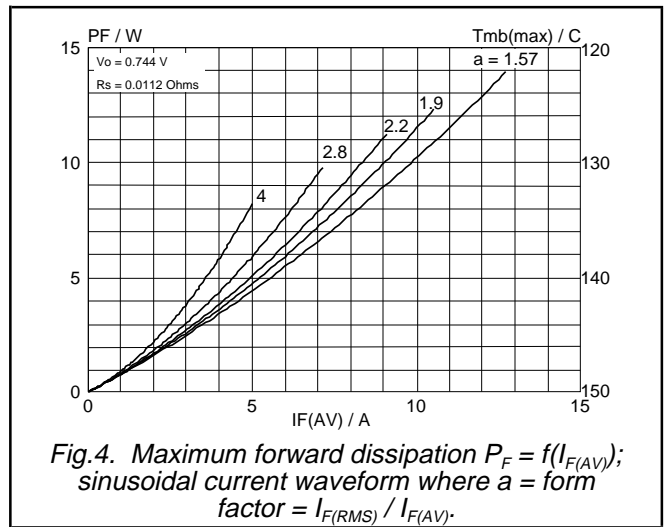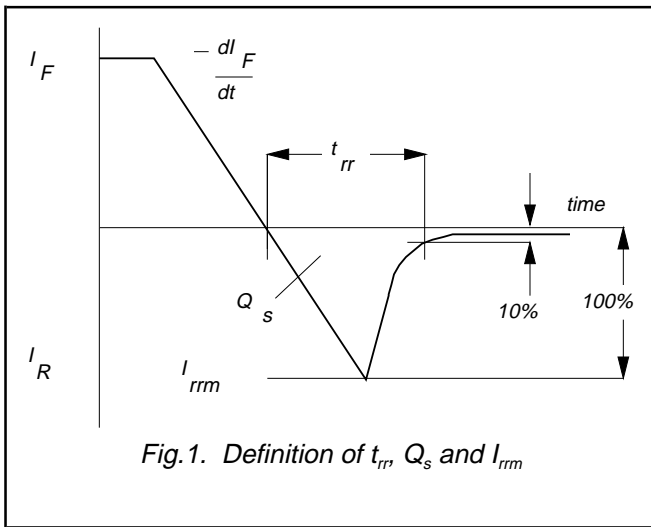

Rectifier diodes  
ultrafast


BYV79 series

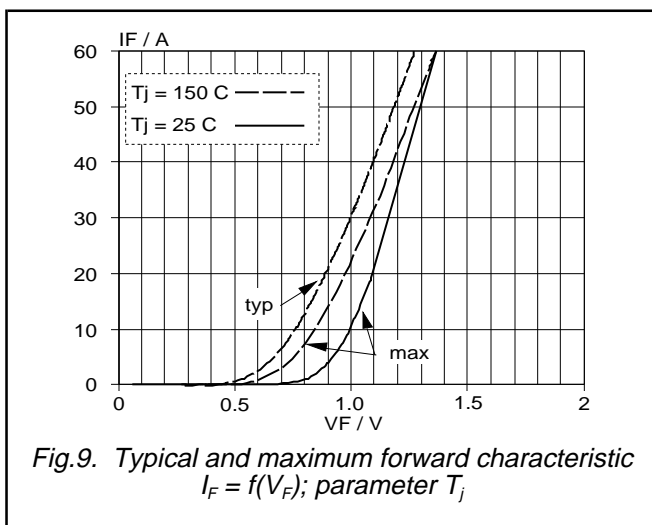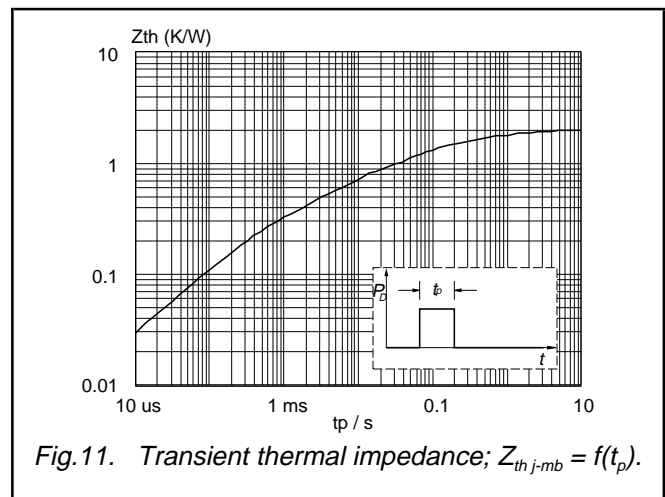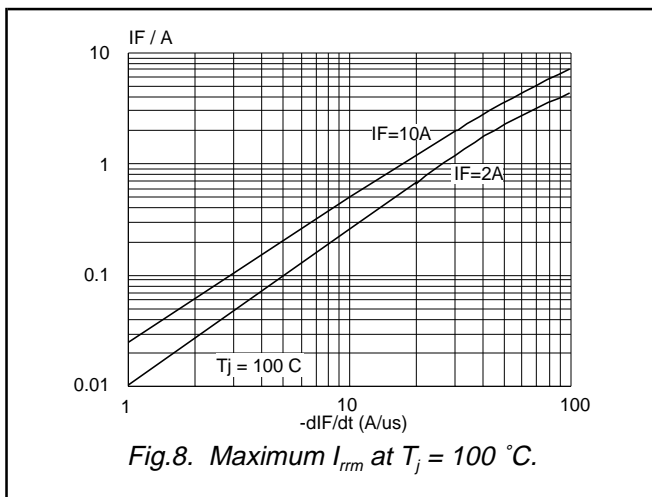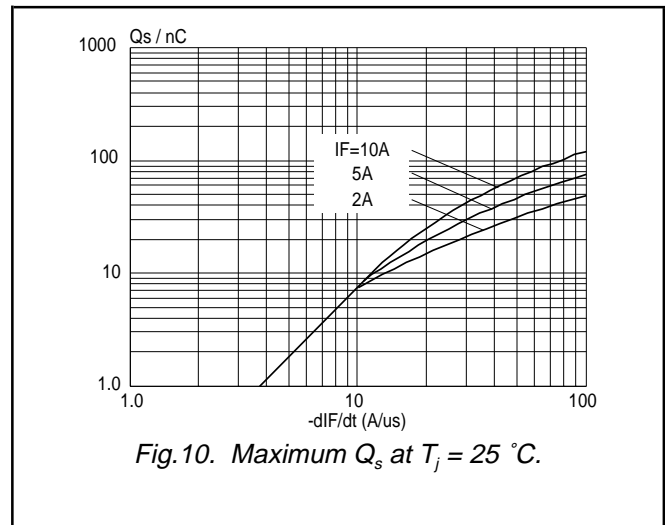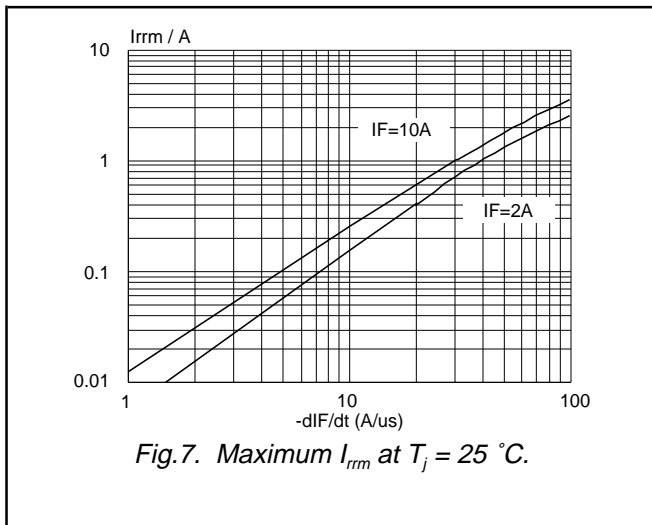

Rectifier diodes  
ultrafast

BYV79 series

**MECHANICAL DATA**

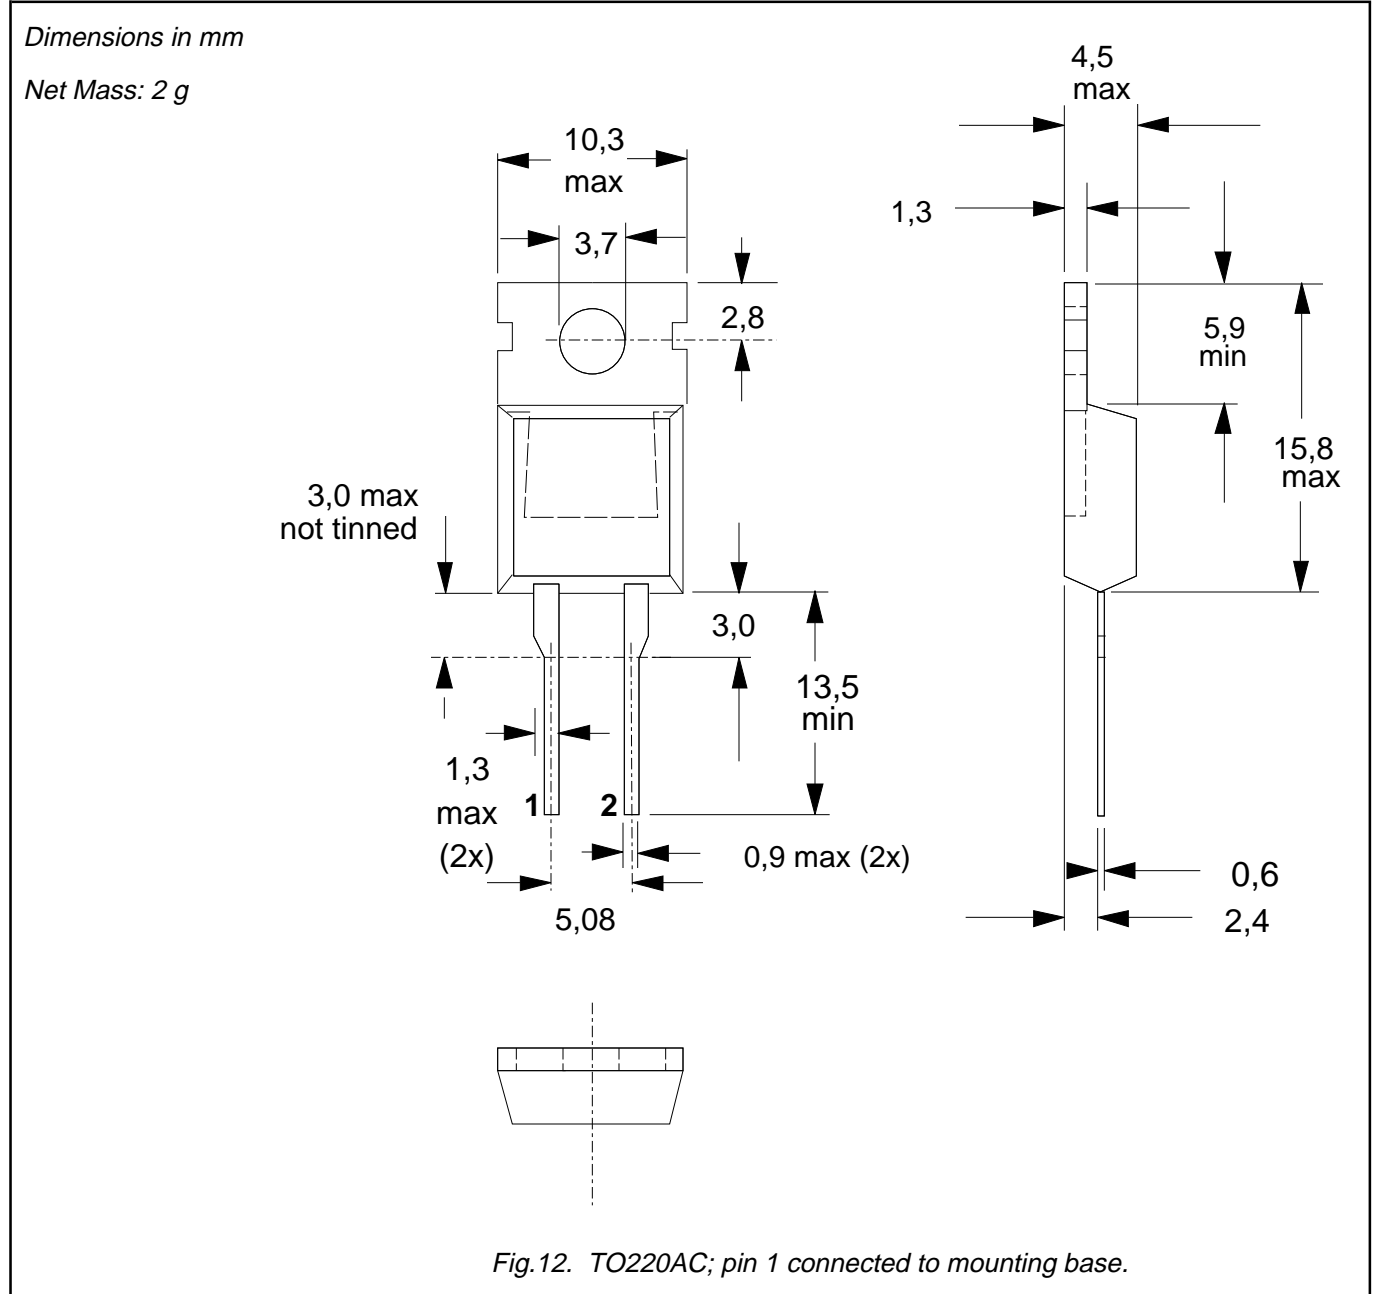

**Notes**

- 1. Accessories supplied on request: refer to mounting instructions for TO220 envelopes.
- 2. Epoxy meets UL94 V0 at 1/8".

---

**Rectifier diodes  
ultrafast**


---

**BYV79 series****DEFINITIONS**

<b>Data sheet status</b>	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
<b>Limiting values</b>	
Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
<b>Application information</b>	
Where application information is given, it is advisory and does not form part of the specification.	
<b>© Philips Electronics N.V. 1994</b>	
All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.	
The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.	

**LIFE SUPPORT APPLICATIONS**

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.