


25.101. *




Material
 Insulator:PVC
 Body:Brass
 Surface:Gold plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.6A

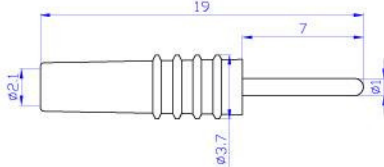

25.204. *




Material
 Insulator:PE
 Body:Brass
 Surface:Nickel plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.10A

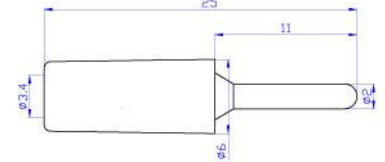

25.201. *




Material
 Insulator:PVC
 Body:Brass
 Spring:Beryllium copper
 Surface:Gold plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.10A

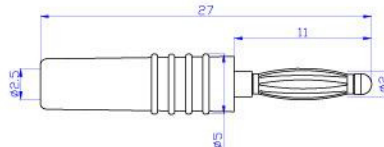

25.205. *




Material
 Insulator:PVC
 Body:Brass
 Spring:Beryllium copper
 Surface:Gold plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.10A

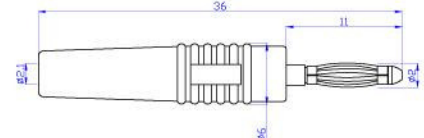

25.202. *




Material
 Insulator:PE
 Body:Brass
 Spring:Beryllium copper
 Surface:Gold plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.12A



25.206. *




Material
 Insulator:PE
 Body:Brass
 Spring:Beryllium copper
 Surface:Gold plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.10A

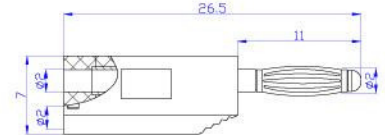

25.203. *




Material
 Insulator:PE
 Body:Brass
 Spring:Beryllium copper
 Surface:Gold plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.10A



25.207. *




Material
 Insulator:PE
 Body:Brass
 Spring:Beryllium copper
 Surface:Gold plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.10A

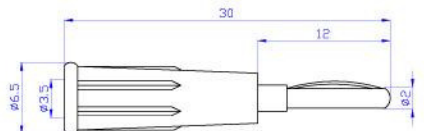

25.208. *




Material
 Insulator:PA
 Body:Brass
 Spring:Beryllium copper
 Surface:Nickel plated
 *Solder connection
Rated voltage/current
 CATII 600V/Max.10A

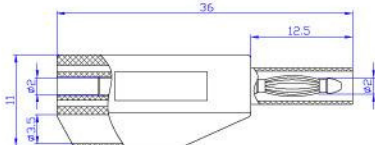

25.410. *




Material
 Insulator:PVC
 Body:Brass
 Spring:Steel
 Surface:Nickel plated
 *Screw connection
Rated voltage/current
 30Vac-60Vdc/Max.24A

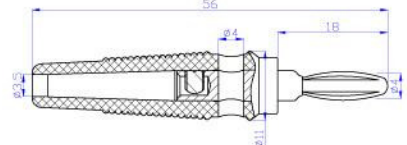

25.401. *




Material
 Insulator:ABS
 Body:Brass
 Spring:Beryllium copper
 Surface:Nickel plated
 *Screw connection
Rated voltage/current
 30Vac-60Vdc/Max.24A



25.411. *




Material
 Insulator:PVC
 Body:Brass
 Spring:Steel
 Surface:Nickel plated
 *Screw connection
Rated voltage/current
 30Vac-60Vdc/Max.24A

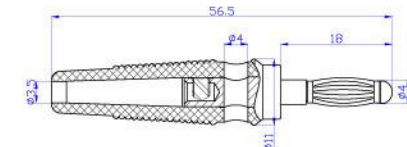

25.402. *




Material
 Insulator:ABS
 Body:Brass
 Spring:Phosphorus copper
 Surface:Nickel plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.19A

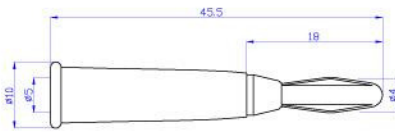

25.412. *




Material
 Insulator:PVC
 Body:Brass
 Spring:Beryllium copper
 Surface:Nickel plated
 *Screw connection
Rated voltage/current
 30Vac-60Vdc/Max.24A

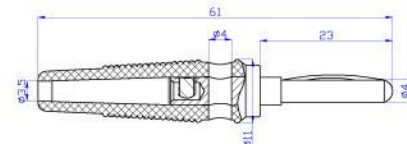

25.403. *




Material
 Insulator:PE
 Body:Brass
 Spring:Beryllium copper
 Surface:Nickel plated
 *Screw connection
Rated voltage/current
 30Vac-60Vdc/Max.32A

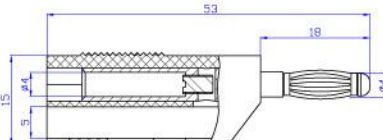

25.413. *




Material
 Insulator:PVC
 Body:Brass
 Spring:Phosphorus copper
 Surface:Nickel plated
 *Screw connection
Rated voltage/current
 30Vac-60Vdc/Max.32A

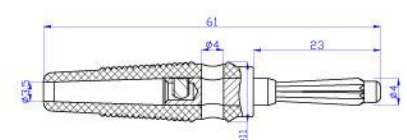

25.414. *




Material
 Insulator:PVC
 Body:Brass
 Surface:Nickel plated
 *Screw connection
Rated voltage/current
 30Vac-60Vdc/Max.32A

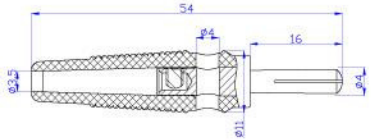

25.422. *




Material
 Insulator:PA
 Body:Brass
 Spring:Beryllium copper
 Surface:Gold plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.24A



25.415. *




Material
 Insulator:PVC
 Body:Brass
 Surface:Nickel plated
 *Screw connection
Rated voltage/current
 30Vac-60Vdc/Max.24A



25.425. *




Material
 Insulator:PE
 Body:Beryllium copper
 Spring:Beryllium copper
 Surface:Gold plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.19A



25.420. *




Material
 Insulator:ABS
 Body:Brass
 Surface:Nickel plated
 *Screw connection
Rated voltage/current
 30Vac-60Vdc/Max.24A

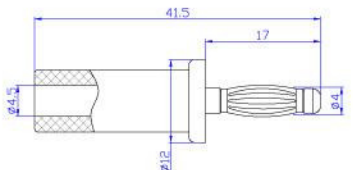

25.426. *




Material
 Insulator:PE
 Body:Brass
 Spring:Steel
 Surface:Nickel plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.19A

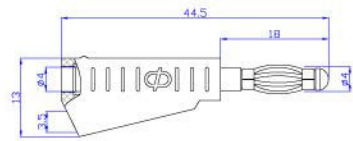

25.421. *




Material
 Insulator:ABS
 Body:Brass
 Surface:Nickel plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.24A

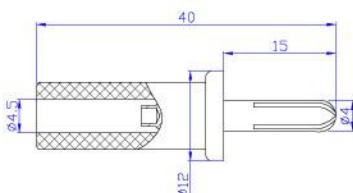

25.430. *




Material
 Insulator:PVC
 Body:Brass
 Surface:Nickel plated
 *Screw connection
Rated voltage/current
 30Vac-60Vdc/Max.24A

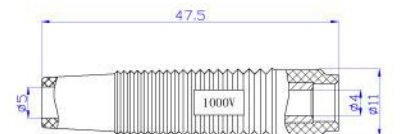

25.431. *




Material
 Insulator:PA
 Body: Brass
 Surface: Nickel plated
 *Solder connection
Rated voltage/current
 30Vac-60Vdc/Max.24A



25.502. *




Material
 Insulator:PA
 Body: Brass
 Spring: Beryllium copper
 Surface: Nickel plated
 *Solder connection
Rated voltage/current
 CATII 1000V/Max.32A



25.450. *




Material
 Insulator:PA
 Body: Brass
 Spring: Beryllium copper
 Surface: Nickel plated
 *Solder connection
Rated voltage/current
 CATII 600V/Max.32A

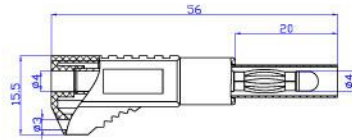

25.503. *




Material
 Insulator:PA
 Body: Brass
 Spring: Beryllium copper
 Surface: Nickel plated
 *Solder connection
Rated voltage/current
 CATII 1000V/Max.32A

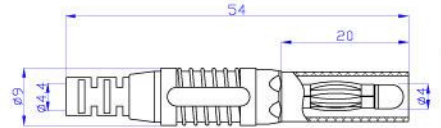

25.451. *




Material
 Insulator:PA
 Body: Brass
 Spring: Beryllium copper
 Surface: Nickel plated
 *Press connection
Rated voltage/current
 30Vac-60Vdc/Max.32A

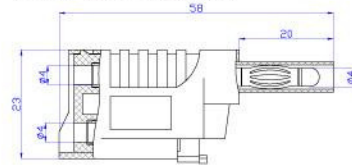

25.504. *




Material
 Insulator:PA
 Body: Brass
 Spring: Beryllium copper
 Surface: Nickel plated
 *Solder connection
Rated voltage/current
 CATII 1000V/Max.32A



25.501. *



Material
 Insulator:PA
 Body: Brass
 Spring: Beryllium copper
 Surface: Nickel plated
 *Solder connection
Rated voltage/current
 CATII 600V/Max.32A

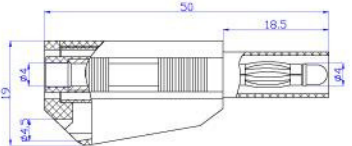

25.505. *



Material
 Insulator:PA
 Body: Brass
 Surface: Nickel plated
 *Solder connection
Rated voltage/current
 CATII 600V/Max.19A

