




ROBERT STĘPIEŃ  
HURTOWNIA CZĘŚCI ELEKTRONICZNYCH  
podzespoly-elektroniczne.pl

# Przełącznik klawiszowy H8553VBBR301

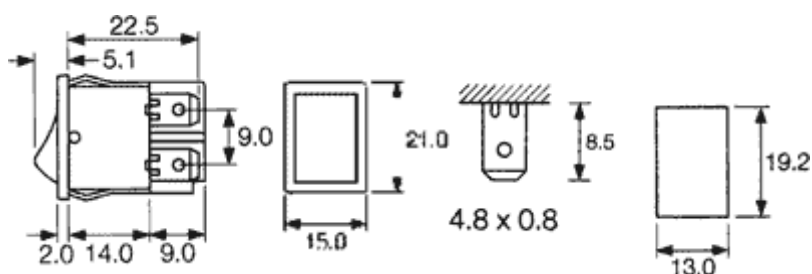

## Dane techniczne:

Rodzaj przełącznika: klawiszowy (kołyskowy)

4-PIN

2 pozycje ON-OFF

2 tory

Kolor elementu wykonawczego: czerwony

Typ przełącznika: bistabilny

Montaż mechaniczny: na panel

Wyprowadzenia: konektory 4,8x0,8mm

Otwór montażowy / raster: 12,9x19mm

Prąd styków AC: 10A

Napięcie przełączania AC: 250V AC

Kolor korpusu: czarny

Głębokość montażowa: 23mm

[www.podzespoly-elektroniczne.pl](http://www.podzespoly-elektroniczne.pl)

Robert Stępień Hurtownia Części Elektronicznych; Adres: ul. Wolumen 2, pawilon 71; 01-912 Warszawa; tel.: 601 296 402 / sklep@podzespoly-elektroniczne.pl

# 8500 Rocker Switches - Miniature 10A 250Vac Single & Double Pole



- ▶ Miniature rocker switch
- ▶ Ratings up to 15A, 250Vac
- ▶ High inrush tolerance
- ▶ Single & double pole in same body size
- ▶ Illuminated & non-illuminated
- ▶ Matching indicators
- ▶ Industry standard panel cut-out
- ▶ Rotary and push button accessories
- ▶ Panel cut out: 19.3 x 12.9



**10(6)A 250Vac T125** (non lit types)  
**6(4)A 250Vac T125 5E4 (50,000 Operations)** (non lit types)  
**10(6)A 250Vac T100** (lit types)



**UL CSA 15A Non Ind 250Vac, 14A Ind 250Vac, 10A 277Vac**  
**UL CSA 250Vac 1/2hp, 125Vac 1/4hp**  
**UL 105°C, file E45221, CSA file LR10990**

In house test

**Inrush 85A to EN61058-1 & 10A 24Vdc**



**RoHS compliant**

3mm contact gap.  
 Technical data on pages 4 & 5 (switches), 6 (indicators).

**H 8550 V B ---**  
 TERMINAL FUNCTION ROCKER BODY PRINT, COLOUR, VOLTAGE ETC

TERMINAL	FUNCTION	ROCKER
<b>H</b>  4.8 x 0.8 8.5	Approvals & ratings vary with function  ON OFF Switches are ON when pressed over terminal 1	<b>H</b> Slotted for custom adaptors  Slots for snap-in buttons
<b>K</b>  2.6 1.5 2.8 x 0.8 8.5	<b>8500</b>  ON - OFF Single pole (Uses terminals 1a & 2a)	<b>R</b> Semi-rotary (not lit) 
<b>L</b>  3.2 2.6 2.8 x 0.8 Right angle version of K terminal available on 8500 only	<b>8503</b>  ON (lit) - OFF Single pole	<b>D</b> Paddle lever (not lit) 
<b>R</b>  1.5 3.1 4.8 x 0.8 4.5	<b>8550</b>  ON - OFF Double pole	<b>V</b> Curved (not lit) 
<b>T</b>  R1.0 R0.8 3.5 8.5 Solder	<b>8553</b>  ON (lit) - OFF Double pole	<b>V</b> Curved (lit) 
	<b>8580</b> Available with H terminals only  Indicator 	<b>X</b> Two colour (not lit) 
		<b>A</b> Softline lens 
		<b>P</b> Push button operation (8500 only) See drawing opposite



H8500VB ---  
T8500VB ---



H8550VB ---  
T8550VB ---



H8550HB ---  
T8550HB ---



H8550XB ---  
T8550XB ---



H8550RB Semi-rotary  
A splash proofing option



H8500PO ---  
Pushbutton option




H8553VB ---  
T8553VB ---




H8580AB ---

## BODY

**B**  
Standard body with terminal barrier

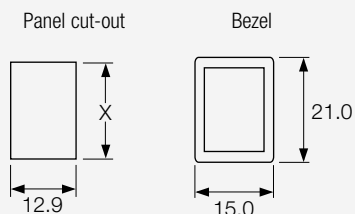

**BC**  
Body without terminal barrier

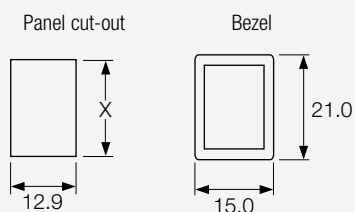

Dimensions for snap-in fixing

Panel thickness	Dim X
0.75-1.25	19.1/19.2
1.25-2.00	19.3/19.4
2.00-3.00	19.7/19.8

Cut-outs must be punched in the direction of insertion

## OPTIONS

**Finish**  
Matt finish only.

**Colour**  
Call sales for custom colours.  
A full range is available for large orders.



**Legend printing**  
Select from the examples or call sales for custom legends.

**Lamp voltage**  
Call sales for details of available voltages.

**Protective cover L167**  
(designed to IP65)  
Snaps on to bodies with V or X style rockers and A style lens, this reduces maximum acceptable panel thickness to 2.2mm.



## DIMENSIONS (mm)

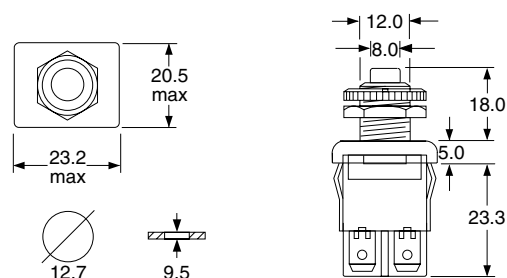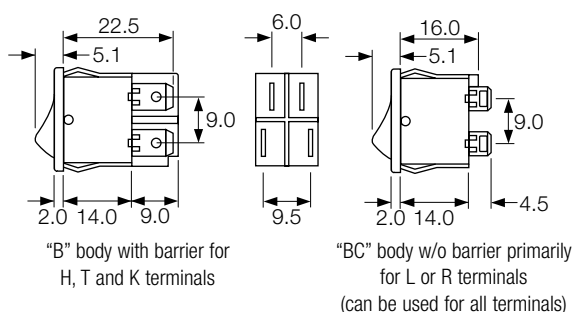


'PO' Actuator and body - push button function (8500 only)

## Examples of printing



CL076



CL080