



## TO-92 Encapsulate Three-terminal voltage regulator

### LM79L06 Three-terminal negative voltage regulator

#### FEATURES

Maximum Output current


$I_{OM}$ : 0.1 A

Output voltage

$V_o$ : -6 V

Continuous total dissipation

$P_D$ : 0.625 W

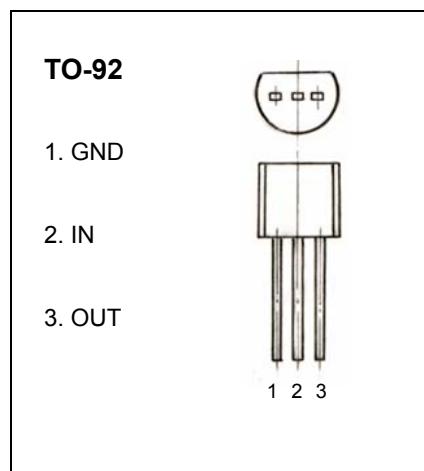


#### ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Units
Input Voltage	$V_i$	-30	V
Operating Junction Temperature Range	$T_{OPR}$	0~+125	°C
Storage Temperature Range	$T_{STG}$	-55~+150	°C

#### ELECTRICAL CHARACTERISTICS ( $V_i=-11V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT	
Output voltage	$V_o$	25°C	-5.75	-6.0	-6.25	V	
		-8V≤ $V_i$ ≤-20V, $I_o=1mA\sim40mA$	0-125°C	-5.7	-6.0	-6.3	V
		$I_o=1mA\sim70mA$		-5.7	-6.0	-6.3	V
Load Regulation	$\Delta V_o$	$I_o=1mA\sim100mA$	25°C	21	80	mV	
		$I_o=1mA\sim40mA$	25°C	11	40	mV	
Line regulation	$\Delta V_o$	-8V≤ $V_i$ ≤-20V	25°C	20	175	mV	
		-9V≤ $V_i$ ≤-20V	25°C	15	125	mV	
Quiescent Current	$I_q$		25°C	3.9	6.0	mA	
Quiescent Current Change	$\Delta I_q$	-9V≤ $V_i$ ≤-20V	0-125°C		1.5	mA	
	$\Delta I_q$	1mA≤ $V_i$ ≤40mA	0-125°C		0.1	mA	
Output Noise Voltage	$V_N$	10Hz≤f≤100KHz	25°C	44		uV	
Ripple Rejection	RR	-9V≤ $V_i$ ≤-19V, f=120HZ	0-125°C	40	48	dB	
Dropout Voltage	$V_d$		25°C	1.7		V	

#### TYPICAL APPLICATION

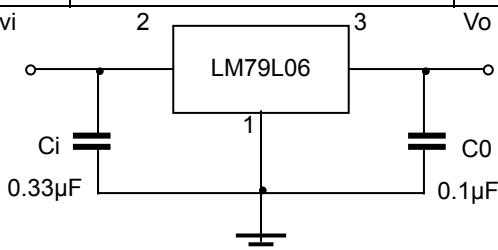

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close possible to the regulators.

## Typical Characteristics

L M79LXX

