



ROBERT STĘPIEŃ
HURTOWNIA CZĘŚCI ELEKTRONICZNYCH
podzespoly-elektroniczne.pl

Mostek GBJ1510;YY;(15A;1000V)płaski prostowniczy;RoHS



Dane techniczne:

Nazwa: GBJ1510

Typ elementu półprzewodnikowego: mostek prostowniczy

Napięcie wsteczne maksymalne: 1000V

Prąd przewodzenia: 15A

Wersja: płaski

Montaż elektryczny: THT

www.podzespoly-elektroniczne.pl

Robert Stępień Hurtownia Części Elektronicznych; Adres: ul. Wolumen 2, pawilon 71; 01-912 Warszawa; tel.: 601 296 402 /
sklep@podzespoly-elektroniczne.pl


GBJ/KBJ15005 THRU GBJ/KBJ1510

SINGLE PHASE 15AMPS.
GLASS PASSIVATED BRIDGE
RECTIFIERS

Voltage Range
50 to 1000 Volts
Current
15 Amperes

FEATURES

- *UL Recognized File # 230084
- *Rating to 1000V PRV
- *Ideal for printed circuit board
- *Low forward voltage drop, high current capability
- *Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- *The Plastic material has UL flammability classification 94 V-0

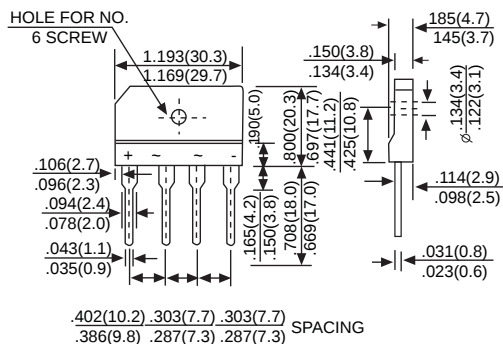

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 50Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Type Number		GBJ KBJ 15005	GBJ KBJ 1501	GBJ KBJ 1502	GBJ KBJ 1504	GBJ KBJ 1506	GBJ KBJ 1508	GBJ KBJ 1510	UNITS
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current@T _c = 100°C (without heatsink)	I _{F(AV)}	15.0 3.2							A
Peak Forward Surge Current 8.3ms single half sine-wave super imposed on rated load(JEDEC Method)	I _{FSM}	240							A
Maximum Instantaneous Forward Voltage Drop Per Leg@7.5A	V _F	1.05							V
Maximun DC Reverse Current at Rated DC Blocking Voltage T _J = 25°C T _J = 125°C	I _R	10 500							uA
I ² t Rating for fusing (t<8.3ms)	I ² t	240							A²S
Typical Junction Capacitance per Leg(Note 1)	C _J	60							pF
Typical Thermal Resistance(Note 2)	R _{θC}	0.8							°C/W
Operating Temperature Range	T _J	-55 to+150							°C
Storage Temperature Range	T _{STG}	-55 to+150							°C

NOTES: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2. Device mounted on 300mm x 300mm x 1.6mm Cu Plate Heatsink.

RATING AND CHARACTERISTIC CURVES

GBJ/KBJ15005 THRU GBJ/KBJ1510

FIG.1 - FORWARD CURRENT DERATING CURVE

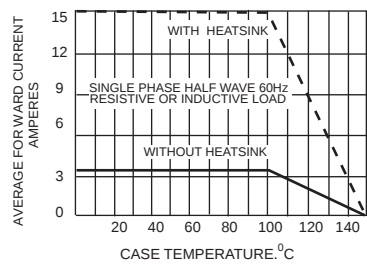


FIG.2-MAXIMUM NON-REPETITIVE SURGE CURRENT

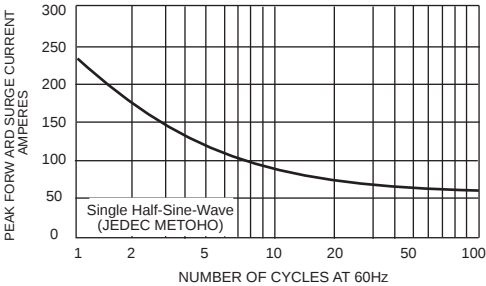


FIG.3 - TYPICAL JUNCTION CAPACITANCE

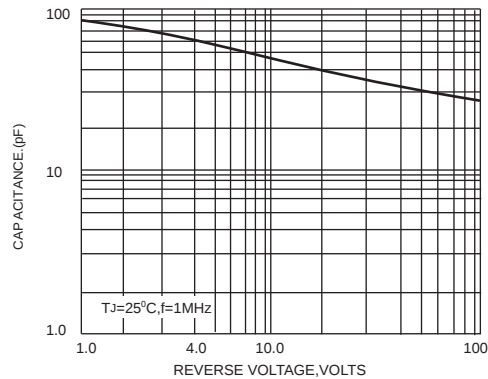


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

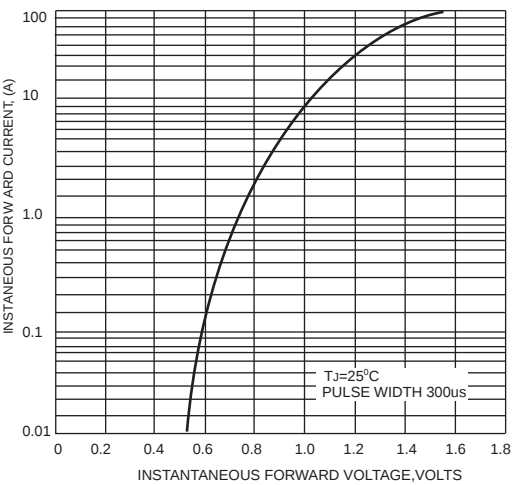


FIG.5-TYPICAL REVERSE CHARACTERISTICS

