



Złącze EDK-5.08-02P-4S;2-tory;RoHS R=5.08mm;15A/300V;na przewód 2.5mm²



Dane techniczne:

Nazwa: EDK-5.08-02P-4S

Typ łączówki: rozłączna ARK

Liczba torów: 2 tory

Raster wyprowadzeń: R=5,08mm

Wysokość: 17,4mm

Prąd znamionowy: 15A

Napięcie znamionowe: 300V

Montaż złącza: na przewód

Orientacja złącza: kątowne 90°

Rodzaj śruby: śruba prosta

Montaż przewodu: śrubowy; pionowy

Przekrój przewodu: 2,5mm²

Kolor: zielony

Certyfikaty: RoHS

TERMINAL BLOCK Connector



Pluggable Series

KLS2-EDK-5.00/5.08 Series Pitch=5.00mm/5.08mm

Electrical :


Rated voltage: 300V
 Rated current: 15A
 Contact resistance: 20mΩ
 Insulation resistance: 5000MΩ/DC1000V
 Withstanding Voltage: AC2000V/1Min
 Wire range: 28-12AWG 2.5mm²

Material

Contact: Phosphor bronze
 Screws: M2.5, steel, Zinc plated
 Housing: PA66, UL94V-0

Mechanical

Temp. Range: -40°C~+105°C
 Torque: 0.4Nm(3.6Lb.in)
 Strip length: 7-8mm

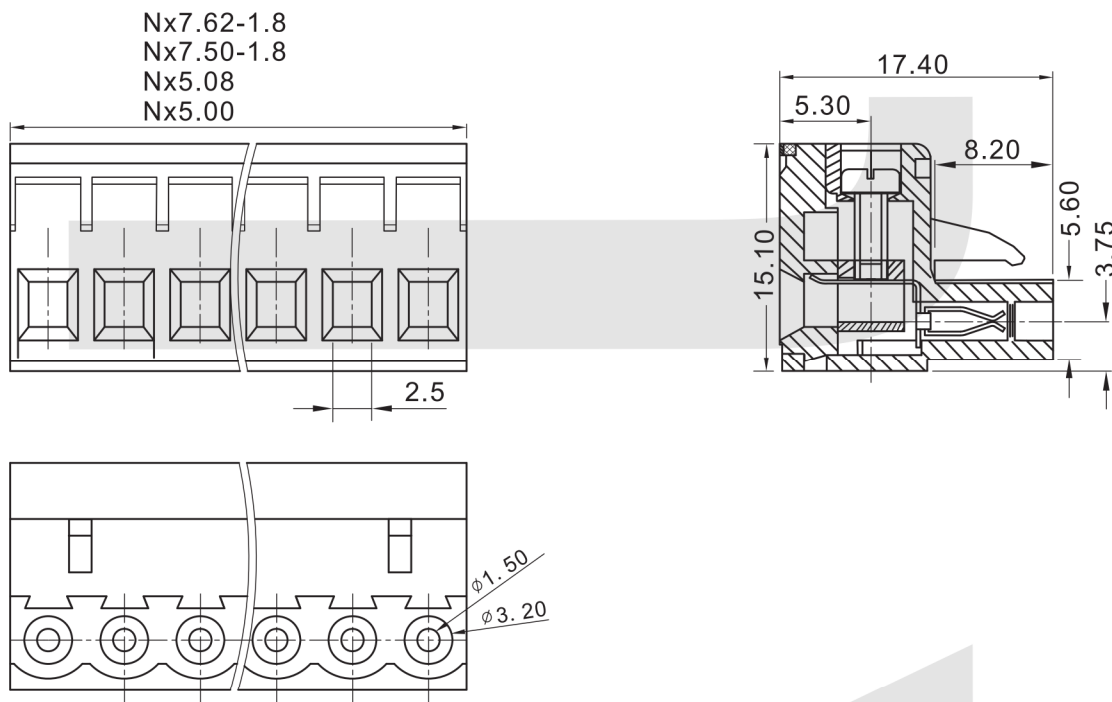

ORDER INFORMATION

Product NO.: KLS2-EDK-5.00-XXP X X X

Pos. NO.	Customer Request
Series No.	Screw: C=Cross Screw S=Slot Screw
Pitch 5.00=5.00mm 5.08=5.08mm	Color: 1=Gray 2=Blue 3=Black
7.50=7.50mm 7.62=7.62mm	4=Green 5=Orange 6=Red
Number of Pole	7=Transparent 8=Yellow 9=White