




ROBERT STĘPIEŃ
HURTOWNIA CZĘŚCI ELEKTRONICZNYCH
podzespoly-elektroniczne.pl

Dioda LED SMD 0603 niebieska

OLNS.03w0070/HL-PST-1608H198BC

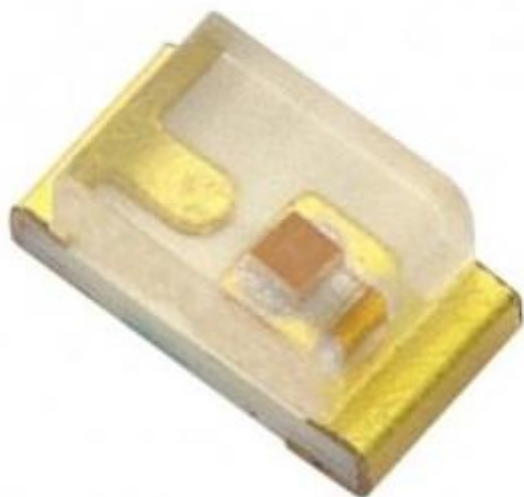

Dane techniczne:

Nazwa: OLNS.03w0070/HL-PST-1608H198BC

Prąd diody LED: 5mA


Napięcie diody LED: 3.2V

Jasność: 80mcd

Kolor diody LED: niebieski

Kąt świecenia: 120°

Długość fali: 470nm

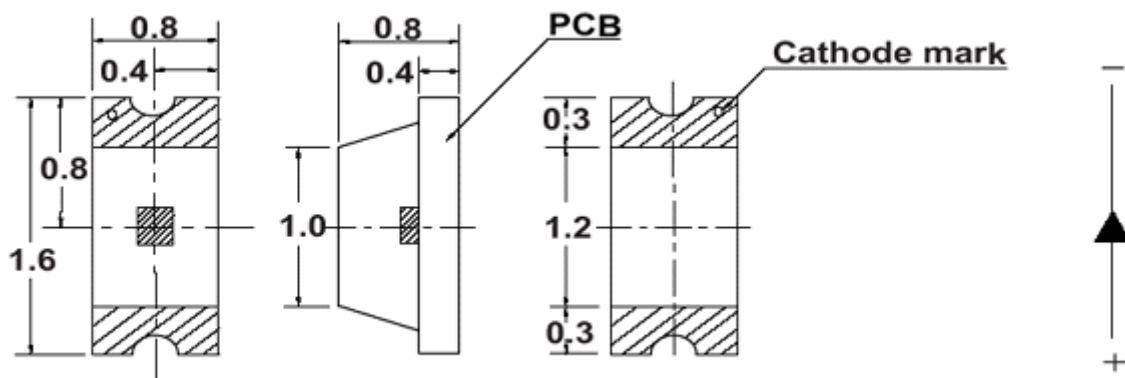

www.podzespoly-elektroniczne.pl


Robert Stępień Hurtownia Części Elektronicznych; Adres: ul. Wolumen 2, pawilon 71; 01-912 Warszawa; tel.: 601 296 402 / sklep@podzespoly-elektroniczne.pl



ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES

HL-PST-1608H198BC

BLUE



Features

- 0603 pack.
- Low power consumption.
- Wide viewing angle.
- Compatible with infrared and vapor phase reflow solder process.
- Package: 4000pcs/ reel .


Description

This devices are made TS InGaN.

Applications

- Indicator and backlighting in telephone and fax.
- Flat backlight for LCD.
- Switch and symbol.
- General use.

Package Dimensions

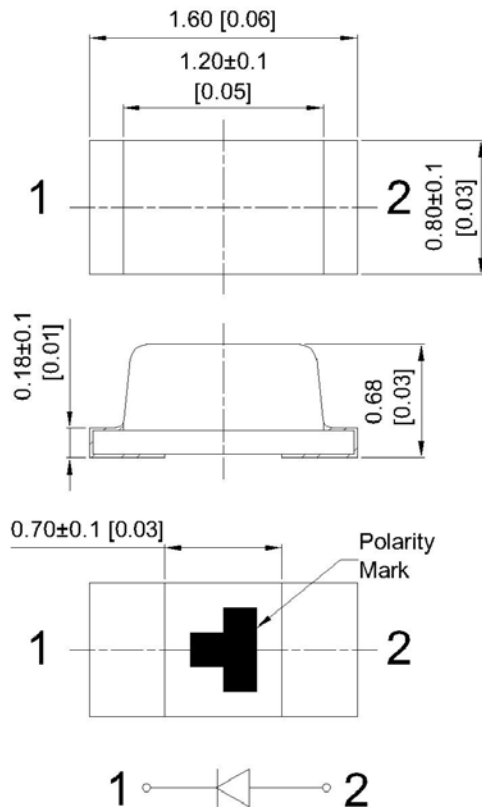

Notes:

1. All dimension units are millimeters.
2. All dimension tolerance is ±0.2mm unless otherwise noted.

Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) @ 5mA		Viewing Angle
			Min.	Typ.	2θ1/2
HL-PST-1608H198BC	BLUE (GaN)	WATER CLEAR	55	80	120°

Note:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
2. Tolerance of luminous Intensity ±10%.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Min.	Typ.	Units	Test Conditions
λD	Dominate Wavelength	Blue	465	470	nm	IF=5mA
C	Capacitance	Blue		110	pF	VF=0V; f=1MHz
VF	Forward Voltage	Blue	3.0	3.2	V	IF=5mA
IR	Reverse Current	Blue		5	uA	VR = 5V

Absolute Maximum Ratings at TA=25°C

Parameter	Blue	Units
Power dissipation	54	mW
DC Forward Current	15	mA
Peak Forward Current [1]	100	mA
Reverse Voltage	5	V
Operating Temperature	-40°C To +85°C	
Storage Temperature	-40°C To +100°C	

Note:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

Blue
HL-PST-1608H198BC
Reliability Test Items And Conditions







The reliability of products shall be satisfied with items listed below.

Confidence level :90%

LTPD :10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Rc
1	Reflow	Temp:260℃max T=5 sec max.	1times.	22Pcs.	0/1
2	Temperature Cycle	100℃±5℃ 30 min. ↑↓5 min -40℃±5℃ 30 min.	100 Cycles	22Pcs.	0/1
3	Thermal Shock	100℃±5℃ 5 min. ↑↓ -40℃±5℃ 5 min.	100 Cycles	22Pcs.	0/1
4	High Temperature Storage	Temp.:100℃±5℃	1000Hrs.	22Pcs.	0/1
5	Low Temperature Storage	Temp.: -40℃±5℃	1000Hrs.	22Pcs.	0/1
6	DC Operating Life	Ta=25℃±5℃ IF=15mA	1000Hrs.	22Pcs.	0/1
7	High Temperature/High Humidity	85℃±5℃/ 85%RH IF=2.5mA	1000Hrs.	22Pcs.	0/1


*The technical information shown in the data sheets are limited to the typical characteristics and circuit examples of the referenced products. It does not constitute the warranting of industrial property nor the granting of any license.

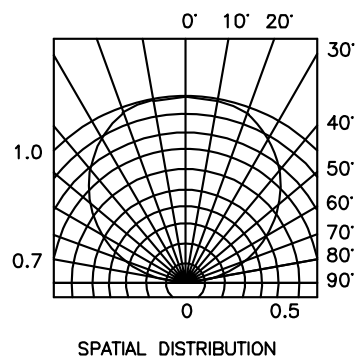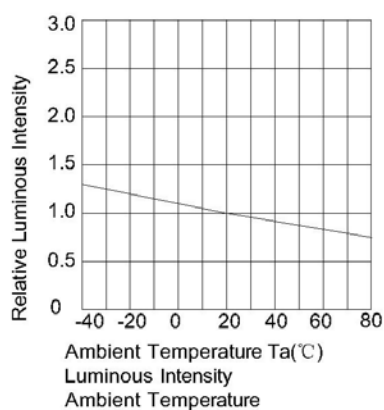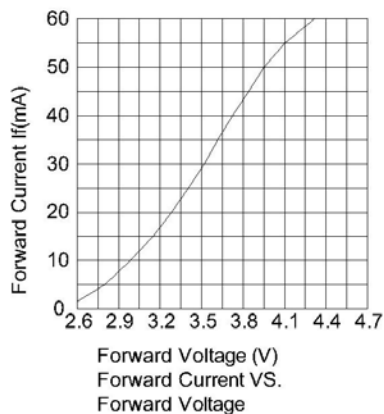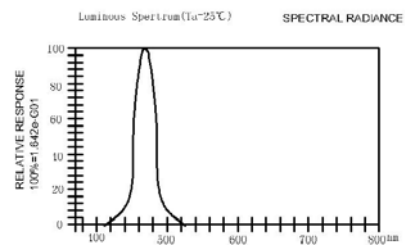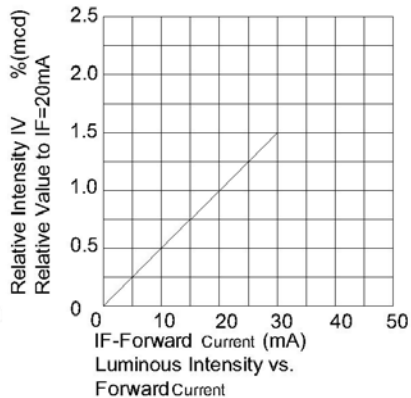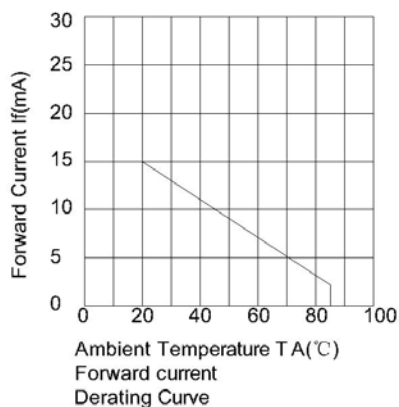


HL-PST-1608H198BC

SMT Reflow Soldering Instructions

Number of reflow process shall be less than 2 times and cooling process to normal temperature is required between first and second soldering process.

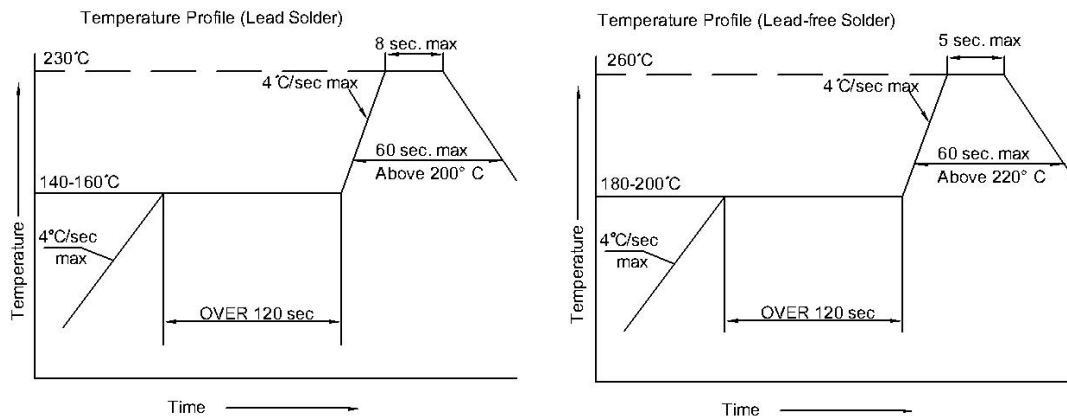

Recommended Soldering Pattern (Units : mm)

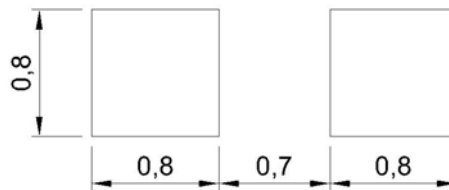

Tape Specifications (Units : mm)

