




Złącze AK500/2DS-5.0-V 2 PIN RoHS rozstaw 5mm

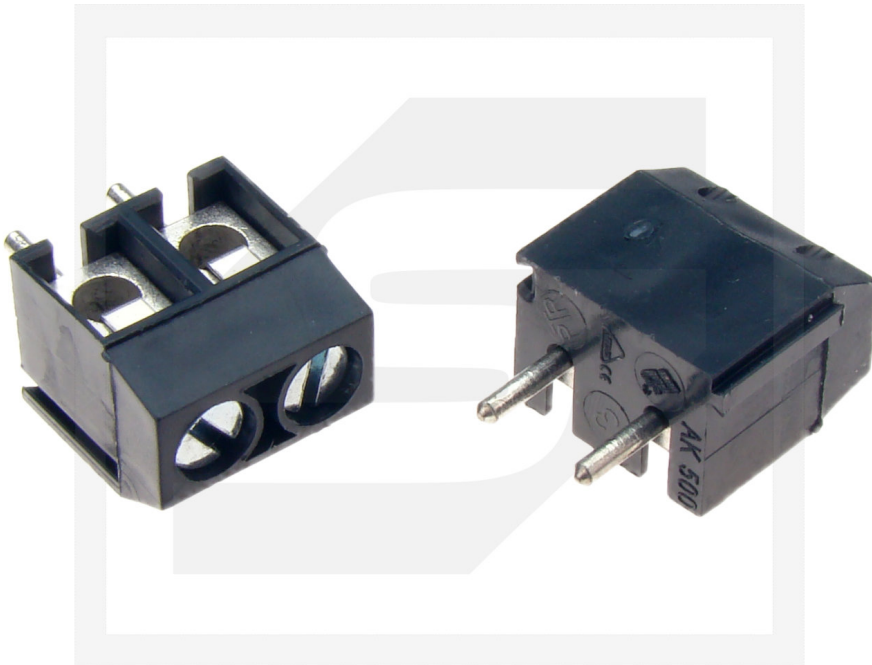

Dane techniczne:

Nazwa: AK500/2DS-5.0-V

Liczba pinów: 2

Raster: 5mm

Zacisk: śrubowy, docisk

Przekrój przewodu: 0.2...1.5mm²

Prąd znamionowy: 24A

Napięcie znamionowe: 250V

Szerokość złącza: 10,6mm

Materiał tworzywa: PA66

Materiał styku: stop miedzi

Producent: PTR MESSTECHNIK

Certyfikat: RoHS


www.podzespoly-elektroniczne.pl



PTR

A Phoenix Mecano Company

AK(Z) 500 VERTICAL

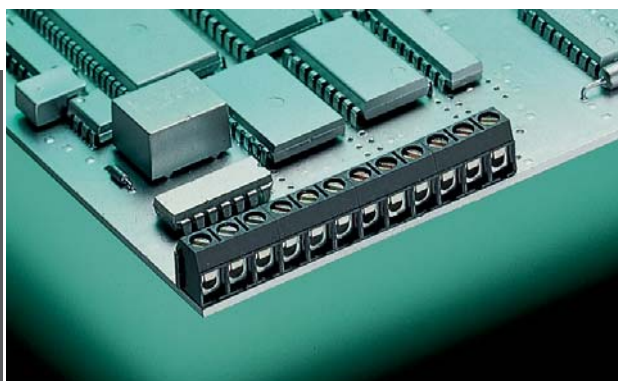


AK(Z) 500/.. DS - 5.0 (5.08) - V - GREY

**2-12 poles, Spacing 5,0 mm or 5,08 mm
insert required no. of poles ..**

How to order see page 11

AK(Z) 500 HORIZONTAL

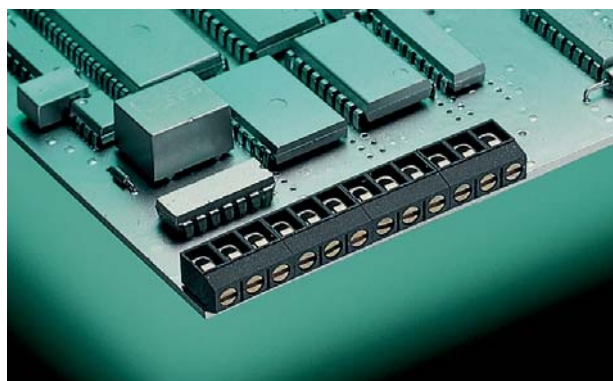

AK(Z) 500/.. DS - 5.0 (5.08) - H - GREY

**2-12 poles, Spacing 5,0 mm or 5,08 mm
insert required no. of poles ..**

How to order see page 11

Ratings:



Rated voltage	300 V	250 V
Rated current	15 A	17,5 A (T60)
Wire Size	AWG 22-14	1,5 mm ²
Test voltage		2,0 kV
Rated Torque / Screw Size		0,4 Nm/M2,6

Max. Rated Cross Section

Single Wire (solid)	1,5 mm ²
Stranded Wire (flexible)	1,5 mm ²
Stranded wire with Ferrules	0,75 mm ²

Dimensions

Spacing	5,0 mm (5,08 mm)
PCB hole diameter	1,3 mm
Stripped length	6,0 mm

Materials

Insulating material	PA
Flammability class	UL94 V-0
Temperature range	-30°C/+105°C
Terminal block	CuZn
Wire guard	stainless steel
Colour	grey
	RAL 7016

Ratings:



Rated voltage	300 V	250 V
Rated current	15 A	17,5 A (T60)
Wire Size	AWG 22-14	1,5 mm ²
Test voltage		2,0 kV
Rated Torque / Screw Size		0,4 Nm/M2,6

Max. Rated Cross Section

Single Wire (solid)	1,5 mm ²
Stranded Wire (flexible)	1,5 mm ²
Stranded wire with Ferrules	0,75 mm ²


Dimensions

Spacing	5,0 mm (5,08 mm)
PCB hole diameter	1,3 mm
Stripped length	5,0 mm

Materials

Insulating material	PA
Flammability class	UL94 V-0
Temperature range	-30°C/+105°C
Terminal block	CuZn
Wire guard	stainless steel
Colour	grey
	RAL 7016

AK(Z) 500 VERTICAL

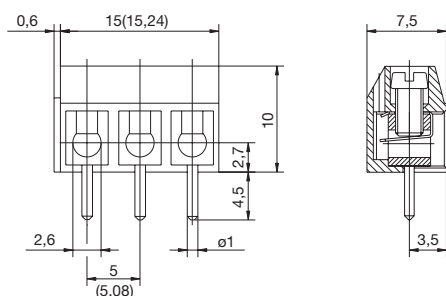

AK(Z) 500 HORIZONTAL

