74HC373; 74HCT373

Octal D-type transparent latch; 3-state

Rev. 7 — 22 July 2020

Product data sheet

1. General description

The 74HC373; 74HCT373 is an octal D-type transparent latch with 3-state outputs. The device features latch enable (LE) and output enable ($\overline{\text{OE}}$) inputs. When LE is HIGH, data at the inputs enter the latches. In this condition the latches are transparent, a latch output will change each time its corresponding D-input changes. When LE is LOW the latches store the information that was present at the inputs a set-up time preceding the HIGH-to-LOW transition of LE. A HIGH on $\overline{\text{OE}}$ causes the outputs to assume a high-impedance OFF-state. Operation of the $\overline{\text{OE}}$ input does not affect the state of the latches. Inputs include clamp diodes. This enables the use of current limiting resistors to interface inputs to voltages in excess of V_{CC} .

2. Features and benefits

- Wide supply voltage range from 2.0 V to 6.0 V
- CMOS low power dissipation
- · High noise immunity
- · Latch-up performance exceeds 100 mA per JESD 78 Class II Level B
- Complies with JEDEC standards:
 - JESD8C (2.7 V to 3.6 V)
 - JESD7A (2.0 V to 6.0 V)
- Input levels:
 - For 74HC373: CMOS level
 - For 74HCT373: TTL level
- 3-state non-inverting outputs for bus oriented applications
- · Common 3-state output enable input
- ESD protection:
 - HBM JESD22-A114F exceeds 2000 V
 - MM JESD22-A115-A exceeds 200 V
- Multiple package options
- Specified from -40 °C to +85 °C and from -40 °C to +125 °C





3. Ordering information


Table 1. Ordering information

Type number	Package			
	Temperature range	Name	Description	Version
74HC373D	-40 °C to +125 °C	SO20	plastic small outline package; 20 leads;	SOT163-1
74HCT373D			body width 7.5 mm	
74HC373DB	-40 °C to +125 °C	SSOP20	plastic shrink small outline package; 20 leads; body width 5.3 mm	SOT339-1
74HC373PW	-40 °C to +125 °C	TSSOP20	plastic thin shrink small outline package; 20 leads;	SOT360-1
74HCT373PW			body width 4.4 mm	
74HC373BQ	-40 °C to +125 °C	DHVQFN20	plastic dual in-line compatible thermal enhanced	SOT764-1
74HCT373BQ			very thin quad flat package; no leads; 20 terminals; body 2.5 × 4.5 × 0.85 mm	

4. Functional diagram

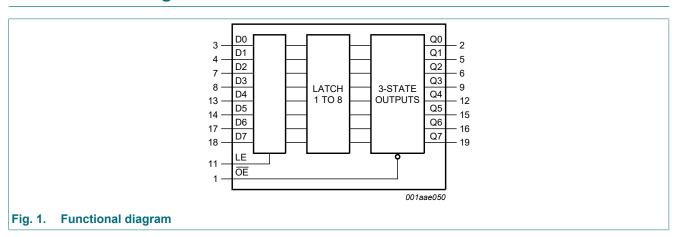

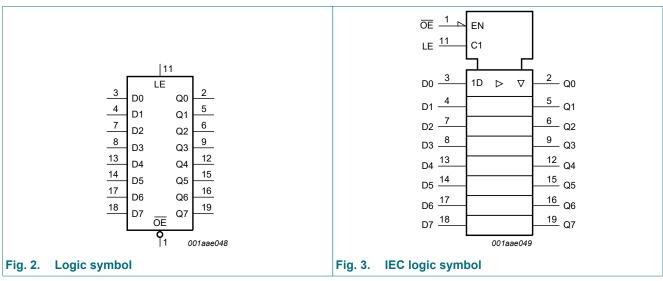

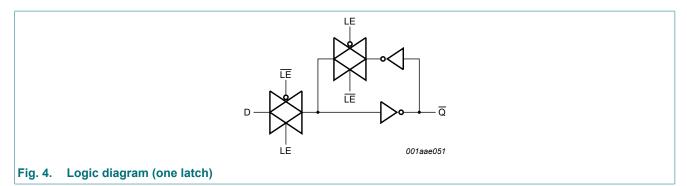


D0 D1 D2 D3 D5 D6 D7 D4 Q D $\bar{\mathsf{Q}}$ $\overline{\mathsf{Q}}$ Q Q ā $\overline{\mathsf{Q}}$ D ā D D D D D LATCH LATCH LATCH LATCH LATCH LATCH LATCH LATCH ĪĒ LE ĪĒ LE ĪĒ LE ĪĒ LE ĪĒ LE <u>ΓΕ</u> LE ĪĒ LE ĪĒ LE 001aae052

Fig. 5.

Logic diagram

5. Pinning information

5.1. Pinning

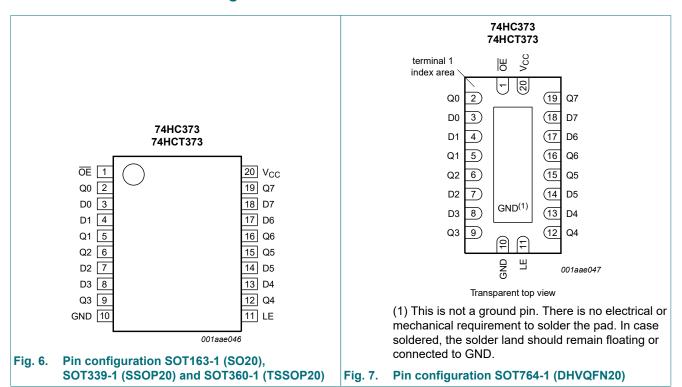

5.2. Pin description

Table 2. Pin description

Table 2. I ill description		
Symbol	Pin	Description
ŌE	1	3-state output enable input (active LOW)
Q0, Q1, Q2, Q3, Q4, Q5, Q6, Q7	2, 5, 6, 9, 12, 15, 16, 19	3-state latch output
D0, D1, D2, D3, D4, D5, D6, D7	3, 4, 7, 8, 13, 14, 17, 18	data input
GND	10	ground (0 V)
LE	11	latch enable input (active HIGH)
V _{CC}	20	supply voltage

6. Functional description

Table 3. Functional description

H = HIGH voltage level; h = HIGH voltage level one set-up time prior to the HIGH-to-LOW LE transition; L = LOW voltage level; I = LOW voltage level one set-up time prior to the HIGH-to-LOW LE transition; X = don't care; Z = high-impedance OFF-state.

Operating mode	Control		Input	Internal latches	Output
	OE	LE	Dn		Qn
Enable and read register	L	Н	L	L	L
(transparent mode)			Н	Н	Н
Latch and read register	L	L	I	L	L
			h	Н	Н
Latch register and disable outputs	Н	Х	Х	Х	Z

7. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Max	Unit
V _{CC}	supply voltage		-0.5	+7	V
I _{IK}	input clamping current	$V_{I} < -0.5 \text{ V or } V_{I} > V_{CC} + 0.5 \text{ V}$	-	±20	mA
lok	output clamping current	$V_{O} < -0.5 \text{ V or } V_{O} > V_{CC} + 0.5 \text{ V}$	-	±20	mA
Io	output current	$V_{O} = -0.5 \text{ V to } (V_{CC} + 0.5 \text{ V})$	-	±35	mA
I _{CC}	supply current		-	+70	mA
I_{GND}	ground current		-	-70	mA
T _{stg}	storage temperature		-65	+150	°C
P _{tot}	total power dissipation	[1]	-	500	mW

^[1] For SOT163-1 (SO20) package: P_{tot} derates linearly with 12.3 mW/K above 109 °C. For SOT339-1 (SSOP20) package: P_{tot} derates linearly with 10.0 mW/K above 100 °C. For SOT360-1 (TSSOP20) package: P_{tot} derates linearly with 10.0 mW/K above 100 °C. For SOT764-1 (DHVQFN20) package: P_{tot} derates linearly with 12.9 mW/K above 111 °C.

8. Recommended operating conditions

Table 5. Recommended operating conditions

Voltages are referenced to GND (ground = 0 V)

Symbol	Parameter	Conditions		74HC373	3	7	'4HCT37	3	Unit
			Min	Тур	Max	Min	Тур	Max	
V_{CC}	supply voltage		2.0	5.0	6.0	4.5	5.0	5.5	V
VI	input voltage		0	-	V _{CC}	0	-	V _{CC}	V
Vo	output voltage		0	-	V _{CC}	0	-	V _{CC}	V
T _{amb}	ambient temperature		-40	+25	+125	-40	+25	+125	°C
Δt/ΔV	input transition rise and fall rate	V _{CC} = 2.0 V	-	-	625	-	-	-	ns/V
		V _{CC} = 4.5 V	-	1.67	139	-	1.67	139	ns/V
		V _{CC} = 6.0 V	-	-	83	-	-	-	ns/V

9. Static characteristics

Table 6. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Tar	_{nb} = 25	°C		-40 °C 5 °C		-40 °C 25 °C	Unit
		$V_{CC} = 4.5 \text{ V}$ $V_{CC} = 6.0 \text{ V}$ $V_{CC} = 4.5 \text{ V}$ $V_{CC} = 4.5 \text{ V}$ $V_{CC} = 4.5 \text{ V}$ $V_{CC} = 6.0 \text{ V}$ $I_{O} = -20 \text{ µA; } V_{CC} = 2.0 \text{ V}$ $I_{O} = -20 \text{ µA; } V_{CC} = 2.0 \text{ V}$ $I_{O} = -20 \text{ µA; } V_{CC} = 4.5 \text{ V}$ $I_{O} = -20 \text{ µA; } V_{CC} = 6.0 \text{ V}$ $I_{O} = -6.0 \text{ mA; } V_{CC} = 6.0 \text{ V}$ $I_{O} = -7.8 \text{ mA; } V_{CC} = 6.0 \text{ V}$ $I_{O} = 20 \text{ µA; } V_{CC} = 6.0 \text{ V}$ $I_{O} = 20 \text{ µA; } V_{CC} = 2.0 \text{ V}$ $I_{O} = 20 \text{ µA; } V_{CC} = 6.0 \text{ V}$ $I_{O} = 20 \text{ µA; } V_{CC} = 6.0 \text{ V}$ $I_{O} = 6.0 \text{ mA; } V_{CC} = 6.0 \text{ V}$ $I_{O} = 7.8 \text{ mA; } V_{CC} = $	Min	Тур	Max	Min	Max	Min	Max	1
74HC37	3									
V _{IH}	HIGH-level input	V _{CC} = 2.0 V	1.5	1.2	-	1.5	-	1.5	-	V
	voltage	V _{CC} = 4.5 V	3.15	2.4	-	3.15	-	3.15	-	V
		V _{CC} = 6.0 V	4.2	3.2	-	4.2	-	4.2	-	V
V _{IL}	LOW-level input	V _{CC} = 2.0 V	-	0.8	0.5	-	0.5	-	0.5	V
	voltage	V _{CC} = 4.5 V	-	2.1	1.35	-	1.35	-	1.35	V
		V _{CC} = 6.0 V	-	2.8	1.8	-	1.8	-	1.8	V
V _{OH}	HIGH-level output	$V_I = V_{IH}$ or V_{IL}	_	-	-					
	voltage	I_{O} = -20 μ A; V_{CC} = 2.0 V	1.9	2.0	-	1.9	-	1.9	-	V
		I _O = -20 μA; V _{CC} = 4.5 V	4.4	4.5	-	4.4	-	4.4	-	V
		I_{O} = -20 μ A; V_{CC} = 6.0 V	5.9	6.0	-	5.9	-	5.9	-	V
		I _O = -6.0 mA; V _{CC} = 4.5 V	3.98	4.32	-	3.84	-	3.7	-	V
		I_{O} = -7.8 mA; V_{CC} = 6.0 V	5.48	5.81	-	5.34	-	5.2	-	V
V _{OL}	LOW-level output	$V_I = V_{IH}$ or V_{IL}								
	voltage	I _O = 20 μA; V _{CC} = 2.0 V	-	0	0.1	-	0.1	-	0.1	V
		I _O = 20 μA; V _{CC} = 4.5 V	-	0	0.1	-	0.1	-	0.1	V
		I _O = 20 μA; V _{CC} = 6.0 V	-	0	0.1	-	0.1	-	0.1	V
		I _O = 6.0 mA; V _{CC} = 4.5 V	-	0.15	0.26	-	0.33	-	0.4	V
		I _O = 7.8 mA; V _{CC} = 6.0 V	-	0.16	0.26	-	0.33	-	0.4	V
I _I	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 6.0 \text{ V}$	-	-	±0.1	-	±1.0	-	±1.0	μΑ
l _{OZ}	OFF-state output current		-	-	±0.5	-	±5.0	-	±10.0	μA
I _{CC}	supply current		-	-	8.0	-	80	-	160	μA
Cı	input capacitance		-	3.5	-	-	-	-	-	pF
74HCT3	73		•	•		•	•			
V _{IH}	HIGH-level input voltage	V _{CC} = 4.5 V to 5.5 V	2.0	1.6	-	2.0	-	2.0	-	V
V _{IL}	LOW-level input voltage	V _{CC} = 4.5 V to 5.5 V	-	1.2	8.0	-	0.8	-	0.8	V
V _{OH}	HIGH-level output	V _I = V _{IH} or V _{IL}								
	voltage	I _O = -20 μA; V _{CC} = 4.5 V	4.4	4.5	-	4.4	-	4.4	-	V
		I _O = -6.0 mA; V _{CC} = 4.5 V	3.98	4.32	-	3.84	-	3.7	-	V
V _{OL}	LOW-level output	V _I = V _{IH} or V _{IL}								
	voltage	I _O = 20 μA; V _{CC} = 4.5 V	-	0.0	0.1	-	0.1	-	0.1	V
		I _O = 6.0 mA; V _{CC} = 4.5 V	-	0.16	0.26	-	0.33	-	0.4	V
I _I	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 5.5 \text{ V}$	-	-	±0.1	-	±1.0	-	±1.0	μΑ

Symbol	Parameter	Conditions	T _{ar}	_{nb} = 25	°C	T _{amb} = -40 °C to 85 °C		T _{amb} = to 12	-40 °C 25 °C	Unit
			Min	Тур	Max	Min	Max	Min	Max	
l _{OZ}	OFF-state output current	$V_I = V_{IH}$ or V_{IL} ; $V_{CC} = 5.5$ V; $V_O = V_{CC}$ or GND	-	-	±0.5	-	±5.0	-	±10	μA
I _{CC}	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 5.5 \text{ V}$	-	-	8.0	-	80	-	160	μA
ΔI _{CC}	additional supply current	$V_I = V_{CC} - 2.1 \text{ V};$ other inputs at V_{CC} or GND; $V_{CC} = 4.5 \text{ V}$ to 5.5 V; $I_O = 0 \text{ A}$								
		Dn	-	30	108	-	135	-	147	μΑ
		LE	-	150	540	-	675	-	735	μΑ
		ŌĒ	-	100	360	-	450	-	490	μΑ
Cı	input capacitance		-	3.5	-	-	-	-	-	pF

10. Dynamic characteristics

Table 7. Dynamic characteristics

Voltages are referenced to GND (ground = 0 V); C_L = 50 pF unless otherwise specified; for test circuit see Fig. 12.

Symbol	Parameter	Conditions	Ta	_{mb} = 25	°C		-40 °C 85 °C		-40 °C 25 °C	Unit
			Min	Тур	Max	Min	Max	Min	Max	
74HC37	propagation delay $ \begin{array}{c} \text{Dn to Qn; see } \underline{\text{Fig. 8}} \\ V_{CC} = 2.0 \text{ V} \\ V_{CC} = 4.5 \text{ V} \\ V_{CC} = 5 \text{ V; } C_L = 15 \text{ p} \\ V_{CC} = 6.0 \text{ V} \\ \text{LE to Qn; see } \underline{\text{Fig. 9}} \\ V_{CC} = 2.0 \text{ V} \\ V_{CC} = 4.5 \text{ V} \\ V_{CC} = 4.5 \text{ V} \\ V_{CC} = 6.0 \text{ V} \\ \end{array} $ enable time $ \begin{array}{c} \text{OE to Qn; see } \underline{\text{Fig. 10}} \\ V_{CC} = 2.0 \text{ V} \\ V_{CC} = 4.5 \text{ V} \\ V_{CC} = 4.5 \text{ V} \\ V_{CC} = 6.0 \text{ V} \\ \end{array} $ disable time $ \begin{array}{c} \text{OE to Qn; see } \underline{\text{Fig. 10}} \\ V_{CC} = 2.0 \text{ V} \\ V_{CC} = 2.0 \text{ V} \\ V_{CC} = 4.5 \text{ V} \\ V_{CC} = 4.5 \text{ V} \\ V_{CC} = 6.0 \text{ V} \\ \end{array} $ transition time $ \begin{array}{c} \text{Qn; see } \underline{\text{Fig. 8}} \text{ and } \underline{\text{Fig. 8}} \\ \text{And } \underline{\text{Fig. 8}} \\ \text{And } \underline{\text{Fig. 8}} \\ \end{array} $									
t _{pd}		Dn to Qn; see Fig. 8 [1]								
	delay	V _{CC} = 2.0 V	-	41	150	-	190	-	225	ns
		V _{CC} = 4.5 V	-	15	30	-	38	-	45	ns
		V _{CC} = 5 V; C _L = 15 pF	-	12	-	-	-	-	-	ns
		V _{CC} = 6.0 V	-	12	26	-	33	-	38	ns
		LE to Qn; see Fig. 9								
		V _{CC} = 2.0 V	-	50	175	-	220	-	265	ns
		V _{CC} = 4.5 V	-	18	35	-	44	-	53	ns
		V _{CC} = 5 V; C _L = 15 pF	-	15	-	-	-	-	-	ns
		V _{CC} = 6.0 V	-	14	30	-	37	-	45	ns
t _{en}	enable time	OE to Qn; see Fig. 10 [2]								
		V _{CC} = 2.0 V	-	44	150	-	190	-	225	ns
		V _{CC} = 4.5 V	-	16	30	-	38	-	45	ns
		V _{CC} = 6.0 V	-	13	26	-	33	-	38	ns
t _{dis}	disable time	OE to Qn; see Fig. 10 [3]								
		V _{CC} = 2.0 V	-	47	150	-	190	-	225	ns
		V _{CC} = 4.5 V	-	17	30	-	38	-	45	ns
		V _{CC} = 6.0 V	-	14	26	-	33	-	38	ns
t _t	transition time	Qn; see Fig. 8 and Fig. 9 [4]								
		V _{CC} = 2.0 V	-	14	60	-	75	-	90	ns
		V _{CC} = 4.5 V	-	5	12	-	15	-	18	ns
		V _{CC} = 6.0 V	-	4	10	-	13	-	15	ns

tw	Parameter	Conditions	Т	_{amb} = 25	°C		: -40 °C 85 °C		-40 °C 25 °C	Unit
			Min	Тур	Max	Min	Max	Min	Max	
t _W	pulse width	LE HIGH; see Fig. 9								
		V _{CC} = 2.0 V	80	17	-	100	-	120	-	ns
		V _{CC} = 4.5 V	16	6	-	20	-	24	-	ns
		V _{CC} = 6.0 V	14	5	-	17	-	20	-	ns
t _{su}	set-up time	Dn to LE; see Fig. 11								
		V _{CC} = 2.0 V	50	14	-	65	-	75	-	ns
		V _{CC} = 4.5 V	10	5	-	13	-	15	-	ns
		V _{CC} = 6.0 V	9	4	-	11	-	13	-	ns
t _h	hold time	Dn to LE; see Fig. 11								
		V _{CC} = 2.0 V	+5	-8	-	5	-	5	-	ns
		V _{CC} = 4.5 V	+5	-3	-	5	-	5	-	ns
		V _{CC} = 6.0 V	+5	-2	-	5	-	5	-	ns
C _{PD}	power dissipation capacitance	per latch; V_I = GND to V_{CC}	5] -	45	-	-	-	-	-	pF
74HCT3	73									
t _{pd}	propagation	Dn to Qn; see Fig. 8	1]							
	delay	V _{CC} = 4.5 V	-	17	30	-	38	-	45	ns
		$V_{CC} = 5 \text{ V}; C_L = 15 \text{ pF}$	-	14	-	-	-	-	-	ns
		LE to Qn; see Fig. 9								
		V _{CC} = 4.5 V	-	16	32	-	40	-	48	ns
		V _{CC} = 5 V; C _L = 15 pF	-	13	-	-	-	-	-	ns
t _{en}	enable time	$\overline{\text{OE}}$ to Qn; V _{CC} = 4.5 V; [see Fig. 10]	2] -	19	32	-	40	-	48	ns
t _{dis}	disable time	OE to Qn; V _{CC} = 4.5 V; [see Fig. 10]	3] -	18	30	-	38	-	45	ns
t _t	transition time	Qn; V _{CC} = 4.5 V; see <u>Fig. 8</u> and <u>Fig. 9</u>	4] -	5	12	-	15	-	18	ns
t _W	pulse width	LE HIGH; V _{CC} = 4.5 V; see Fig. 9	16	4	-	20	-	24	-	ns
t _{su}	set-up time	Dn to LE; V _{CC} = 4.5 V; see <u>Fig. 11</u>	12	6	-	15	-	18	-	ns
t _h	hold time	Dn to LE; V _{CC} = 4.5 V; see <u>Fig. 11</u>	4	-1	-	4	-	4	-	ns
C _{PD}	power dissipation capacitance	per latch; [V _I = GND to (V _{CC} - 1.5 V)	5] -	41	-	-	-	-	-	pF

 f_i = input frequency in MHz;

f_o = output frequency in MHz;

C_L = output load capacitance in pF;

V_{CC} = supply voltage in V;

N = number of inputs switching;

 $\Sigma(C_L \times V_{CC}^2 \times f_0) = \text{sum of outputs.}$

 $[\]begin{array}{ll} \hbox{[1]} & t_{pd} \hbox{ is the same as } t_{PLH} \hbox{ and } t_{PHL}. \\ \hbox{[2]} & t_{en} \hbox{ is the same as } t_{PZH} \hbox{ and } t_{PZL}. \end{array}$

^[3] t_{dis} is the same as t_{PLZ} and t_{PHZ} .

t_t is the same as t_{THL} and t_{TLH}.
 C_{PD} is used to determine the dynamic power dissipation (P_D in μW).
 P_D = C_{PD} × V_{CC}² × f_i × N + Σ(C_L × V_{CC}² × f_o) where:

10.1. Waveforms

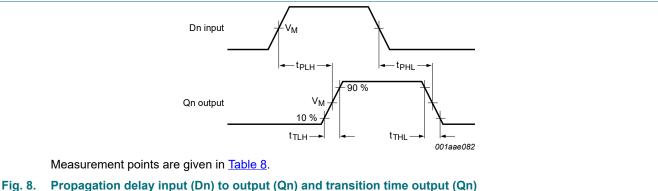


Fig. 8.



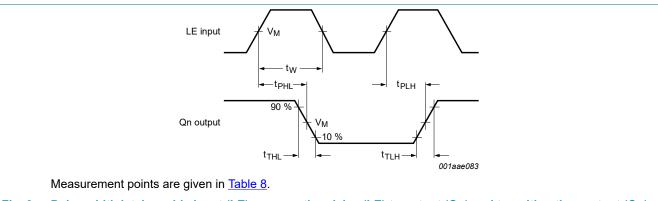


Fig. 9. Pulse width latch enable input (LE), propagation delay (LE) to output (Qn) and transition time output (Qn)

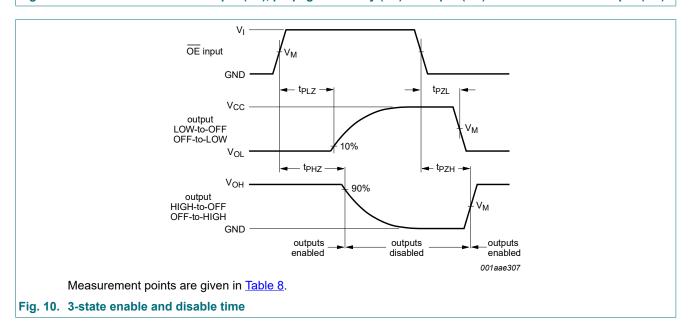

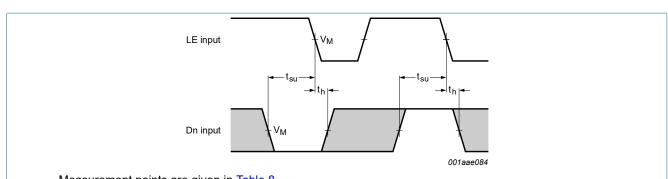


Measurement points are given in <u>Table 8</u>.

Fig. 11. Set-up and hold time data input (Dn) to latch enable input (LE)

Table 8. Measurement points

Туре	Input	Output
	V _M	V _M
74HC373	0.5V _{CC}	0.5V _{CC}
74HCT373	1.3 V	1.3 V

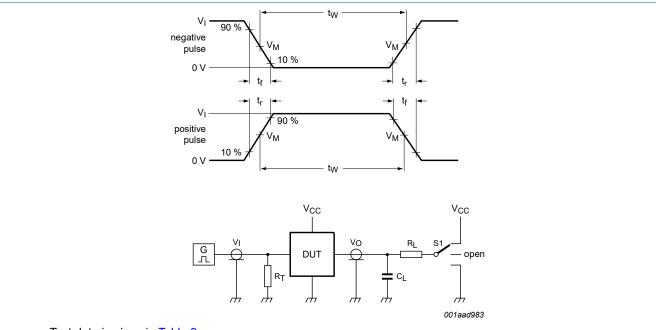

Test data is given in <u>Table 9</u>.

Definitions test circuit:

 R_T = Termination resistance should be equal to output impedance Z_0 of the pulse generator

 C_L = Load capacitance including jig and probe capacitance

R_L = Load resistor

S1 = Test selection switch

Fig. 12. Test circuit for measuring switching times


Table 9. Test data

Туре	Input		Input		Load		S1 position				
	V _I	t _r , t _f	CL	R _L	t _{PHL} , t _{PLH}	t _{PZH} , t _{PHZ}	t _{PZL} , t _{PLZ}				
74HC373	V _{CC}	6 ns	15 pF, 50 pF	1 kΩ	open	GND	V _{CC}				
74HCT373	3 V	6 ns	15 pF, 50 pF	1 kΩ	open	GND	V _{CC}				

11. Package outline

SO20: plastic small outline package; 20 leads; body width 7.5 mm

SOT163-1

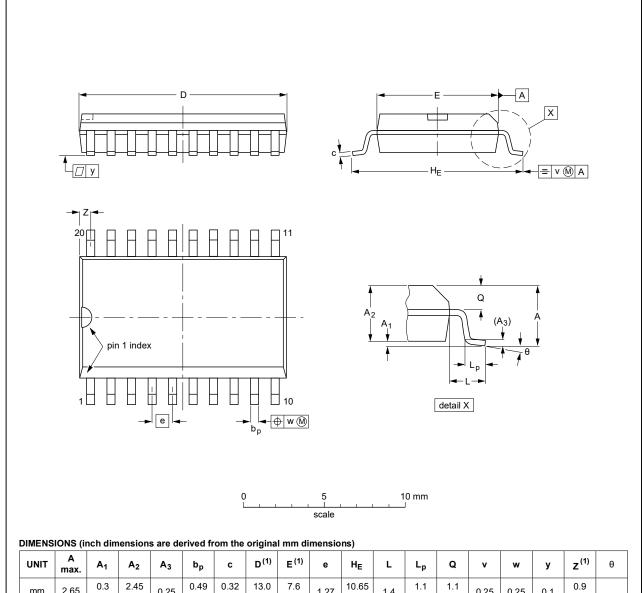

UNIT	A max.	A ₁	A ₂	A ₃	bp	С	D ⁽¹⁾	E ⁽¹⁾	е	HE	L	Lp	Q	v	w	у	z ⁽¹⁾	θ
mm	2.65	0.3 0.1	2.45 2.25	0.25	0.49 0.36	0.32 0.23	13.0 12.6	7.6 7.4	1.27	10.65 10.00	1.4	1.1 0.4	1.1 1.0	0.25	0.25	0.1	0.9 0.4	8°
inches	0.1	0.012 0.004	0.096 0.089	0.01	0.019 0.014	0.013 0.009	0.51 0.49	0.30 0.29	0.05	0.419 0.394	0.055	0.043 0.016	0.043 0.039	0.01	0.01	0.004	0.035 0.016	0°

1. Plastic or metal protrusions of 0.15 mm (0.006 inch) maximum per side are not included.

OUTLINE VERSION	REFERENCES			EUROPEAN	ISSUE DATE	
	IEC	JEDEC	JEITA		PROJECTION	ISSUE DATE
SOT163-1	075E04	MS-013				99-12-27 03-02-19

Fig. 13. Package outline SOT163-1 (SO20)

SSOP20: plastic shrink small outline package; 20 leads; body width 5.3 mm

SOT339-1

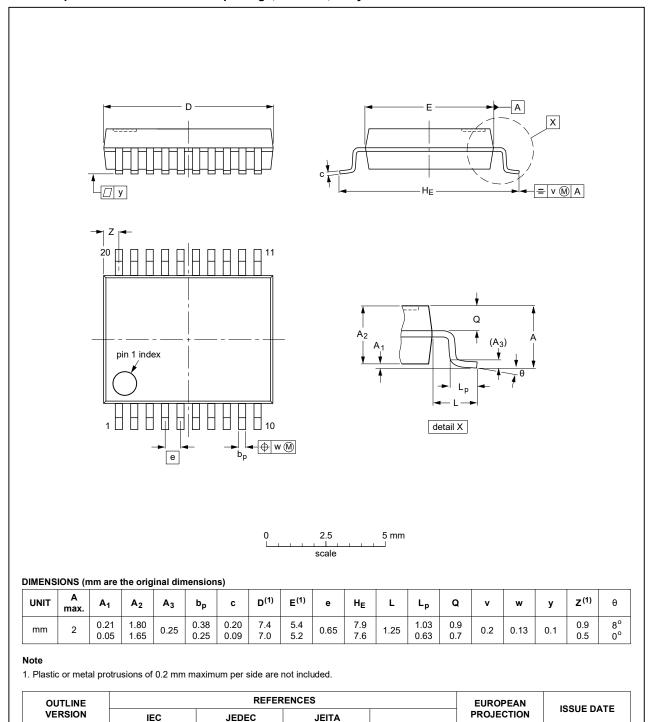


Fig. 14. Package outline SOT339-1 (SSOP20)

MO-150


SOT339-1

99-12-27

03-02-19

TSSOP20: plastic thin shrink small outline package; 20 leads; body width 4.4 mm

SOT360-1

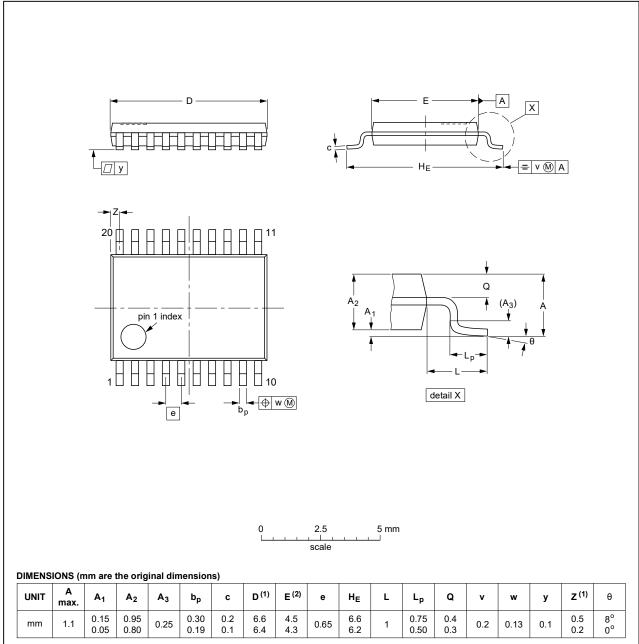

Notes

- 1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.
- 2. Plastic interlead protrusions of 0.25 mm maximum per side are not included.

OUTLINE	REFERENCES			EUROPEAN	ISSUE DATE	
VERSION	IEC	JEDEC	JEITA		PROJECTION	ISSUE DATE
SOT360-1		MO-153				99-12-27 03-02-19

Fig. 15. Package outline SOT360-1 (TSSOP20)

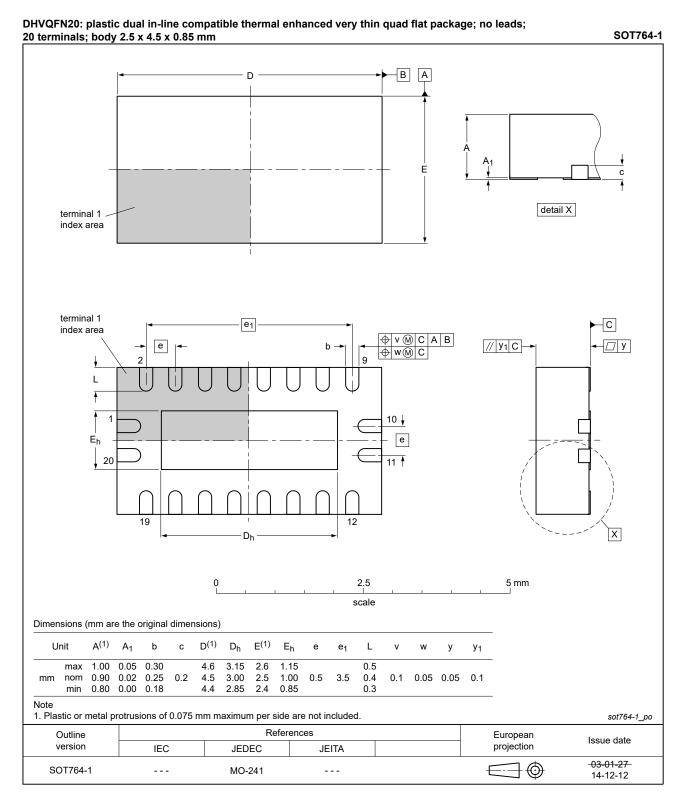


Fig. 16. Package outline SOT764-1 (DHVQFN20)

12. Abbreviations

Table 10. Abbreviations

Acronym	Description
CMOS	Complementary Metal Oxide Semiconductor
ESD	ElectroStatic Discharge
НВМ	Human Body Model
MM	Machine Model
TTL	Transistor-Transistor Logic

13. Revision history

Table 11. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes		
74HC_HCT373 v.7	20200722	Product data sheet	-	74HC_HCT373 v.6		
Modifications:	 The format of this data sheet has been redesigned to comply with the identity guidelines of Nexperia. Legal texts have been adapted to the new company name where appropriate. Type number 74HCT373DB (SOT339-1/SSOP20) removed. Table 4: Derating values for P_{tot} total power dissipation updated. 					
74HC_HCT373 v.6	20160226	Product data sheet	-	74HC_HCT373 v.5		
Modifications:	Type number	Type numbers 74HC373N and 74HCT373N (SOT146-1) removed.				
74HC_HCT373 v.5	20111213	Product data sheet	-	74HC_HCT373 v.4		
Modifications:	Legal pages	s updated.				
74HC_HCT373 v.4	20100903	Product data sheet	-	74HC_HCT373 v.3		
74HC_HCT373 v.3	20060120	Product data sheet	-	74HC_HCT373_CNV v.2		
74HC_HCT373_CNV v.2	19970827	Product specification	-	-		

14. Legal information

Data sheet status

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at https://www.nexperia.com.

Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal

injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nexperia.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

Contents

1.	General description	1
2.	Features and benefits	1
3.	Ordering information	2
4.	Functional diagram	2
	Pinning information	
5.1	. Pinning	4
5.2	Pin description	4
6.	Functional description	5
7.	Limiting values	5
8.	Recommended operating conditions	5
	Static characteristics	
10	Boundary to the control of the Control	
10	Dynamic characteristics	7
	Waveforms	
10.	1. Waveforms	9
10. 11 .	•	9
10. 11 . 12 .	1. Waveforms	9 1 5
10. 11. 12.	1. Waveforms	9 1 5

For more information, please visit: http://www.nexperia.com For sales office addresses, please send an email to: salesaddresses@nexperia.com Date of release: 22 July 2020

[©] Nexperia B.V. 2020. All rights reserved