




Złącze STL950/10G-5.0-H 10 PIN kąt. 15A 300V PTR MESSTECHNIK RoHS

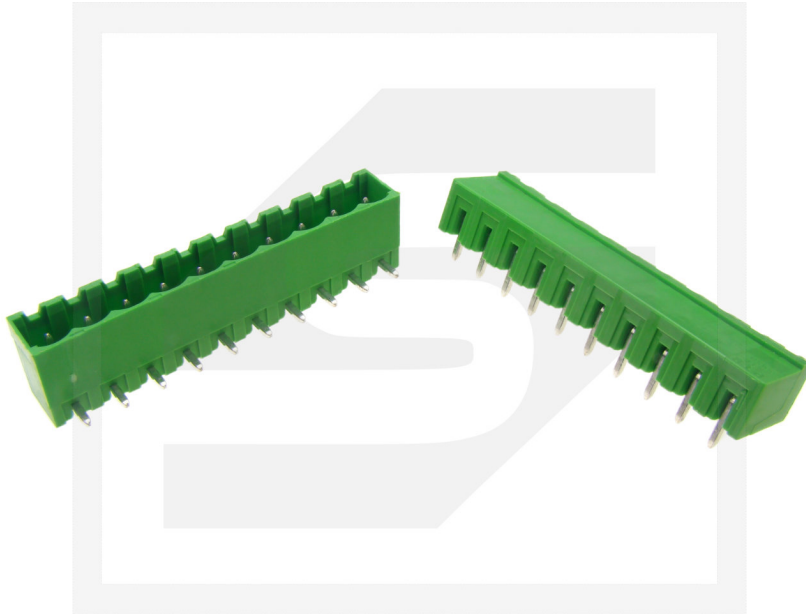

Dane techniczne:

Nazwa: STL950/10G-5.0-H
Typ łączówki: rozłączna ARK
Liczba torów: 10 torów
Raster wyprowadzeń: R=5,00mm
Wysokość (bez pinów): 12mm
Prąd znamionowy: 15A
Napięcie znamionowe: 300V
Montaż złącza: przewlekany (THT)
Kolor: zielony
Producent: PTR Messtechnik
Certyfikaty: RoHS


www.podzespoly-elektroniczne.pl



PTR

A Phoenix Mecano Company

STL(Z) 950 VERTICAL

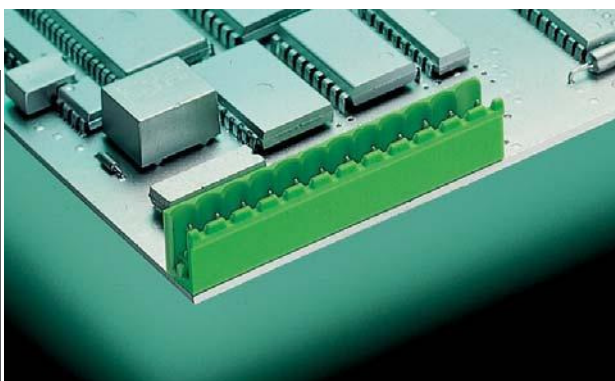


STL(Z) 950/.. - 5.0 (5.08) - V - GREEN

**2-24 poles, Spacing 5,0 mm or 5,08 mm
insert required no. of poles ..**

How to order see page 11

STL(Z) 950 HORIZONTAL

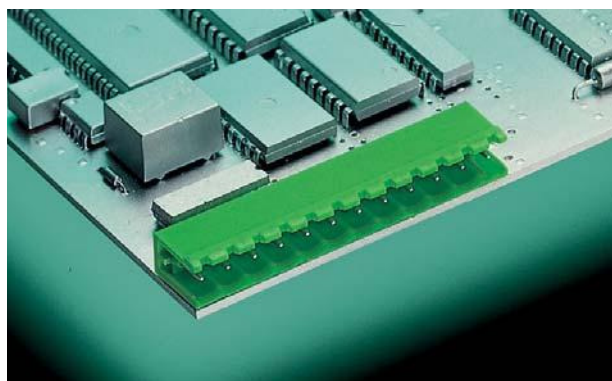

STL(Z) 950/.. - 5.0 (5.08) - H - GREEN

**2-24 poles, Spacing 5,0 mm or 5,08 mm
insert required no. of poles ..**

How to order see page 11

Ratings:

Rated Voltage	300 V	250 V
Rated Current	15 A	12 A (T60)
Overtoltage Category		III
Rating Impulse Voltage/Dirt Level		4 kV/3

Ratings:

Rated Voltage	300 V	250 V
Rated Current	15 A	12 A (T60)
Overtoltage Category		III
Rating Impulse Voltage/Dirt Level		4 kV/3

Dimensions

Spacing	5,0 mm (5,08 mm)
PCB Hole Diameter	1,4 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Contact Pin	Cu

Colour

green	RAL 6018
-------	----------

Dimensions

Spacing	5,0 mm (5,08 mm)
PCB Hole Diameter	1,4 mm


Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Contact Pin	Cu

Colour

green	RAL 6018
-------	----------

STL(Z) 950 VERTICAL

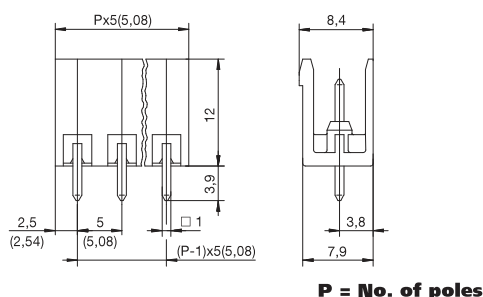

STL(Z) 950 HORIZONTAL

