



# Przełącznik NVF4-2C 12VDC 30/40A NHG 1 st. przełączny z uchem RoHS



## Dane techniczne:

Nazwa: NVF4-2C 12VDC


Wersja przełącznika: samochodowy

Konfiguracja styków: 1 styk przełączny

Napięcie cewki nominalne: 12VDC

Prąd styków maks. : 30/40A

# NVF4-1 & NVF4-2

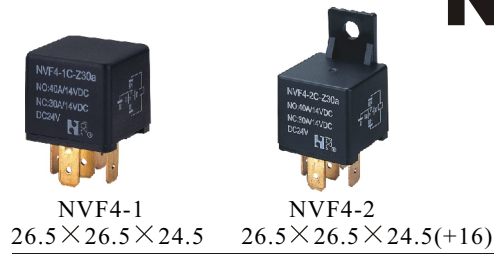

NVF4-1 26.5×26.5×24.5  
NVF4-2 26.5×26.5×24.5(+16)

Features
<ul style="list-style-type: none"> <li>Small size and light weight.</li> <li>Heavy contact load (40A).</li> <li>Suitable for automobile and lamp accessories application.</li> <li>PC board mounting and direct insert mounting available.</li> </ul>

Ordering Information
<p><b>NVF4-1 C Z 30 b DC12V 1.6 C D</b></p> <p>1 2 3 4 5 6 7 8 9</p>
<p>1 Part number: NVF4-1, NVF4-2 (Insulation Bracket), NVF4-2a (Shrouded Type With Metal Bracket, Contact Arrangement: 1A, 1B, 1C), NVF4-2b (Shrouded Type With Metal Bracket, Contact Arrangement: 1U)</p> <p>2 Contact arrangement: A: 1A; B: 1B; C: 1C; C2: 1C2; U: 1U</p> <p>3 Enclosure: S: Sealed type; Z: Dust cover;</p> <p>4 Contact current: A Form: 2×20A, 40A; B Form: 30A, 40A; C Form: 30A, 40A; U Form: 2×20A</p> <p>5 Terminals: b: PCB type; a1: plug in type 1; a2: plug in type 2</p> <p>6 Coil rated voltage (V): DC: 6, 12, 24</p> <p>7 Coil power consumption: 1.6: 1.6W; 1.9: 1.9W</p> <p>8 Contact material: C: AgCdO; N: AgNi; NIL: AgSnO<sub>2</sub></p> <p>9 Coil transient suppression: D: with diode; 2D: with two diodes; R: with resistance; DR: with diode and resistance; NIL: standard</p>

Contact Data				
Contact Arrangement	1A (SPSTNO), 1B (SPSTNC), 1C (SPDT(B-M)), 1U (SPSTNODM)			
Contact Material	AgSnO <sub>2</sub> , AgNi			
Contact Rating (resistive)	1A	1B	1C	1U
	40A, 2×20A/14VDC	30A/14VDC	NO: 40A/14VDC NC: 30A, 40A/14VDC	2×20A/14VDC
Max. Switching Power	630W			
Max. Switching Voltage	75VDC		Max. Switching Current: 40A	
Contact Resistance or Voltage drop	≤ 30mΩ		Item 4.12 of IEC 61810-7	
Operation life	Electrical	10 <sup>9</sup>		Item 4.30 of IEC 61810-7
	Mechanical	10 <sup>7</sup>		Item 4.31 of IEC 61810-7

Coil Parameter								
Dash numbers	Coil voltage VDC		Coil resistance Ω ±10%	Pick up voltage VDC(max) (65% of rated voltage)	Release voltage VDC(min) (10% of rated voltage)	Coil power consumption W	Operate Time ms	Release Time ms
	Rated	Max.						
006-1600	6	7.8	22.5	3.9	0.6	1.6	<7	<5
009-1600	9	11.7	50.6	5.9	0.9			
012-1600	12	15.6	90	7.8	1.2			
024-1600	24	31.2	360	15.6	2.4			
048-1600	48	62.4	1440	31.2	4.8			
006-1900	6	7.8	19	3.9	0.6	1.9	<7	<5
012-1900	12	15.6	75.8	7.8	1.2			
024-1900	24	31.2	303.2	15.6	2.4			

**CAUTION:** 1. The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.  
2. Pick up and release voltage are for test purposes only and are not to be used as design criteria.


## Operation condition

Insulation Resistance <sup>1)</sup>	100MΩ min (at 500VDC)	Item 7 of IEC 61810-5
Dielectric Strength <sup>1)</sup>	50Hz 500V	Item 6 of IEC 61810-5
Between contacts	50Hz 750V	Item 6 of IEC 61810-5
Between contact and coil		
Shock resistance	147m/s <sup>2</sup> 11ms	IEC68-2-27 Test Ea
Vibration resistance	10~40Hz double amplitude 1.5mm	IEC68-2-6 Test Fc
Terminals strength	8N 4N (PC type)	IEC68-2-21 Test Ua2
Solderability	235°C ±2°C 3 ±0.5s	IEC68-2-20 Test Ta method 1
Ambient Temperature	-40~125°C	
Relative Humidity	85% (at 40°C)	IEC68-2-3 Test Ca
Mass	31g (NVF4-1); 36g (NVF4-2)	

Note: 1). When testing, coil terminals should be connected, If coil transient suppression is installed in relay.

## Dimensions

mm / inch

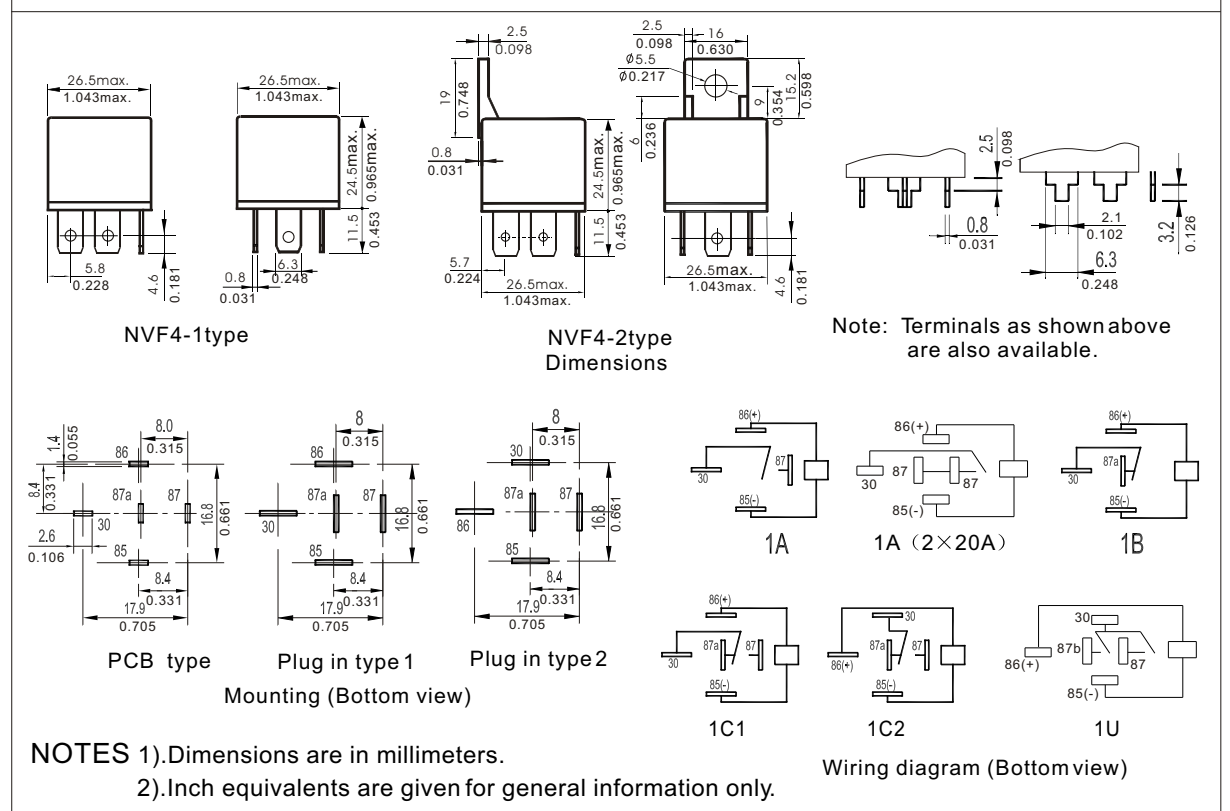

## Reference Data

